
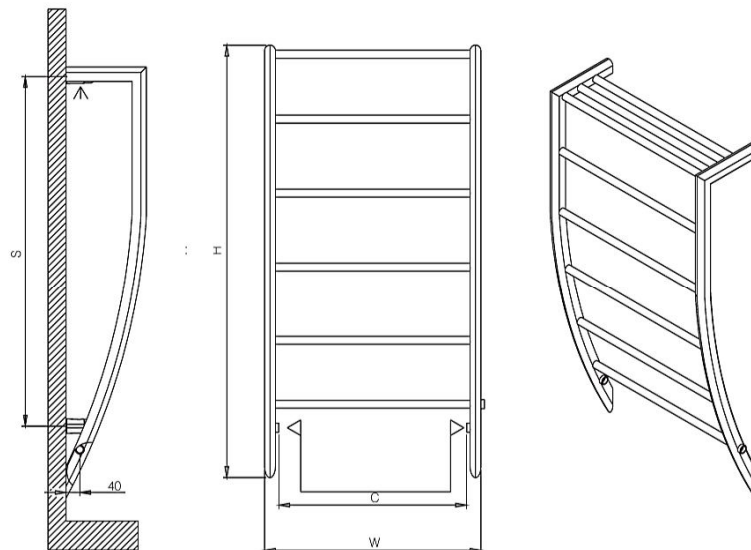


Eastbrook

Eastbrook Road, Gloucester GL4 3DB
 Technical Helpline: 01452 317890
 email: technical@eastbrookco.com



max. working pressure
 betriebsüberdruck 10 bar

max. working temperature
 betriebstemperatur 95 °C

all dimensions are in
 alle masse sind in mm.

connections
 anschlüsse 1/2"

optional heating element usage available
 optional heizstab verwendung benutzbar



portofino

material	finish ausführung	installation aufstellung	warranty garantie
steel / stahl	RAL painted / farbe chrome plated / verchromt	vertical / vertikal	5 years / 5 Jahre

Product Code Artikelnummer	Width Baulänge	Height Bauhöhe	Depth Bautiefe	Conn Centers Anschlussachse	Tube Quantity Rohranzahl	Assembly Axis Montageachse		Weight Gewicht	Water Capacity Wasserinhalt	Thermal Power (painted) Wärmeleistung (lackiert)			Thermal Power (chrome) Wärmeleistung (verchromt)		
	W	H	D	C		S	L	kg.	lt.	btu	k/cal	watt	btu	k/cal	watt
POR0500120008	500	1200	225	420	8	970	360	5,4	3,9	1214	306	356	912	229	267
POR0600120008	600	1200	225	520	8	970	460	5,8	4,1	1323	333	388	994	250	291

While installing connections, valve distance from the bottom left-right sides must be reduced from the C value. (90 mm for Carisa Valves)