



Markwik 21 Bib Mixer Thermostatic, Sensor Time Flow, Bioguard

Illustrated

A6062 (TB H6) Markwik 21 integral thermostat, bib mixer, time flow sensor, single flow horizontal outlet, 2 x 1/2" inlets at 200mm centres, Armitage Bioguard outlet fitted

Configuration options

Material

Chrome Plated Metal

Weights

A6062 5.80KG

Colours

Chromium plated (AA)

Standards

Conforms to HTM64 (2006), HTM04, HFN30


Special Notes

This product is fitted with an Armitage Bioguard outlet which reduces the opportunity for bio film attachment and is lined with anti-microbial copper.

Tap is activated by hand movement over the sensor and water will run for a predetermined length of time, factory pre-set at 1 minute but adjustable. Unique built-in thermal disinfection cleansing feature using kit S8239NU a bridging hose which is re-usable. A purging tool A4556AA is also available to facilitate initial installation or aid in system disinfection.

* Line drawing shows recommended height over scrub up troughs.

Flow rate regulated to maximum of 10 Litres per minute.

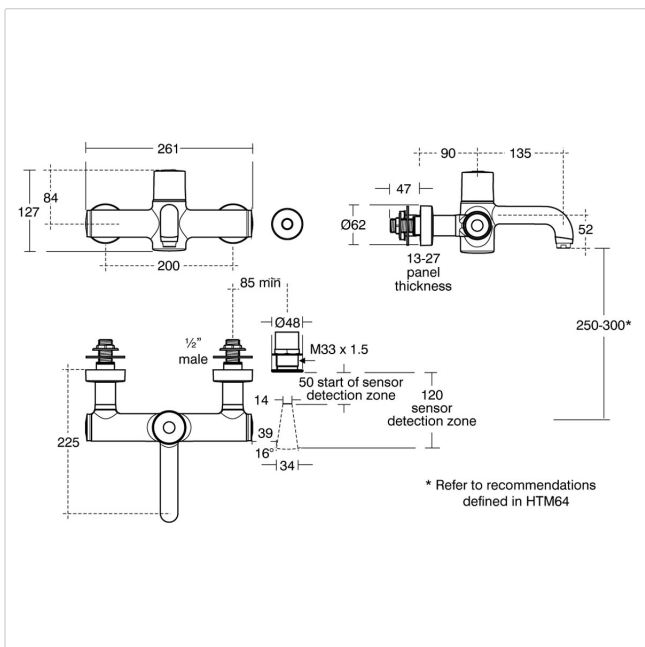

Frequently used applications

General Healthcare

Hospitals

Features

HTM

Accreditations

TMV3

WRAS

*Armitage
Shanks*

Tel: 0870 122 8822
Fax: 0870 122 8282
Email: info@idealspec.co.uk
Web: www.idealspec.co.uk

Ideal Standard (UK) Ltd. makes every effort to ensure that the information provided on its website is accurate. However, we cannot guarantee this, and accept no liability for any information or advice given via its website.

Powered by
IdealSpec

Date created:06/01/2014