

GRUNDFOS A WIDE RANGE
50 Hz



BE > THINK > INNOVATE >

GRUNDFOS 



A global business

With over 16 000 employees and annual production of some 16 million pump units a year, Grundfos is one of the world's leading pump manufacturers. 82 companies in 45 countries right across all the continents of the globe help to bring pumps to every corner of the world, from supplying drinking water to Antarctic expeditions, irrigation of Dutch tulips, groundwater monitoring beneath waste heaps in Germany, to air-conditioning in Egyptian hotels.

Efficient, sustainable products

Grundfos is constantly striving to make its products more user friendly and reliable – and also energy-saving and efficient, so that both users and the environment benefit from their improvements.

Grundfos pumps are equipped with ultramodern electronics, allowing them to regulate their output according to current needs. This not only ensures convenience for the user, but also saves a great deal of energy.

Research and development

In order to maintain its leading position, Grundfos constantly places a great deal of emphasis on customer oriented research and development; customers are consulted when new products are developed or when



established products are improved.

Research and development make use of the latest technology within the pump industry, collaborating with universities and higher education institutions in search of new and better solutions for the design and function of the products.

Corporate values

The Grundfos Group is based on values such as sustainability, openness, trustworthiness, responsibility, and also on partnership with clients, suppliers and the whole of society around us, with a focus on humanity that concerns our own employees as well as the many millions who benefit from water that is procured, utilised and removed as wastewater with the help of Grundfos pumps.


Pumps for all purposes

No matter for which purpose an efficient and energy saving pump solution is required, Grundfos offers a high-quality solution.



Heating and hot-water service systems

Circulator pumps for circulation of hot water in central and district heating systems and circulation in domestic hot water service systems.

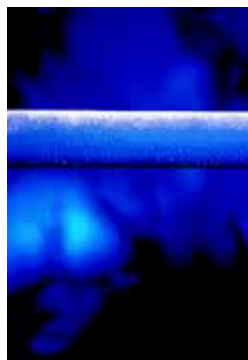

Cooling and air-conditioning systems

Circulator pumps for circulation of cold water and other liquids in cooling and air-conditioning systems.



Industrial applications

A wide range of pumps for the transfer of water, cooling lubricants and other liquids in industrial and process systems.



Pressure boosting and liquid transfer

Vertical and horizontal, centrifugal pumps and pressure booster systems for liquid transfer and boosting of hot and cold water.



Groundwater supply

Submersible and dry installed pumps for groundwater supply, irrigation and groundwater lowering.



Domestic water supply

Submersible pumps, jet pumps, multistage centrifugal pumps and compact systems for water supply in homes, gardens and hobby applications.



Wastewater

Drainage, effluent and sewage pumps, for a wide range of applications in building services, the industry as well as transfer of raw sewage in municipal sewage systems and treatment plants.



Environmental applications

Purpose-built submersible pumps for remedial pumping of contaminated groundwater and for sampling for water quality analyses.



Dosing and disinfection

Dosing pumps, disinfection systems and measuring & control for wastewater treatment systems, swimming pools and industry.



Renewable-energy systems

Renewable-energy-based water supply systems suitable for remote locations not connected to the electricity supply grid.

Product and application overview

Heating and hot-water service systems

| | |
|---|----|
| GRUNDFOS ALPHA2, UPS, UP Series 100 | 8 |
| GRUNDFOS COMFORT UP-N, UP(S)-B Series 100 | 8 |
| GRUNDFOS MAGNA, Series 2000 | 9 |
| NB, NBG | 10 |
| NBE, NBGE | 10 |
| NK, NKG | 11 |
| NKE, NKGE | 11 |
| TP | 9 |
| TPE Series 1000 | 10 |
| TPE Series 2000 | 9 |
| UPS Series 200 | 8 |

Cooling and air-conditioning systems

| | |
|---|----|
| AC | 20 |
| CHIU | 19 |
| CHV | 29 |
| CM, CME | 20 |
| CR, CRI, CRN | 21 |
| CRE, CRIE, CRNE | 21 |
| GRUNDFOS ALPHA2, UPS, UP Series 100 | 8 |
| GRUNDFOS COMFORT UP-N, UP(S)-B Series 100 | 8 |
| NB, NBG | 10 |
| NBE, NBGE | 10 |
| NK, NKG | 11 |
| NKE, NKGE | 11 |
| TP | 9 |
| TPE Series 1000 | 10 |
| TPE Series 2000 | 9 |
| UPS Series 200 | 8 |

Industrial applications

| | |
|-------------------------|----|
| AC | 20 |
| AMD, AMG, AFG | 34 |
| BM, BMB | 26 |
| BME, BMET | 26 |
| BMEX | 26 |
| BMP | 25 |
| CHIU | 19 |
| CHV | 29 |
| CM, CME | 20 |
| Contra | 23 |
| CR Monitor | 21 |
| CR, CRI, CRN | 21 |

| | |
|---|----|
| CRE, CRIE, CRNE | 21 |
| CRT | 22 |
| DP, EF, SL1 and SLV | 32 |
| durietta | 24 |
| DW | 31 |
| Euro-HYGIA® | 23 |
| F&B-HYGIA® | 23 |
| Hydro MPC, Hydro Multi-E/-S Hydro Solo-E/-S | 25 |
| MAXA and MAXANA | 24 |
| MTB | 13 |
| MTS | 13 |
| NB, NBG | 10 |
| NBE, NBGE | 10 |
| NK, NKG | 11 |
| NKE, NKGE | 11 |
| NOVAlobe | 25 |
| S pumps | 33 |
| SE | 35 |
| SEN | 34 |
| SIPLA | 24 |
| SPK, MTH, MTR, MTA | 12 |
| SPKE, MTRE | 12 |
| SRP | 34 |

Pressure boosting and liquid transfer

| | |
|---|----|
| AC | 20 |
| BM, BMB | 26 |
| BME, BMET | 26 |
| BMEX | 26 |
| CHIU | 19 |
| CHV | 29 |
| CHV booster | 30 |
| CM, CME | 20 |
| CMBE | 20 |
| CR, CRI, CRN | 21 |
| CR, CRN high pressure | 22 |
| CRE, CRIE, CRNE | 21 |
| CRT | 22 |
| HS | 11 |
| Hydro MPC, Hydro Multi-E/-S Hydro Solo-E/-S | 25 |
| MQ | 29 |
| NB, NBG | 10 |
| NBE, NBGE | 10 |
| NK, NKG | 11 |
| NKE, NKGE | 11 |


| | | | |
|---|----|--|----|
| TPE Series 1000 | 10 | Dosing and disinfection | |
| Groundwater supply | | Conex® DIA, DIS | 16 |
| SP A, SP, SP-G | 27 | Conex® DIA-G, DIS-G | 16 |
| SQ, SQE | 27 | DDI | 14 |
| Domestic water supply | | DIP | 16 |
| CHV | 29 | DIT-B | 17 |
| CHV booster | 30 | DME | 13 |
| CM, CME | 20 | DMH | 15 |
| CR DW | 22 | DMI | 14 |
| CR, CRI, CRN | 21 | DMS | 14 |
| CRE, CRIE, CRNE | 21 | DMX | 15 |
| Hydro MPC, Hydro Multi-E/-S Hydro Solo-E/-S | 25 | DTS | 19 |
| JP | 28 | HydroProtect | 19 |
| MQ | 29 | Oxiperm | 18 |
| RMQ | 29 | Oxiperm Pro | 18 |
| SP A, SP, SP-G | 27 | Polydos, KD | 18 |
| SPO | 37 | Selcoperm | 17 |
| SQ, SQE | 27 | Vaccuperm | 17 |
| Wastewater | | Renewable-energy systems | |
| AMD, AMG, AFG | 34 | SQFlex | 28 |
| CHIU | 19 | Fire systems | |
| Conlift | 30 | Fire DNF, Fire HSEF | 12 |
| Conlift L | 30 | Motors, controls and accessories | |
| DP, EF, SL1 and SLV | 32 | Accessories for dosing pumps and systems | 15 |
| DPK | 32 | CIM / CIU | 40 |
| DW | 31 | Control MPC | 39 |
| DWK | 31 | Control MPC Series 2000 | 39 |
| LC, LCD 107, 108 and 110 | 35 | CR Monitor | 21 |
| Liftaway B and C | 37 | CU100 | 35 |
| Lifting stations | 36 | CUE | 38 |
| Pomona | 32 | Dedicated Controls | 36 |
| PUST | 33 | DPI | 41 |
| S pumps | 33 | GT-HR tanks for heating | 42 |
| SE | 35 | LC, LCD 107, 108 and 110 | 35 |
| SEG | 33 | LiqTec | 38 |
| SEN | 34 | MMS motors | 38 |
| Sololift+ | 36 | MP 204, CU 300, CU 301 | 39 |
| SRP | 34 | MS motors | 37 |
| Unilift CC, KP, AP, AP-B | 31 | Pressure tanks | 41 |
| Environmental applications | | R100 | 40 |
| CR, CRI, CRN | 21 | RPS and DPS 100 | 41 |
| CRE, CRIE, CRNE | 21 | VFS | 40 |
| CRT | 22 | | |
| MP 1 | 28 | | |
| SQE-NE, SP-NE | 27 | | |





GRUNDFOS ALPHA2, UPS, UP Series 100

Circulator pumps, canned-rotor type



Technical data

Flow, Q: max. 10 m³/h
 Head, H: max. 12 m
 Liquid temp.: -25 °C to +110 °C
 Operat. pressure: max. 10 bar.

Applications

- Heating systems
- Domestic hot-water systems
- Cooling and air-conditioning systems.

Features and benefits

- Low-energy
Energy labelling class C to A
- Maintenance-free
- Low-noise
- Wide range.


Options

- Automatic performance adjustment
- Display of actual power consumption
- Automatic night setback
- Simple installation - external plug for electrical connection
- Single-speed or 2- or 3-speed performance adjustment
- Twin-head versions.



GRUNDFOS COMFORT UP-N, UP(S)-B Series 100

Circulator pumps, canned-rotor type



Technical data

Flow, Q: max. 10.5 m³/h
 Head, H: max. 7 m
 Liquid temp.: -25 °C to +110 °C
 Operat. pressure: max. 10 bar.

Applications

- Heating systems
- Domestic hot-water systems
- Cooling and air-conditioning systems.

Features and benefits

- Maintenance-free
- Low-noise
- Low-energy
- Wide range
- Corrosion-resistant stainless steel/brass pump housing.


Options

- 24-hour timer
- Adjustable thermostat.



UPS Series 200

Circulator pumps, canned-rotor type



Technical data

Flow, Q: max. 70 m³/h
 Head, H: max. 18 m
 Liquid temp.: -10 °C to +120 °C
 Operat. pressure: max. 10 bar.

Applications

- Heating systems
- Domestic hot-water systems
- Cooling and air-conditioning systems.

Features and benefits

- Maintenance-free
- Built-in thermal switch
- Low-noise
- Low-energy
Energy labelling up to class B
- Single-phase with built-in protection module
- Wide range.


Options

- Protection module
- Relay module with fault signal or operating output
- Bronze pump housing
- Twin-head versions.



GRUNDFOS MAGNA, Series 2000

Circulator pumps, canned-rotor type - electronically controlled



Technical data

Flow, Q: max. 90 m³/h
 Head, H: max. 12 m
 Liquid temp.: + 15 °C to + 110 °C
 Operat. pressure: max. 10 bar.

Applications

- Heating systems in blocks of flats, schools, hospitals, hotels, industry etc.

Features and benefits

- Low-noise
- Low-energy
Energy labelling: Class A
- Wide range
- Automatic performance adjustment
- Simple installation (no extra equipment or fittings required)
- Safe selection.


Options

- Stainless steel pump housing
- Twin-head versions
- Wireless remote control, R100
- Communication via GENIbus or LON.



TP

Circulator pumps, close-coupled type



Technical data

Flow, Q: max. 4600 m³/h
 Head, H: max. 170 m
 Liquid temp.: - 25 °C to + 150 °C
 Operat. pressure: max. 25 bar.

Applications

- Heating systems
- District heating plants
- Local heating plants
- Domestic hot-water systems
- Cooling and air-conditioning systems
- District cooling plants
- Water supply systems.

Features and benefits

- Compact design
- Wide range
- Standard EFF1/IE2 motor
- Service-friendly
- Various types of shaft seals depending on liquid, temperature and pressure.


Options

- Bronze pump housing
- Bronze impeller
- Stainless steel impeller
- Twin-head versions.



TPE Series 2000

Single-stage, centrifugal pumps - electronically controlled



Technical data

Flow, Q: max. 340 m³/h
 Head, H: max. 90 m
 Liquid temp.: - 25 °C to + 140 °C
 Operat. pressure: max. 16 bar.

Applications

- Heating systems
- Domestic hot-water systems
- Cooling and air-conditioning systems.

Features and benefits

- Low-energy
- Adaptation to existing operating conditions
- Simple installation.


Options

- Wireless remote control, R100
- Communication via GENIbus, BACnet MS/TP, LON, Modbus RTU or Profibus DP
- Twin-head versions.



TPE Series 1000

Single-stage, centrifugal pumps - electronically controlled



Technical data

Flow, Q: max. 340 m³/h
 Head, H: max. 90 m
 Liquid temp.: - 25 °C to + 140 °C
 Operat. pressure: max. 16 bar.

Applications

- Heating systems
- District heating plants
- Local heating plants
- Domestic hot-water systems
- Cooling and air-conditioning systems
- District cooling plants
- Water supply systems.


Features and benefits

- Low-energy
- Adaptation to existing operating conditions
- Simple installation
- Many control facilities
- Wireless remote control, R100
- Communication via GENIbus, BACnet MS/TP, LON, Modbus RTU or Profibus DP.



NB, NBG

Single-stage standard pumps



Technical data

Flow, Q: max. 1000 m³/h
 Head, H: max. 160 m
 Liquid temp.: - 25 °C to + 140 °C
 Operat. pressure: max. 25 bar.

Applications

- District heating plants
- Heating systems for blocks of flats
- Air-conditioning systems
- Cooling systems
- Washdown systems
- Other industrial systems.

Features and benefits

- Standard dimensions according to EN and ISO standards
- Compact design
- Flexible pump range
- Standard motor
- Adaptable to any application and performance
- EN 12756 shaft seal.


Optional

- Various types of shaft seal depending on liquid, temperature and pressure
- Cast iron, bronze or stainless steel impeller
- Cast iron or stainless steel pump housing.



NBE, NBGE

Single-stage standard pumps - electronically controlled



Technical data

Flow, Q: max. 550 m³/h
 Head, H: max. 100 m
 Liquid temp.: - 25 °C to + 140 °C
 Operat. pressure: max. 25 bar.

Applications


- District heating plants
- Heating systems for blocks of flats
- Air-conditioning systems
- Cooling systems
- Washdown systems
- Other industrial systems.

Features and benefits

- Standard dimensions according to EN and ISO standards
- Compact design
- Flexible pump range
- Standard motor
- Adaptable to any application and performance
- EN 12756 shaft seal.


Optional

- Various types of shaft seal depending on liquid, temperature and pressure
- Cast iron, bronze or stainless steel impeller
- Cast iron or stainless steel pump housing.

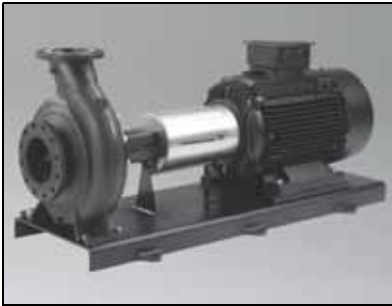

NK, NKG

Single-stage standard pumps according to EN 733, ISO 2858 and ISO 5199



Technical data

Flow, Q: max. 1170 m³/h
 Head, H: max. 160 m
 Liquid temp.: -25 °C to +140 °C
 Operat. pressure: max. 25 bar.

Applications

- District heating plants
- Water supply systems
- Air-conditioning systems
- Cooling system
- Washdown system
- Fire fighting systems
- Other industrial systems.

Features and benefits

- Standard dimensions according to EN and ISO standards
- Robust design
- Wide range
- Standard motor
- Adaptable to any application and performance
- EN 12756 shaft seal.


Optional

- Various types of shaft seal depending on liquid, temperature and pressure
- Cast iron, bronze or stainless steel impeller
- Cast iron or stainless steel pump housing.



NKE, NKGE

Single-stage standard pumps according to EN 733, ISO 2858 and ISO 5199 - electronically controlled



Technical data

Flow, Q: max. 550 m³/h
 Head, H: max. 100 m
 Liquid temp.: -25 °C to +140 °C
 Operat. pressure: max. 25 bar.

Applications

- District heating plants
- Water supply systems
- Air-conditioning systems
- Cooling systems
- Washdown systems
- Other industrial systems.

Features and benefits

- Standard dimensions according to EN and ISO standards
- Robust design
- Wide range
- Standard motor
- Adaptable to any application and performance
- EN 12756 shaft seal.


Options

- Various types of shaft seal depending on liquid, temperature and pressure
- Cast iron, bronze or stainless steel impeller
- Cast iron or stainless steel pump housing.



HS

Horizontal split case pumps



Technical data

Flow, Q: max. 2500 m³/h
 Head, H: max. 148 m
 Liquid temp.: 0 °C to +100 °C
 Operat. pressure: max. 16 bar.

Applications

- Water supply systems
- Air-conditioning systems
- Cooling systems
- Irrigation systems
- Other industrial systems.

Features and benefits

- Flange dimensions according to EN 1092-2 (DIN 2501)
- Robust design
- Double suction and volute design
- Wide range
- Standard motor
- Adaptable to any application and performance
- Removable bearing housing for easy maintenance.


Options

- Ductile iron and cast iron pump casing
- Stuffing box
- Bronze, aluminium bronze and stainless steel impeller.



Fire DNF, Fire HSEF

Fire pump systems



Technical data

Electrically powered

Flow, Q: 250-4500 GPM
Head, H: max. 182 psi

Diesel powered

Flow, Q: 250-4000 GPM
Head, H: max. 212 psi
Liquid temp.: 5 °C to 40 °C.

Applications

- Fire pump sets for fire extinguishing systems.


Features and benefits

- Electrically powered or diesel powered
- FM approved and UL listed
- Simple installation and easy maintenance
- Designed for superior functionality and performance reliability.



SPK, MTH, MTR, MTA

Multistage centrifugal immersible pumps



Technical data

Flow, Q: max. 85 m³/h
Head, H: max. 238 m
Liquid temp.: - 10 °C to + 90 °C
Operat. pressure: max. 25 bar.

Applications

- Machine tools
- Components washing machines
- Chiller units
- Industrial washing machines
- Filter and conveyor systems
- Temperature control
- Boiler feed
- General pressure boosting.


Features and benefits

- Flexible installation length
- Wide range
- Reliability
- Service-friendly
- Simple installation
- Space-saving
- High efficiency.



SPKE, MTRE

Multistage centrifugal immersible pumps - electronically controlled



Technical data

Flow, Q: max. 22 m³/h
Head, H: max. 245 m
Liquid temp.: - 10 °C to + 90 °C
Operat. pressure: max. 25 bar.

Applications

- Machine tools
- Components washing machines
- Chiller units
- Industrial washing machines
- Filter and conveyor systems
- Temperature control
- Boiler feed
- General pressure boosting.

Features and benefits

- Wide range
- Reliability
- Service-friendly
- Simple installation
- Space-saving
- High efficiency
- Many control facilities.


Options

- Wireless remote control, R100.



MTS

High-pressure pumps for tank top installation



Technical data

Flow, Q: max. 850 l/min
 Head, H: max. 120 bar
 Liquid temp.: 0 °C to + 80 °C
 Operat. pressure: max. 130 bar.

Applications

Pumping of coolants in machine tool applications, such as:

- Deep hole drilling
- Grinding
- Cutting.

Features and benefits

- High efficiency
- Wear resistant
- Compact design
- Low noise/pulsation.


Options

- Dry installation
- Mechanical shaft seal
- Variety of connections.



MTB

Single-stage centrifugal end-suction pumps with semi-open impeller



Technical data

Flow, Q: max. 90 m³/h
 Head, H: max. 47 m
 Liquid temp.: - 10 °C to + 90 °C
 Operat. pressure: max. 16 bar.

Applications

- Machine centres
- Coolant systems
- Filtration plants
- Grinding machines
- Parts cleaning systems
- Other industrial applications where semi-open impellers are needed.


Features and benefits

- Standard dimension according to EN and ISO standards
- Compact design
- Semi-open impeller/effective solid handling
- Standard EFF1/IE2 motor.



DME

Digital diaphragm dosing pumps



Technical data

Capacity, Q: max. 940 l/h
 Pressure, p: max. 18 bar
 Liquid temp.: max. + 50 °C.

Applications

- Water treatment
- Wastewater treatment
- Washing systems
- Swimming pools
- Process plants
- Filtration systems
- Reverse osmosis.


Features and benefits

- Capacity setting in ml/h or l/h
- Full diaphragm control
- Stroke-speed or stroke-frequency capacity control
- Control panel with display and one-touch buttons
- Front- or side-fitted control panel
- Manual/pulse control
- Control panel lock
- 4-20 mA control
- Pulse-/timer-based batch control
- Anti-cavitation function
- Easy calibration function
- Fieldbus communication module (option)
- Diaphragm leakage sensor.



DDI

Digital diaphragm dosing pumps



Technical data

Capacity, Q: max. 150 l/h
 Pressure, p: max. 16 bar
 Liquid temp.: max. + 50 °C.

Applications

- Water treatment
- Wastewater treatment
- Washing systems
- Swimming pools
- Process plants
- Paper production
- Food and beverage industry.


Features and benefits

- Powerful stepper motor (DDI 209) or brushless DC motor (DDI 222)
- Capacity setting in ml/h or l/h
- Smooth dosing through variable speed
- Reliable dosing of viscous liquids
- Front- or top-fitted control panel (DDI 222: side-fitted)
- Manual/pulse control
- 4-20 mA control
- Easy calibration and dosing of small liquid quantities or degassing media (DDI 209 with Plus³)
- Pioneering system for flow and pressure monitoring in the dosing head (control variant AF).
- PROFIBUS interface (control variant AP).



DMS

Compact diaphragm dosing pumps



Technical data

Capacity, Q: max. 12 l/h
 Pressure, p: max. 11 bar
 Liquid temp.: max. + 50 °C.

Applications

- Water treatment
- Wastewater treatment
- Washing systems
- Swimming pools
- Process plants.


Features and benefits

- Capacity setting in ml/h or l/h
- Full diaphragm control
- Stroke-frequency capacity control
- Control panel with display and one-touch buttons
- Front- or side-fitted control panel
- Manual control
- Pulse control (control variants A and AR)
- 4-20 mA control (control variants A and AR)
- Alarm relay output (control variant AR)
- Control panel lock
- Easy calibration function.



DMI

Robust diaphragm dosing pumps



Technical data

Capacity, Q: max. 18 l/h
 Pressure, p: max. 16 bar
 Liquid temp.: max. + 50 °C.

Applications

- Water treatment
- Wastewater treatment
- Washing systems
- Swimming pools
- Process plants.


Features and benefits

- Well-proven synchronous motor technology
- Silent operation, 45 dB(A)
- Flexible installation: built-in pump for OEM solutions
- Front- or top-fitted control panel
- Manual/pulse control
- Contact signal control with multiplier/divisor (control variant AR)
- Stroke-frequency control (control variant AR)
- Easy calibration and dosing of small liquid quantities or degassing media (dosing heads with Plus³ system)
- DMI is also available in a special version with injection unit and water meter (Unidos).



DMX

Motor-driven diaphragm dosing pumps



Technical data

Capacity, Q: max. 4000 l/h
(pump with two heads:
2 x 4000 l/h)

Pressure, p: max. 16 bar

Liquid temp.: max. + 50 °C.

Applications

- Drinking-water treatment
- Wastewater treatment (settlement/sludge treatment)
- Pulp/paper and textile industries.

Features and benefits

- Robust design
- Stroke-length adjustment.


Options

- Pulse control (control variant AR)
- Analog control (control variant AR)
- Level input from storage tank (control variant AR)
- Motor frequency control
- ATEX (DMX 226).



DMH

Oscillating positive displacement pumps with hydraulic diaphragm control



Technical data

Capacity, Q: max. 1500 l/h
(pump with two heads:
2 x 1500 l/h)

Pressure, p: max. 200 bar

Liquid temp.: max. + 90 °C.

Applications

- Oil refinery industry
- Heavy-duty applications
- Drinking-water treatment
- Wastewater treatment (settlement/sludge treatment)
- Pulp/paper and textile industries.

Features and benefits

- Designed for heavy-duty operation
- Stroke-length adjustment.

Options

- Servomotor for stroke-length adjustment
- Motor frequency control
- Available with API 675 approval
- Available with ATEX approval.



Accessories for dosing pumps and systems

Accessories

- Installation kits
- Tubing
- Pump connections
- Foot valves
- Suction lines
- Injection valves
- Pressure-relief valves
- Pressure-loading valves
- Multi-function valve
- Pulsation dampers
- Tanks
- Agitators and mixers
- Automatic venting valves
- Diaphragm leakage sensor
- Dosing monitor
- Flowmeter
- Water meter
- Cables and plugs.



Conex® DIA, DIS

Measurement and control systems for dosing instrumentation

Technical data

Amplifier parameters:

Conex® DIA-1: Cl₂, ClO₂, O₃, PAA, H₂O₂, pH or redox (ORP).

Conex® DIA-2: parameter 1: Cl₂, ClO₂, O₃ or H₂O₂.
parameter 2: pH.

Conex® DIA-2Q: parameter 1: Cl₂, ClO₂, O₃, PAA or H₂O₂.
parameter 2: pH or redox (ORP).

Conex® DIS-C: conductivity (inductive or conductive probes).

Conex® DIS-PR: pH or redox (ORP).

Conex® DIS-D: Cl₂, ClO₂ or O₃.

Applications

Instrumentation in disinfection processes:

- drinking water
- industrial water
- wastewater (only effluent)
- pool water.

Features and benefits

- User-friendly plain-text menu and operator prompting.
- Device calibration feature with plausibility check prevents errors occurring.
- Multilingual menu.
- Self-monitoring feature ensures excellent water quality at all times.
- Compensation for disturbance factors ensures precise measurement. As a result, chemical consumption is reduced to a minimum.
- Available as a preassembled system (amplifier and measuring cell) mounted on a plate and ready for connection.



DIP

Measurement and control systems for dosing instrumentation

Technical data

Amplifier parameters:

DIP: 1: Cl₂, ClO₂ or O₃.

2: pH.

3: redox (ORP).

Applications

Instrumentation in disinfection processes:

- drinking water
- industrial water
- wastewater (only effluent)
- pool water.

Features and benefits

- User-friendly plain-text menu and operator prompting.
- Device calibration feature with plausibility check prevents errors occurring.
- Multilingual menu.
- Self-monitoring feature ensures excellent water quality at all times.
- Compensation for disturbance factors ensures precise measurement. As a result, chemical consumption is reduced to a minimum.
- Available as a preassembled system (amplifier and measuring cell) mounted on a plate and ready for connection.



Conex® DIA-G, DIS-G

Gas warning systems

Technical data

Conex® DIA-G:

intelligent, membrane-covered gas sensors with integrated RAM for challenging measuring tasks. Sensor type, production number, manufacturing date and slope are stored in the memory. Gas warning system for Cl₂, ClO₂, O₃ (amperometric and potentiostatic probes) and NH₃, HCl (potentiostatic probes).

Conex® DIS-G:

rugged, low-budget gas sensors for dry rooms. Gas warning system for Cl₂, ClO₂, O₃ (amperometric probes).

Applications

- Gas dosing installations
- Monitoring of gas storage rooms.

Features and benefits

Capable of monitoring two different gas storage rooms or two different gases at the same time.

- Simultaneous measurement and display of two measuring parameters
- Optimum safety
- Very short response time
- Long and maintenance-free sensor service life
- Automatic sensor recognition and auto-calibration
- Separate sensor interface for Conex® DIA-G for one potentiostatic sensor
- Internal CAN-bus for the connection of potentiostatic sensors
- Optional audible and visual alarm device.



DIT-B

Photometer for measurement and calibration

Technical data

Measuring parameters:

- aluminium
- chlorine (free and total)
- chlorine dioxide
- cyanuric acid
- iron
- ozone
- pH.

Applications

The compact hand photometer DIT is dedicated for routine analysis in water treatment monitoring. It provides a photometric measuring system for measurement and calibration.

Features and benefits

- Up to 7 parameters can be measured. Precise and well-reproducible measuring values
- Long-term stable even after several measurements.
- Multi-lingual plain-text operator prompting.
- Patented, two-beam principle with carrier frequency technology compensates for the effects of turbidity or external light.



Vaccuperm

Full-vacuum chlorine gas dosing systems for disinfection

Technical data

Model VGB: max. 2 kg/h
 Model VGA: max. 10 kg/h
 Model VGS: max. 200 kg/h.

Applications

- Water treatment (municipal waterworks)
- Treatment of industrial wastewater
- Water treatment in public swimming baths.

Features and benefits

- Reliable full-vacuum systems
- Approved disinfection method complying with WHO drinking water guidelines
- Systems for direct installation on chlorine gas cylinders or drums or for installation in header lines
- Fully automated systems (wall- or floor-mounted)
- Precise regulation and dosing of gaseous chlorine
- Simple handling and user-friendly design
- Complete range of accessories available on request: injectors, automatic changeover units, evaporators, liquid traps.



Selcoperm

Electro-chlorination systems for disinfection

Technical data

Capacity: max. 2000 g/h (higher capacities on request)
 Water consumption: 125-150 l per kg of prepared chlorine
 Salt consumption: approx. 3 to 3.5 kg per kg of prepared chlorine
 Power consumption: approx. 4.5 - 5.5 kWh per kg of prepared chlorine.

Applications

- Water treatment in municipal waterworks and with independent water suppliers
- Treatment of industrial wastewater
- Treatment of industrial process water and water in cooling towers
- Water treatment in public swimming baths, hotel pools and therapy pools.

Features and benefits

- Turn-key systems
- Only water, common salt and electricity are needed for the Selcoperm electrolysis method
- Fresh disinfectant solution (hypochlorite) is always available
- Simple handling and user-friendly design
- Approved disinfection method complying with WHO drinking water guidelines and many local regulations
- Low maintenance and long service life due to robust components.



Oxiperm

Chlorine dioxide preparation and dosing systems for disinfection

Technical data

Model OCD-164:

- Hypochloric acid/sodium chlorite method with diluted chemicals:
 - HCl: 9 % by weight
 - NaClO₂: 7.5 % by weight
- Capacity: 30 - 2000 g/h.

Model OCC-164:

- Hypochloric acid/sodium chlorite method with concentrated chemicals:
 - HCl: 33 % by weight
 - NaClO₂: 24.5 % by weight
- Capacity: max. 10 kg/h.

Model OCG-166:

- Chlorine gas/sodium chlorite method:
 - NaClO₂: 24.5 % by weight
- Capacity: max. 10 kg/h.

Applications

- Water treatment in municipal waterworks, hotels, hospitals, retirement homes, sports facilities
- Prophylaxis of Legionella
- Treatment of industrial process water, washing water and cooling circuit water
- Disinfection in bottle wash systems, rinsers, CIP systems
- Disinfection in dairies (condenser vapour, pasteurization).

Features and benefits

- On-site preparation of chlorine dioxide
- Ergonomic design
- Optimum process monitoring
- Innovative dosing and calibration technology
- Complete chemical reaction within a minimum of time
- Low consumption of chemicals
- Easy maintenance.



Oxiperm Pro

Chlorine dioxide preparation and dosing systems

Technical data

Model OCD-162:

- Capacity: max. 60 g/h
- Concentration of chemicals:
 - HCl: 9 % by weight
 - NaClO₂: 7.5 % by weight.

Applications

- Water treatment in municipal waterworks, hotels, hospitals, retirement homes, sports facilities, shower facilities
- Combating and prophylaxis of Legionella
- Treatment of industrial process water, washing water and cooling circuit water
- Treatment of brewing water
- Disinfection in bottle wash systems, rinsers, CIP systems
- Disinfection in dairies (condenser vapour, pasteurisation).

Features and benefits

- Compact system to be installed on confined spaces.
- Ergonomic design. Operation and maintenance are performed from the front.
- On-site preparation of the disinfectant chlorine dioxide.
- Optional with chlorine dioxide control
- Simple assembly and start-up. The system can be connected and put into operation without interrupting the building's water supply.
- Complete chemical reaction within a minimum of time.
- Low operating costs and low consumption of chemicals.



Polydos, KD

Dry material preparation systems

Technical data

- Customised complete installations
- Preparation capacity: max. 11,000 l/h
- Viscosity of prepared solution: max. 2500 mPa s.

Applications

Preparation of poly-electrolyte, lime milk, aluminium sulphate, etc. for water and wastewater treatment.

Features and benefits

- Model Polydos: two- or three-chamber installations for preparation and dosing of liquid organic flocculants out of dry or liquid materials.
- Model KD: single-chamber installation for preparation and dosing of solutions (e.g. lime milk) out of dry materials.
- Includes dry material feeding system.
- Fully automatic systems with PLC control.
- Graphic display with multilingual user interface.
- Preparation and ripening chamber with electric agitators (optional for the dosing chamber).
- Ultrasonic sensor for continuous level control.
- Water apparatus with shut-off valve, solenoid valve (24 VDC), pressure reducing valve and contact water meter.



HydroProtect

Compact disinfection/booster systems

Technical data

Models: HydroProtect EcoLine
HydroProtect ProLine
Flow rate: 12 to 50 m³/h
ClO₂ capacity: 5 to 10 g/h
Pressure: max. 10 bar.

Applications

- Water treatment in the food and beverage industry
- Fending off beer spoilage bacteria.

Features and benefits

- Highly effective against Legionella.
- Highly effective even against microorganisms that spoil beer.
- No build-up of detectable organic chlorine compounds, i.e. chlorine dioxide is the optimum disinfectant for the food or beverage industry.
- The integrated measuring amplifier with measuring cell in the standard design makes it easy to continuously monitor the chlorine dioxide content in the process water network.
- Integrated speed-controlled booster station increases the pressure of the disinfected water to the required value and feeds it into the system.
- The speed control ensures efficient constant pressure and protects the system, making pressure surges a thing of the past.
- The integrated EFF1/IE2 energy-efficient motor minimises energy costs.



DTS

Dosing tank stations

Technical data

A DTS includes a tank and some installation material, and is prepared for one of the dosing pumps: DDI, DME, DMI, DMS, DMX up to 60 l/h.

Components available for DTS:

- Mounting material for the dosing pumps: DDI, DME, DMI, DMS, DMX up to 60 l/h
- Dosing tank up to 1000 l
- Electric agitator or hand mixer
- Collecting tray
- Suction line, optionally with flow switch for empty/pre-empty indication
- Multi-function valve
- Injection unit
- Dosing line
- Drain valve
- Tank inlet valve.

Dosing tank stations are preassembled from the factory. The dosing pump has to be ordered separately.

Applications

- Water and wastewater treatment
- Washing systems
- Swimming pools
- Process plants
- Paper production
- Food and beverage industry.


Features and benefits

- Flexible systems for a wide range of applications and dosing tasks
- Suitable for a lot of chemical media due to high quality materials
- Minimised installation and commissioning effort.



CHIU

Multistage centrifugal pumps



Technical data

Flow, Q: max. 7 m³/h
Head, H: max. 39 m
Liquid temp.: -20 °C to +120 °C
Operat. pressure: max. 10 bar.

Applications

- Water treatment systems
- Industrial washing and dishwashing machines
- Pressure boosting of process water
- Heating and cooling in industrial processes
- Air-conditioning systems
- Airwashing, moisturisation, humidification (softened water)
- Water supply and pressure boosting (drinking water, also slightly chlorinated).


Features and benefits

- Compact design
- Wide range
- Suitable for slightly aggressive liquids
- Low noise
- Leakage-free.



CM, CME

Multistage centrifugal pumps



Technical data

Flow, Q: max. 36 m³/h
 Head, H: max. 130 m
 Liquid temp.: - 30 °C to + 120 °C
 Operat. pressure: max. 16 bar.

Applications

- Washing and cleaning
- Water treatment
- Temperature control
- Pressure boosting.

Features and benefits

- Compact design
- Modular design
- Low noise level.


Options

- Customised products
- Built-in or stand-alone
- Variable frequency drive.



CMBE

Frequency controlled booster systems



Technical data

Flow, Q: max. 7.6 m³/h
 Head, H: max. 50 m
 Liquid temp.: 0 °C to 60 °C
 Operat. pressure: max. 6 bar.

Applications

- Single-family houses
- Two-family houses
- Cluster homes
- Blocks of flats
- Schools
- Small hotels/guest houses
- Small office buildings.


Features and benefits

- Constant pressure via integrated speed control
- Compact
- Robust, stainless steel
- Easy installation
- Dry-running protection
- Low noise, 55 dB(A)



AC

Single-stage centrifugal pumps



Technical data

Flow, Q: max. 45 m³/h
 Head, H: max. 23 m
 Liquid temp.: - 10 °C to + 55 °C
 Operat. pressure: max. 6.5 bar.

Applications

- Liquid transfer
- Temperature control.


Features and benefits

- Compact design
- High reliability
- Low noise level.



CR, CRI, CRN

Multistage centrifugal pumps



Technical data

Flow, Q: max. 180 m³/h
 Head, H: max. 330 m
 Liquid temp.: - 40 °C to + 180 °C
 Operat. pressure: max. 33 bar.

Applications

- Washing systems
- Cooling and air-conditioning systems
- Water supply systems
- Water treatment systems
- Fire fighting systems
- Industrial plants
- Boiler feed systems.

Features and benefits

- Reliability
- High efficiency
- Service-friendly
- Space-saving
- Suitable for slightly aggressive liquids.


Options

- Dry-running protection and motor protection via LiqTec.



CRE, CRIE, CRNE

Multistage centrifugal pumps - electronically controlled



Technical data

Flow, Q: max. 180 m³/h
 Head, H: max. 250 m
 Liquid temp.: - 40 °C to + 180 °C
 Operat. pressure: max. 33 bar.

Applications

- Washing systems
- Cooling and air-conditioning systems
- Water supply systems
- Water treatment systems
- Fire fighting systems
- Industrial plants
- Boiler feed systems.

Features and benefits

- Wide range
- Reliability
- In-line design
- High efficiency
- Service-friendly
- Space-saving
- Many control facilities.

Options

- Wireless remote control, R100.



CR Monitor

Monitoring of pump efficiency, cavitation and performance

Technical data

- Pump types supported: CR, CRI, CRN and CRN MAGdrive
- Motor range: 1.1 to 75 kW, EFF1/IE2
- Available for pumps with standard MG/Siemens motors, MG/Siemens motors supplied from a Grundfos CUE frequency converter and MGE motors with integrated frequency converter
- Based on well-known components from Control/Hydro MPC and the LiqTec sensor
- Enclosure class: IP54
- Voltage supply: 3 x 400 VAC.

Applications

- Pumps in demanding applications where zero downtime is required.
- Pumps exposed to extreme wear or clogging due to materials in the pumped liquid.
- Pumps in processes where continuous monitoring and control are essential.

Features and benefits

- Detects if the pump efficiency is reduced.
- Detects if the pump is about to cavitate.
- Detects if the pump is running outside its normal operating range.
- Enables planning of pump maintenance in order to prevent unplanned downtime.


Options

- 24/7 monitoring of operation and protection of equipment
- Bus communication to SCADA system or Web-link
- Data collection, monitoring and setting through local PC or via internet.



CR, CRN high pressure

Multistage centrifugal pumps



Technical data

Flow, Q: max. 180 m³/h
 Head, H: max. 480 m
 Liquid temp.: - 30 °C to + 120 °C
 Operat. pressure: max. 50 bar.

Applications

- Washing systems
- Water treatment systems
- Industrial plants
- Boiler feed systems.

Features and benefits

- Reliability
- High pressures
- Service-friendly
- Space-saving
- Suitable for slightly aggressive liquids
- Single-pump solution enabling high pressure.


Options

- Dry-running protection and motor protection via LiqTec.



CRT

Multistage centrifugal pumps



Technical data

Flow, Q: max. 22 m³/h
 Head, H: max. 250 m
 Liquid temp.: - 20 °C to + 120 °C
 Operat. pressure: max. 25 bar.

Applications

- Process water systems
- Washing in cleaning systems
- Seawater systems
- Pumping of acids and alkalis
- Ultra-filtration systems
- Reverse osmosis systems
- Swimming baths.

Features and benefits

- High corrosion resistance
- Reliability
- High efficiency
- Service-friendly
- Space-saving.


Options

- Dry-running protection and motor protection via LiqTec.



CR DW

Ejector pumps



Technical data

Operat. pressure: max. 16 bar
 Ambient temp.: max. 40 °C
 Liquid temp.: max. 40 °C.

Applications

- Minor water-supply systems, for instance irrigation in agriculture and horticulture, liquid transfer on farms with own well and in weekend cottages.

Features and benefits

- Four sizes and two material versions. One with all wetted parts made of stainless steel.
- Suitable for wells down to 90 m.
- Service-friendly.
- Pump head and base made of electro-plated cast iron.


Options

- Hose kit (for simple change from CPE/CPES to CR DW).



Euro-HYGIA®

Single-stage, end-suction sanitary pumps



Technical data

Flow, Q: max. 108 m³/h
 Head, H: max. 70 m
 Operat. temp.: + 95 °C
 (+ 150 °C on request)
 Operat. pressure: max. 16 bar.

Applications

- Breweries and dairies
- Pure water systems (WFI) soft drinks
- Process pumping in pharmaceutical/ cosmetics industry
- CIP (Cleaning-In-Place) systems
- Biofuel application.

Features and benefits

- Unique hygienic design (QHD and EHEDG)
- CIP- and SIP-capable (DIN EN 12462)
- Customised solutions
- Materials: AISI 316L (DIN EN 1.4404/ 1.4435)
- Gentle liquid handling.


Options

- Electronically speed controlled versions
- ATEX-certified pumps
- Wide range of impeller designs
- Various surface standards.



F&B-HYGIA®

Single-stage, end-suction sanitary pumps



Technical data

Flow, Q: max. 108 m³/h
 Head, H: max. 70 m
 Operat. temp.: + 95 °C
 (+ 150 °C on request)
 Operat. pressure: max. 16 bar.

Applications

- Breweries and dairies
- Soft-drink mixing
- Syrup and sugar solutions
- Frying oil and blood processing
- Fruit-drink and yeast pumping
- Food processing.

Features and benefits

- Unique hygienic design (QHD and EHEDG)
- CIP- and SIP-capable (DIN EN 12462)
- Materials: AISI 316 (DIN EN 1.4404)
- Compact design.


Options

- Electronically speed-controlled versions
- Several mechanical shaft seal types
- Wide range of pipe connections
- With or without motor shroud.



Contra

Single- and multistage, end-suction sanitary pumps



Technical data

Flow, Q: max. 55 m³/h
 Head, H: max. 160 m
 Operat. temp.: + 95 °C
 (+ 150 °C on request)
 Operat. pressure: max. 25 bar.

Applications

- Breweries and dairies
- Food processing plants
- Pure water systems (WFI)
- CIP feeding systems
- Biofuel applications
- Process pumping in pharmaceutical/ cosmetic industry.

Features and benefits

- Unique hygienic design (QHD and EHEDG)
- CIP- and SIP-capable (DIN EN 12462)
- High efficiency
- Materials: AISI 316L (DIN EN 1.4404/ 1.4435).


Options

- Customised solutions
- Electronically speed-controlled versions
- ATEX-certified pumps
- Fully drainable versions
- With or without motor shroud.



Durietta

Single- and multistage, end-suction sanitary pumps



Technical data

Flow, Q: max. 6 m³/h
 Head, H: max. 75 m
 Operat. temp.: + 90 °C
 Operat. pressure: max. 8 bar.

Applications

- Microbreweries and dairies
- Bottling systems
- Purification systems
- Drinking water systems
- Industrial applications.

Features and benefits

- Unique hygienic design
- CIP-capable (DIN EN 12462)
- Materials: AISI 316 (DIN EN 1.4404)
- Compact design.


Options

- Wide range of pipe connections
- Various shaft seals
- With or without motor shroud.



SIPLA

Single-stage, self-priming side-channel sanitary pumps



Technical data

Flow, Q: max. 85 m³/h
 Head, H: max. 56 m
 Operat. temp.: + 95 °C
 (+ 140 °C SIP)
 Operat. pressure: max. 10 bar.

Applications

- CIP return pumping
- Breweries and dairies
- Soft drinks
- Food processing systems.

Features and benefits

- High air-content handling
- Efficient priming
- Robust, service-friendly.


Options

- Electronically speed controlled versions
- ATEX-certified pumps
- Various shaft seals
- Various connections.



MAXA and MAXANA

End-suction process pumps



Technical data

Flow, Q: up to max. 820 m³/h
 Head, H: up to max. 97 m
 Operat. temp.: + 95 °C
 (+ 150 °C on request)
 Operat. pressure: max. 10 bar.

Applications

- Gentle pumping of mash and wort for beer filtration (hot side)
- Dairies
- Water treatment plants
- Chemical and environmental handling systems
- Liquids with high content of solid particles
- Biofuel applications
- Chemical industries.

Features and benefits

- Optimised hydraulics
- Gentle product handling
- Materials: AISI 316 (DIN EN 1.4404)
- Service-friendly.


Options

- Electronically speed controlled versions
- ATEX-certified pumps
- Electro-polished versions
- Various shaft seals.



NOVALobe

Rotary-lobe, positive displacement pumps



Technical data

Displacement: 0.06 to 1.29 l/rev.
 Max. diff. pressure: 16 bar
 Viscosity: max. 1,000,000 cP
 Operat. temp.: + 95 °C
 Operat. pressure: up to 16 bar.

Applications

- Pumping of high-viscosity products, e.g. yoghurt, mayonnaise and shampoo
- Breweries and dairies
- Pumping of products requiring gentle handling, e.g. cheese curds, yeast and vaccine/fermentation broth.

Features and benefits

- Unique hygienic design (EHEDG and 3A)
- Robust construction
- Service-friendly
- CIP- and SIP-capable (DIN EN 12462)
- Materials: AISI 316 (DIN EN 1.4404/1.4435).


Options

- Integrated pressure-relief valve
- Wide range of shaft seals (elastomer)
- Thermal jackets
- Aseptic front cover.
- Various connections
- Vertical or horizontal connections.



Hydro MPC, Hydro Multi-E/-S Hydro Solo-E/-S

Complete pressure booster systems



Technical data

Flow, Q: max. 1080 m³/h
 Head, H: max. 160 m
 Liquid temp.: 0 °C to + 70 °C
 Operat. pressure: max. 16 bar.

Applications

- Water supply systems
- Irrigation systems
- Water treatment systems
- Industrial plants.

Features and benefits

- Easy installation and start-up
- User-friendly setting and monitoring
- Application-optimised software
- Modular solution with possibility of expansion
- Data communication via Ethernet, LON, Profibus etc.
- Reliability
- High efficiency.



BMP

Piston pumps for liquid transfer under high pressure

Technical data

Flow, Q: max. 10.2 m³/h
 Head, H: max. 1630 m
 Liquid temp.: 3 °C to + 50 °C
 Operat. pressure: max. 160 bar.

Applications

- Cleaning/washing
- Injecting
- Misting
- Processing
- Desalination of brackish water and seawater.


Features and benefits

- High efficiency
- Small, light-weight pump
- Generates insignificant pulsations in the discharge line
- No preventive maintenance required
- Long service life
- Few wear parts
- Wide speed control range
- Extreme recirculation capability without overheating (up to 90 %)
- Lubricated by the pumped liquid
- Compact design.



BM, BMB

4", 6", 8" booster modules



Technical data

Flow, Q: max. 260 m³/h
 Head, H: max. 430 m
 Liquid temp.: 0 °C to + 40 °C
 Operat. pressure: max. 80 bar.

Applications

- Reverse osmosis systems
- Water supply systems
- Water treatment systems
- Industrial plants.


Features and benefits

- Various material versions
- Low-noise
- Simple installation
- Modular design
- Compact design
- Leakage-free.
- In-line



BME, BMET

High-pressure booster systems



Technical data

Flow, Q: max. 95 m³/h
 Head, H: max. 700 m
 Liquid temp.: 0 °C to + 40 °C
 Operat. pressure: max. 70 bar.

Applications

- Reverse osmosis systems
- Water supply systems
- Water treatment systems
- Industrial plants.


Features and benefits

- High-pressure/high-flow
- Low-energy
- Simple installation
- Compact design.



BMEX

Booster systems for energy recovery in seawater reverse osmosis (SWRO) systems



Technical data

Permeate per day: 500 to 2500 m³
 Head, H: max. 810 m
 Ambient temp.: + 40 °C
 Operat. pressure: max. 80 bar.

Applications

- Desalination of brackish water and seawater.


Features and benefits

- Energy recovery up to 60 %, compared to conventional systems, resulting in short payback period
- Corrosion- and wear-resistant internal ceramic components
- Couplings for easy installation
- High-grade stainless steel frame and manifold
- Large flow rates and high heads
- Motor and bearings are standard components
- Maintenance-free shaft seal
- V-belt drive with high efficiency
- Easy to dismantle for service.



SQ, SQE

3" submersible pumps



Technical data

Flow, Q: max. 9 m³/h
 Head, H: max. 210 m
 Liquid temp.: 0 °C to + 40 °C
 Installation depth: max. 150 m.

Applications

- Domestic water supply systems
- Groundwater supply to waterworks
- Irrigation in horticulture and agriculture
- Groundwater lowering
- Industrial applications.

Features and benefits

- Integrated dry-running protection
- Soft start
- Over- and undervoltage protection
- High efficiency.


Options

- SQE can be protected, monitored and controlled by the CU 300 and CU 301.



SP A, SP, SP-G

4", 6", 8", 10", 12" submersible pumps



Technical data

Flow, Q: max. 470 m³/h
 Head, H: max. 670 m
 Liquid temp.: 0 °C to + 60 °C
 Installation depth: max. 600 m.

Applications

- Groundwater supply to waterworks
- Irrigation in horticulture and agriculture
- Groundwater lowering
- Pressure boosting
- Industrial applications.

Features and benefits

- High efficiency.
- Long service life as all components are of stainless steel.
- Motor protection via CUE or MP 204.


Options

- Data can be monitored and controlled via CUE, MP 204/R100.



SQE-NE, SP-NE

Environmental pumps



Technical data

Flow, Q: max. 22 m³/h
 Head, H: max. 215 m
 Liquid temp.: 0 °C to + 40 °C
 Installation depth: max. 600 m.

Applications

- Pumping contaminated groundwater
- Sampling
- Remedial pumping.


Features and benefits

- SQE-NE: as SQE
- SP-NE: as SP.



MP 1

Environmental pumps



Technical data

Flow, Q: max. 2.4 m³/h
 Head, H: max. 95 m
 Liquid temp.: 0 °C to + 35 °C.

Applications

- Sampling.


Features and benefits

- Compact design
- Fit into 50 mm boreholes.



SQFlex

Renewable-energy based water supply systems



Technical data

Flow, Q: max. 90 m³/day
 Head, H: max. 200 m
 Liquid temp.: 0 °C to + 40 °C
 Voltage supply: 30-300 VDC or 1 x 90-240 V, 50/60 Hz
 Installation depth: max. 150 m.

Applications

- Villages, schools, hospitals, single-family houses
- Farms and greenhouses
- Game parks and game farms
- Conservation areas.


Features and benefits

- Energy supply from solar modules, wind turbine, generator or batteries
- Simple installation
- Reliable water supply
- Virtually no maintenance
- Expansion possibilities
- Cost-efficient pumping
- Dry-running protection.



JP

Self-priming jet pumps



Technical data

Flow, Q: max. 6.5 m³/h
 Head, H: max. 48 m
 Liquid temp.: 0 °C to + 55 °C
 Operat. pressure: max. 6 bar.

Applications

- Households
- Gardens
- Hobby activities
- Agriculture
- Horticulture
- Small industries.

Features and benefits

- Self-priming
- Stable operation even in case of air pockets in the liquid.


Options

- Automatic start/stop when equipped with Presscontrol
- Booster systems for small-scale water supply.



MQ

Multistage centrifugal self-priming pumps



Technical data

Flow, Q: max. 5 m³/h
 Head, H: max. 48 m
 Liquid temp.: 0 °C to + 35 °C
 Operat. pressure: max. 7.5 bar.

Applications

- Single- or two-family houses
- Weekend cottages
- Farms
- Greenhouses.


Features and benefits

- All-in-one pressure booster unit
- Easy to install
- Easy to operate
- Self-priming
- Dry-running protection with automatic reset
- Low-noise
- Maintenance-free.



RMQ

Units for monitoring and control of rainwater collection and utilisation systems



Technical data

Flow, Q: max. 5 m³/h
 Head, H: max. 48 m
 Liquid temp.: 0 °C to + 35 °C
 Operat. pressure: max. 7.5 bar.

Applications

- Single- or two-family houses
- Weekend cottages
- Farms
- Gardens and greenhouses.

Features and benefits

- Automatic changeover between rainwater tank and integrated mains water tank.
- Manual changeover between rainwater tank and integrated mains water tank
- Acoustic/visual alarm in case of overflow in integrated mains water tank.


Options

- Control of additional booster pump
- Backflow monitoring equipment.



CHV

Multistage centrifugal pumps



Technical data

Flow, Q: max. 8 m³/h
 Head, H: max. 93 m
 Liquid temp.: 0 °C to + 90 °C
 Operat. pressure: max. 10 bar.

Applications

- Pressure booster systems
- Domestic water supply systems
- Cooling systems
- Air-conditioning systems
- Horticultural irrigation systems
- Small industrial water supply systems.


Features and benefits

- Compact design
- Robust design
- Low-noise
- Space-saving.



CHV booster

Vertical pressure booster systems



Technical data

Flow, Q: max. 16 m³/h
 Head, H: max. 93 m
 Liquid temp.: 0 °C to + 40 °C
 Operat. pressure: max. 10 bar.

Applications

- Small waterworks
- Small blocks of flats
- Hotels
- Stores
- Light industry
- Hospitals
- Schools
- Large houses.

Features and benefits

- One- or two-pump system
- User-friendly controllers
- Reliability
- High efficiency
- Service-friendly.

Options

- Overpressure protection
- Dry-running protection.



Conlift

Pumps for removal of condensate water

Technical data

Flow: max. 630 l/h
 Head H: max. 5.3 m
 Liquid temp.: max. 35 °C,
 short periods 80 °C
 pH: min. 2.7
 Container volume: 2.6 l
 Effective volume: 0.85 l.

Applications

- Boilers up to 200 kW
- Air-conditioning systems
- Cooling and refrigeration systems
- air dehumidifiers
- Evaporators.

Features and benefits

- Built-in on/off control via two pressure switch ensures high security
- Built-in alarm and potential-free contact
- Angular mounting brackets to counteract buoyancy
- LGA approval
- Modern design
- Easy to clean.



Conlift L

Pumps for removal of condensate water

Technical data

Flow: max. 342 l/h
 Head H: max. 4.5 m
 Liquid temp.: max. 35 °C,
 short periods 80 °C
 pH: min. 2.5
 Container volume: 2.6 l
 Effective volume: 0.5 l.

Applications

- Boilers up to 100 kW
- Air-conditioning systems
- Cooling and refrigeration systems
- Air dehumidifiers
- Evaporators.


Features and benefits

- Built-in on/off control via a microswitch
- Built-in safety switch/potential-free contact to switch off condensate source
- VDE and GOST approvals
- Pipe adapter for inlet and discharge included
- Easy to clean
- Maintenance-free motor with thermal protection
- All installation material and discharge hose
- Reliable and silent.



Unilift CC, KP, AP, AP-B

Submersible drainage and effluent pumps



Technical data

Flow, Q: max. 35 m³/h
 Head, H: max. 18 m
 Liquid temp.: 0 °C to + 55 °C
 Installation depth: max. 25 m.

Applications

- Drainage of flooded cellars
- Pumping of household wastewater
- Groundwater lowering
- Emptying of swimming pools and excavations
- Drainage of drain wells
- Emptying of tanks and reservoirs.

Features and benefits

- Simple installation
- Service- and maintenance-free.


Options

- Unilift CC is suitable for low suction.
- Unilift AP35/50 and AP35B/50B have vortex impeller.
- Unilift AP35B and AP50B have auto-coupling and horizontal outlet.



DW

Contractor pumps



Technical data

Flow, Q: max. 300 m³/h
 Head, H: max. 100 m
 Liquid temp.: 0 °C to + 40 °C.

Applications

- Tunnels
- Mines
- Quarries
- Gravel pits
- Fish ponds
- Building sites.


Features and benefits

- Extremely hard-wearing due to specially selected materials
- Simple installation
- Service-friendly.



DWK

High-pressure submersible pumps



Technical data

Flow, Q: max. 432 m³/h
 Head, H: max. 102 m
 Liquid temp.: 0 °C to + 40 °C
 Installation depth: max. 25 m.

Applications

- Dewatering of
- construction sites
 - excavation sites
 - tunnels.
- Draining of
- underground building pits
 - industrial pits
 - storm water pits.


Features and benefits

- Durability
- High efficiency
- Compact design
- High-pressure capabilities.



DPK

3" submersible pumps



Technical data


Flow, Q: max. 155 m³/h
 Head, H: max. 51 m
 Liquid temp.: 0 °C to + 40 °C
 Installation depth: max. 25 m.

Applications

Draining of
 - underground building pits
 - industrial pits
 - storm water pits.


Features and benefits

- High-pressure capabilities
- Installation flexibility
- Easy to service and maintain.

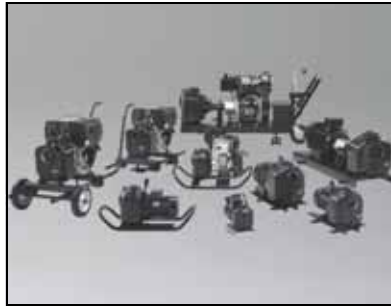

Pomona

Portable, self-priming pumps for temporary or permanent installation



Technical data

Flow, Q: max. 130 m³/h
 Head, H: max. 31 m
 Liquid temp.: 0 °C to + 100 °C
 Operat. pressure: max. 6 bar.

Applications

- Dewatering of construction sites
- Groundwater water level control
- Irrigation in gardens and parks
- Water supply in horticulture and agriculture
- Draining of yachts and motor boats
- Industrial applications.

Features and benefits

- Self-priming
- Motor variation (electrical or internal combustion engines)
- Wear-resistant
- Versatile.


Options

- Pomona can be supplied as bare-shaft pump as well as with the motor on a trolley, carrying frame or base plate.



DP, EF, SL1 and SLV

Drainage, effluent and sewage pumps



Technical data

Flow, Q: max. 19.5 l/s
 (70 m³/h)
 Head, H: max. 25 m
 Liquid temp.: 0 °C to + 40 °C
 Discharge diameter: Rp 2 to DN 65.

Applications

- Drainage
- Effluent
- Wastewater
- Process water
- Domestic sewage.

Features and benefits

- Cable plug connection
- Unique clamp connection
- Single-channel and vortex impellers
- Solids passage up to 65 mm
- Unique cartridge shaft seal
- Modular design
- Minimum downtime.


Options

- Control and protection systems
- Motor operation control.



SEG

Grinder pumps



Technical data

Flow, Q: max. 5 l/s
 Head, H: max. 47 m
 Liquid temp.: 0 °C to + 40 °C.

Applications

- Pumping of wastewater with toilet waste through pipes of 40 mm in diameter and upwards.

Features and benefits

- Service-friendly
- Installation on foot or auto-coupling
- Continuous operation with fully submerged pump
- Built-in motor protection
- SmartTrim
- Improved grinder system
- Totally sealed cable plug.


Options

- Wide range of accessories
- Monitoring and control of one or several pumps.



S pumps

Supervortex pumps, single- or multichannel impeller pumps



Technical data

Flow, Q: max. 2500 l/s
 Head, H: max. 116 m
 Liquid temp.: 0 °C to + 40 °C
 Discharge diameter: DN 80 to DN 800
 Particle size: max. Ø 145.

Applications

- Transfer of wastewater
- Transfer of raw water
- Pumping of sludge-containing water
- Pumping of industrial effluent.

Features and benefits

- Wide range
- SmartTrim
- Operation with/without cooling jacket
- Submerged or dry installation
- Different types of impellers
- Built-in motor protection.

Options

- Control and protection systems
- External cooling water
- External seal flush system
- Sensors for monitoring of pump conditions
- Various casted stainless steel executions available.



PUST

Small pumping stations

Technical data

Ø 400, Ø 600, Ø 800 and Ø 1000
 Depth from 0.5 - 3.0 m
 Outlet pipe size DN 40, DN 50 and DN 65
 Liquid temp.: max. 40 °C
 Made of PEHD, pipes and valves made of PE or stainless steel.

Applications

- Drainage
- Effluent/rainwater/surface water
- Wastewater.

Features and benefits

- Modular flexibility
- Corrosion-free materials
- Increased sump volume prevents push-up
- Easy installation
- Sturdy design
- Inlet holes drilled on site
- Design of sump limits sludge and odour problems.

Options

- Pumps
- Controls and communication
- Valve chambers
- Launcher for cleaning pig
- Flowmeter
- Inlet seals
- Drills for inlet seals
- Frost protection
- Ventilation package
- Covers for heavy traffic load.



AMD, AMG, AFG

Mixers and flowmakers

Technical data

| | |
|--------------------------|--------------------------------|
| Liquid temp.: | + 5 °C to + 40 °C |
| pH value: | 4 to 10 |
| Axial thrust: | 160 to 6632 N |
| Max. dynamic viscosity: | 500 mPas |
| Max. density: | 1060 kg/m ³ |
| Max. installation depth: | 20 m |
| Propeller diameter: | 180 to 2600 mm |
| Rotation speed: | 22 to 1400 min ⁻¹ . |

Applications

- Municipal wastewater treatment systems
- Industrial processes
- Sludge treatment systems
- Agriculture
- Biogas plant.


Features and benefits

- Wide range of flexible installation accessories
- Easy to maintain and service without use of special tools
- Electronic leak sensor in gearbox/shaft seal housing
- Shaft seal protected against abrasive materials
- Self-cleaning stainless steel or polyamide propellers.



SRP

Submersible recirculation pumps



Technical data

| | |
|----------------------|---|
| Flow, Q: | max. 1430 l/s (5130 m ³ /h) |
| Head, H: | max. 2.1 m |
| Liquid temp.: | 5 °C to + 40 °C |
| Discharge pipe dia.: | DN 300, DN 500 and DN 800. |

Applications

- Recirculation of sludge in sewage treatment plants
- Pumping of stormwater.

Features and benefits

- High efficiency stainless steel impeller
- Totally submerged installations
- Built-in motor protection.


Options

- Control and protection systems.



SEN

Submersible stainless steel pumps



Technical data

| | |
|---------------------|---|
| Flow, Q: | max. 215 l/s (774 m ³ /h) |
| Head, H: | max. 50 m |
| Liquid temp.: | 0 °C to + 40 °C |
| Discharge diameter: | DN 80 to DN 250. |

Applications

- Transfer of wastewater and raw water
- Pumping of highly aggressive liquids
- Pulp and paper industries.

Features and benefits

- SmartTrim
- Operation with/without cooling jacket
- Submerged or dry installation
- Different types of impellers
- Built-in motor protection
- Stainless steel versions
- Liquids with a pH value of 2 to 14.


Options

- Control and protection systems
- External cooling water
- External seal flush system
- Sensors for pump monitoring.



SE

Heavy duty submersible pumps



Technical data

Flow, Q: max. 88 l/s
(315 m³/h)
Head, H: max. 45 m
Liquid temp.: 0 °C to + 40 °C
Discharge diameter: DN 65 to DN 150.

Applications

- Pumping of wastewater
- Pumping of process water
- Pumping of unscreened raw sewage.

Features and benefits

- Cable plug connection
- Unique clamp assembly system
- Single-channel and vortex impellers
- Solids passage up to 100 mm
- Minimum downtime
- Low operating costs
- Liquidless motor cooling
- Unique cartridge shaft seal.

Options

- Control and protection systems
- Motor operation control
- Sensors for pump monitoring
- Various casted stainless steel executions available.



CU100

Small pump control units

Technical data

Voltage supply: 1 x 230, 3 x 230 and 3 x 400 V, 50 Hz.

Applications

The control unit CU 100 is designed for the starting, operation and protection of small pumps.

The control unit is suitable for the following operating currents:

- Single-phase: up to 9 A.
- Three-phase: up to 5 A.

Features and benefits

- Control of one pump
- Start/stop by means of a float switch or manual start/stop.
- Several variants for single- and three-phase pumps
- Single-phase control units are supplied with capacitors and with or without float switch.
- Three-phase control units are supplied with a float switch
- IP54 cabinet with screwed metric cable entries.



LC, LCD 107, 108 and 110

Pump controllers with pneumatic signal, float switch or electrodes

Technical data

Voltage supply: 1 x 230, 3 x 230 and 3 x 400 V, 50/60 Hz.

Applications

- Pumping stations
- Filling/emptying of tanks.

Features and benefits

- Control of one (LC) or two pumps (LCD)
- Automatic alternating operation (LCD)
- Automatic test run preventing shaft seals from seizing up during long periods of inactivity
- Water hammer protection
- Starting delay after power failure
- Stop delays
- Automatic alarm reset (if required)
- Automatic restart (if required)
- Liquid level indication
- High-level alarm
- Motor overload protection relay
- Protection against motor overheating via input from PTC resistor/thermal switch.

Optional

- SMS modem with built-in hour and start counter (information on mobile phone)
- Hour counter
- Start counter
- Signal lamp
- Acoustic signal
- External mains switch.



Dedicated Controls

Pump controllers

Technical data

Voltage supply: 1 x 230, 3 x 230 and
3 x 400 V, 50/60 Hz.

Applications

- Network pumping stations with one or two pumps for commercial buildings and municipal systems
- Control of mixer or flush valve.

Features and benefits

- Start/stop of wastewater pumps by means of float switches, analog pressure sensor or ultrasonic sensor
- Alternating operation of two pumps
- Overflow measurement
- Alarms and warnings
- Advanced alarm schedules
- Start and stop delays
- Daily emptying
- Foam draining
- Anti-seizing.
- Easy installation and configuration via start-up wizard.
- Help texts for settings on the operator display.
- Advanced data communication, GSM/GPRS to BMS and SCADA systems, SMS (transmit and receive) alarms and status, PC-tool support and data logging.


Optional

- Control panel with direct-on-line, star-delta or soft starter
- Battery for UPS back-up
- IO 111 sensor interface.



Lifting stations

Complete pumping stations



Technical data

Flow, Q: max. 60 l/s (216 m³/h),
recom. 31 l/s (110 m³/h)

Head, H: max. 29 m

Liquid temp.: 0 °C to + 40 °C

Discharge dia.: DN 80 to DN 100.

Applications

- Single- and multi-family houses
- Weekend cottages
- Restaurants
- Small hotels
- Sewage systems in the open country
- Percolation systems.

Features and benefits

- Ready for installation
- Flexible pipe connection
- Cable plug connection
- Unique clamp assembly system
- Single-channel and vortex impellers
- Solids passage up to 100 mm
- Low risk of clogging
- Minimum downtime
- Low operating costs
- Liquidless motor cooling
- Unique cartridge shaft seal
- Modular design.



Sololift+

Domestic lifting stations

Applications

- Extra bathrooms
- Basement installations
- Low-cost bathrooms in holiday cottages
- Added facilities in hotels and guesthouses
- Bathrooms for the elderly or the disabled
- Renovation of offices and other commercial buildings.

Features and benefits

- Unique design with smooth line and rounded edges - fits every modern bathroom environment.
- Plug-and-go product - all you need in one package.
- Low noise level.
- Discharge pipe connection in the side ensures easy maintenance.
- Flexible discharge pipe adapters for outer pipe diameters of Ø23, Ø25, Ø28 and Ø32 mm.
- Thermal overload switch.
- Cover without screws - easy service.
- Easy connection of extra sanitary appliances.

CWC-3

- Especially designed for wall-hung toilets
- Compact and slim for easy integration into the wall.

C-3

- Especially designed for high liquid temperature wastewater from washing machine or dishwasher
- Compact and slim for easy installation under a wash basin or in a closet.



Liftaway B and C

Domestic lifting stations

Technical data for Liftaway B

Inlet dimension: 3 x DN 100
 Discharge connection: DN 40
 Effective volume: 40 l.

Technical data for Liftaway C

Inlet dimension: 3 x DN 100
 + 1 x DN 40/50
 Discharge connection: DN 40
 Effective volume: 13 l.

Applications

- Collection of drainage and surface water
- Collection and pumping of wastewater from basement and laundry rooms below sewer level
- Collection and pumping of wastewater from washbasins, washing machines and floor drains to sewer level
- Collection and pumping of rainwater.

Features and benefits

- To be fitted with pumps from the Unilift KP and AP range.

Liftaway B

- Telescopic part for easy height adjustment
- Flexible and easy installation.


Liftaway C

- Functional design and easy to clean
- Overflow protection device
- Active carbon filter to eliminate odours
- Compact and slim for easy installation under a washbasin or in a closet.



SPO

Water supply pumps approved for drinking water



Technical data

Flow, Q: max. 6 m³/h
 Head, H: max. 75 m
 Liquid temp.: 0 °C to 40 °C
 Installation depth: max. 20 m below water level
 Operat. pressure: max. 10 bar.

Applications

- Private homes and week-end cottages
- Conventional 6" boreholes
- Shallow wells
- Rainwater collection in tanks
- Boosting of public water and
- Emptying of garden ponds.

Features and benefits

- Long service life as all components are of stainless steel
- Stable operation
- Easy to install.



MS motors

Stainless steel 4" and 6" submersible motors

Motor sizes

4" motor: 0.37 to 7.5 kW
 6" motor: 5.5 to 30 kW.

Applications

The Grundfos MS submersible motors can be fitted on all Grundfos SP A, SP pumps and can be used in the high-pressure booster modules, type BM and BMB.

Features and benefits

- Overtemperature protection by means of a built-in Tempcon temperature transmitter
- Standardised NEMA flange and shaft end
- Completely encapsulated in stainless steel
- Canned type submersible motor, all surfaces in contact with the liquid are made of stainless steel
- Liquid-cooled and has liquid-lubricated bearings.

Options

- Material variants.



MMS motors

Stainless steel 6", 8", 10", 12" rewindable submersible motors

Motor sizes

6": 3.7 to 37 kW
 8": 22 to 110 kW
 10": 75 to 190 kW
 12": 147 to 250 kW.

Applications


The Grundfos MMS submersible motors can be fitted on all Grundfos SP and SP-G pumps.

Features and benefits

- Wide range of rewindable motors
- Easily rewound
- Protection against upthrust
- High efficiency
- 6" and 8" have standardised NEMA flange and shaft end
- Mechanical shaft seal, ceramic/carbon or SiC/SiC
- PVC or PE/PA windings.

Options

- Material variants
- Overtemperature protection via Pt100/ Pt1000.

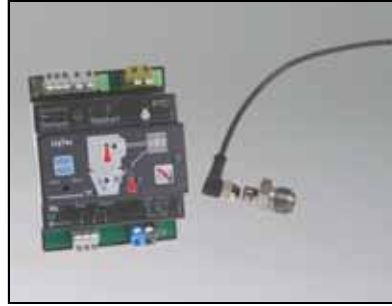

LiqTec

Control and monitoring units

Applications

- Monitoring and protection of pumps and processes.

Features and benefits

- Protection against dry running
- Protection against liquid temperatures exceeding 130 °C ± 5 °C
- Protection against too high motor temperatures
- Manual or automatic restarting possible from a remote PC
- Simple installation - plug-and-play technology
- Robust sensor.



CUE

Frequency converters for three-phase pumps

Technical data

- Mains voltage:
 1 x 200-240 V
 3 x 400-500 V
 3 x 525-600 V
 3 x 575-690 V.

Applications

Adjustment of the pump performance to the demand. Together with sensors, the CUE offers these control modes:

- proportional differential pressure
- constant differential pressure
- constant pressure
- constant pressure with stop function
- constant level
- constant level with stop function
- constant flow rate
- constant temperature.

The CUE can also be controlled by an external signal or via GENIbus.

Features and benefits

- Adjustment of the pump performance to the demand, thus saving energy.
- Easy installation, as the CUE is designed for GRUNDFOS pumps.
- Short-circuit-protected output; no motor-protective circuit breaker required.
- Fault indication via display and a relay, if fitted.
- External setpoint influence via three programmable inputs.



MP 204, CU 300, CU 301

Control and monitoring units

Applications

Monitoring and protection of pump installations.

Features and benefits

- Protection against dry running and too high motor temperature
- Constant monitoring of pump energy consumption
- Reading out of operating data via R100.

Options

- Connection to large control systems via bus communication
- Connection of sensors enabling control based on sensor signals.



Control MPC

Control and monitoring units

Technical data

- Control of up to six identical pumps in parallel
- Motors from 0.37 - 75 kW can be connected (on request up to 315 kW)
- Enclosure class: IP54.

Applications

- Heating systems
- Air-conditioning systems
- Cooling systems
- Pressure booster systems
- Industrial processes
- Water supply systems.

The Control MPC is designed for these pump types:

- CR(E), CRI(E) and CRN(E)
- NB(E), NBG(E)
- NK(E), NKG(E)
- TP
- TPE Series 1000
- TPE Series 2000
- HS
- SP
- MAGNA, UPE Series 2000.

Features and benefits

- Easy installation and start-up
- Simple control
- Application-optimised software
- Modular solution with possibility of expansion
- Data communication via Ethernet, LON, Profibus, etc.



Control MPC Series 2000

Control and monitoring units for Series 2000 pumps

Technical data

- Control of up to six Grundfos MAGNA, UPE, TPE Series 2000 pumps of identical pump type and size.
- Voltage supply: 1 x 100-240 V.
- All motor sizes can be connected.
- Enclosure class: IP54.

Applications

- Heating systems
- Air-conditioning systems.

Features

Optimal adjustment of the performance to the demand by closed-loop control of these parameters:

- proportional differential pressure
- constant differential pressure
- differential pressure (remote) *
- flow rate *
- temperature *
- temperature difference. *

* External sensor required.



CIM / CIU

Fieldbus communication interfaces

Technical data

The CIM/CIU interfaces enable the connection of Grundfos electronic products to standard fieldbus networks. CIM can be installed as an add-on module in 11-22 kW E-pumps and CU 361; for other products, use the CIU box with internal power supply.

Applications

The following product ranges are supported:

- MAGNA/UPE*
- CRE/CRNE/CRIE, MTRE, CME, NBE/NKE, TPE Series 1000/2000, CUE
- Hydro MPC / Control MPC / Multi-E
- CR Monitor*
- MP 204*
- Dedicated Controls*
- AutoAdapt*.

* = Not supported by all CIM/CIU types.

Features

- Available with GENibus, BACnet MS/TP, LON, Modbus RTU, Profibus DP and GSM
- Modular design
- Based on standard functional profiles.



R100

Wireless remote control

Applications

All pumps designed for wireless communication.

Features and benefits

- Simple and quick setting of the pump
- Reading out of various operating and fault signals
- Printing out of status information.



VFS

Vortex flow sensors for liquids

Technical data

Flow range: 1-400 l/min
 Power supply: 5 V DC PELV
 Output signal: 0.5 - 3.5 V
 Operation temp.: 0 °C to 100 °C
 Meas. technology: MEMS

Applications

- Thermal management in solar heating systems
- Calorimetric capability - for solar heat pumps
- Industrial process flow control
- Cooling and temperature control for e.g. manifold systems
- Floor/radiant heating and valve systems.

Features and benefits

- No moving parts
- Flow- and temperature-sensor-in-one
- Flow range 1-12 and 2-40 l/min in 42 % glycol mixture with stainless steel flow pipe and insert
- Suitable for wet, aggressive media
- Ratiometric output for Dedicated Controls
- Wide range of accessories
- Approved for drinking water.

Options

- Power supply and signal converter SI 010 CNV for desired 4-20 mA signal output. Additionally, the SI 010 CNV converts to 2-10 V or 1-5 V.



RPS and DPS 100

Relative and differential pressure sensors for liquids

Technical data

| | |
|------------------------|----------------|
| RPS range: | 0-10 bar |
| DPS 100 range: | 0-6 bar |
| Power supply: | 5 V DC PELV |
| RPS output signal: | 0.5 - 3.5 V |
| DPS 100 output signal: | 0.5 - 4.5 V |
| Operation temp.: | 0 °C to 100 °C |
| Meas. technology: | MEMS |

Applications

- Domestic hot-water systems
- Central heating systems
- Dry-running protection in solar systems and boilers
- Surveillance of filter efficiency
- Pressure control for manifold systems.

Features and benefits

- Pressure- and temperature-sensor-in-one
- Differential pressure sensor in high resolution version
- Suitable for wet, aggressive media
- Ratiometric output for Dedicated Controls
- Wide range of accessories
- Approved for drinking water.

Options

- Power supply and signal converter SI 010 CNV for desired 4-20 mA signal output. Additionally, the SI 010 CNV converts to 2-10 V or 1-5 V.



DPI

Differential pressure transmitters for media in industry

Technical data

| | |
|-------------------|--------------------|
| Pressure range: | 0-10 bar |
| Power supply: | 12-30 V DC |
| Output signal: | 4-20 mA |
| Operating temp.: | - 10 °C to + 70 °C |
| Meas. technology: | MEMS |

Applications

- Pump and pump control systems
- Heat exchanger control systems (monitoring fouling)
- Filter monitoring
- Schlecht-Punkt-Regelung (SPR)
- Water treatment systems.

Features and benefits

- Venturi measurement
- Constant differential pressure
- Differential pressure (remote)
- Suitable for wet, aggressive media
- Wide range of accessories.

Options

- Upgrade package for TP1000
- Power supply SI 001 PSU for > 30 m cable lengths.



Pressure tanks

Diaphragm and bladder tanks

Technical data

| | |
|-------------------|--------------|
| Tank size: | 8-5000 l |
| Liquid temp.: | max. + 90 °C |
| Operat. pressure: | max. 16 bar. |

Applications

- Water supply systems in housing
- Pressure booster systems in housing
- Agriculture
- Horticulture
- Industrial systems.

Features and benefits

- Optimal water supply
- Reduced number of pump starts
- Ideal for drinking water.



GT-HR tanks for heating

Diaphragm-type expansion tank

Technical data

Tank size: 8-1000 l
Liquid temp.: max. + 90 °C
Operat. pressure: max. 6 bar.

Applications

- Domestic-heating and chilled-water system
- Commercial-building heating and chilled-water systems
- Industrial-heating and chilled-water system.

Argentina

Bombas GRUNDFOS de Argentina S.A.
Ruta Panamericana km. 37.500 Lote 34A
1619 - Garin
Pcia. de Buenos Aires
Phone: +54-3327 414 444
Telefax: +54-3327 411 111

Australia

GRUNDFOS Pumps Pty. Ltd.
P.O. Box 2040
Regency Park
South Australia 5942
Phone: +61-8-8461-4611
Telefax: +61-8-8340 0155

Austria

GRUNDFOS Pumpen Vertrieb Ges.m.b.H.
Grundfosstraße 2
A-5082 Grödig/Salzburg
Tel.: +43-6246-883-0
Telefax: +43-6246-883-30

Belgium

N.V. GRUNDFOS Bellux S.A.
Boomssesteenweg 81-83
B-2630 Aartselaar
Tél.: +32-3-870 7300
Télécopie: +32-3-870 7301

Belorussia

Представительство ГРУНДФОС в Минске
220123, Минск,
ул. В. Хоружей, 22, оф. 1105
Тел.: +(37517) 233 97 65,
Факс: +(37517) 233 97 69
E-mail: grundfos_minsk@mail.ru

Bosnia/Herzegovina

GRUNDFOS Sarajevo
Trg Heroja 16,
BiH-71000 Sarajevo
Phone: +387 33 713 290
Telefax: +387 33 659 079
e-mail: grundfos@bih.net.ba

Brazil

BOMBAS GRUNDFOS DO BRASIL
Av. Humberto de Alencar Castelo Branco, 630
CEP 09850 - 300
São Bernardo do Campo - SP
Phone: +55-11 4393 5533
Telefax: +55-11 4343 5015

Bulgaria

Grundfos Bulgaria EOOD
Slatina District
Iztocna Tangenta street no. 100
BG - 1592 Sofia
Tel. +359 2 49 22 200
Fax. +359 2 49 22 201
email: bulgaria@grundfos.bg

Canada

GRUNDFOS Canada Inc.
2941 Brighton Road
Oakville, Ontario
L6H 6C9
Phone: +1-905 829 9533
Telefax: +1-905 829 9512

China

GRUNDFOS Pumps (Shanghai) Co. Ltd.
50/F Maxdo Center No. 8 XingYi Rd.
Hongqiao development Zone
Shanghai 200336
PRC
Phone: +86-021-612 252 22
Telefax: +86-021-612 253 33

Croatia

GRUNDFOS CROATIA d.o.o.
Cebini 37, Buzin
HR-10010 Zagreb
Phone: +385 1 6595 400
Telefax: +385 1 6595 499
www.grundfos.hr

Czech Republic

GRUNDFOS s.r.o.
Čajkovského 21
779 00 Olomouc
Phone: +420-585-716 111
Telefax: +420-585-716 299

Denmark

GRUNDFOS DK A/S
Martin Bachs Vej 3
DK-8850 Bjerringbro
Tlf.: +45-87 50 50 50
Telefax: +45-87 50 51 51
E-mail: info_GDK@grundfos.com
www.grundfos.com/DK

Estonia

GRUNDFOS Pumps Eesti OÜ
Peterburi tee 92G
11415 Tallinn
Tel: + 372 606 1690
Fax: + 372 606 1691

Finland

OY GRUNDFOS Pumput AB
Mestartintie 11
FIN-01730 Vantaa
Phone: +358-3066 5650
Telefax: +358-3066 56550

France

Pompes GRUNDFOS Distribution S.A.
Parc d'Activités de Chesnes
57, rue de Malacombe
F-38290 St. Quentin Fallavier (Lyon)
Tél.: +33-4 74 82 15 15
Télécopie: +33-4 74 94 10 51

Germany

GRUNDFOS GMBH
Schlüterstr. 33
40699 Erkrath
Tel.: +49-(0) 211 929 69-0
Telefax: +49-(0) 211 929 69-3799
e-mail: infoservice@grundfos.de
Service in Deutschland:
e-mail: kundendienst@grundfos.de

Greece

GRUNDFOS Hellas A.E.B.E.
20th km. Athinon-Markopoulou Av.
P.O. Box 71
GR-19002 Peania
Phone: +0030-210-66 83 400
Telefax: +0030-210-66 46 273

Hong Kong

GRUNDFOS Pumps (Hong Kong) Ltd.
Unit 1, Ground floor
Siu Wai Industrial Centre
29-33 Wing Hong Street &
68 King Lam Street, Cheung Sha Wan
Kowloon
Phone: +852-27861706 / 27861741
Telefax: +852-27858664

Hungary

GRUNDFOS Hungária Kft.
Park u. 8
H-2045 Törökbálint,
Phone: +36-23 511 110
Telefax: +36-23 511 111

India

GRUNDFOS Pumps India Private Limited
118 Old Mahabalipuram Road
Thoraipakkam
Chennai 600 096
Phone: +91-44 2496 6800

Indonesia

PT GRUNDFOS Pompa
Jl. Rawa Sumur III, Blok III / CC-1
Kawasan Industri, Pulogadung
Jakarta 13930
Phone: +62-21-460 6909
Telefax: +62-21-460 6910 / 460 6901

Ireland

GRUNDFOS (Ireland) Ltd.
Unit A, Merrywell Business Park
Ballymount Road Lower
Dublin 12
Phone: +353-1-4089 800
Telefax: +353-1-4089 830

Italy

GRUNDFOS Pompe Italia S.r.l.
Via Gran Sasso 4
I-20060 Truccazzano (Milano)
Tel.: +39-02-95838112
Telefax: +39-02-95309290 / 95838461

Japan

GRUNDFOS Pumps K.K.
Gotanda Metalion Bldg., 5F,
5-21-15, Higashi-gotanda
Shiagawa-ku, Tokyo
141-0022 Japan
Phone: +81 35 448 1391
Telefax: +81 35 448 9619

Korea

GRUNDFOS Pumps Korea Ltd.
6th Floor, Aju Building 679-5
Yeoksam-dong, Kangnam-ku, 135-916
Seoul, Korea
Phone: +82-2-5317 600
Telefax: +82-2-5633 725

Latvia

SIA GRUNDFOS Pumps Latvia
Deglava biznesa centrs
Augusta Deglava ielā 60, LV-1035, Rīga,
Tālr.: + 371 714 9640, 7 149 641
Fakss: + 371 914 9646

Lithuania

GRUNDFOS Pumps UAB
Smolensko g. 6
LT-03201 Vilnius
Tel: + 370 52 395 430
Fax: + 370 52 395 431

Malaysia

GRUNDFOS Pumps Sdn. Bhd.
7 Jalan Peguam U1/25
Glenmarie Industrial Park
40150 Shah Alam
Selangor
Phone: +60-3-5569 2922
Telefax: +60-3-5569 2866

México

Bombas GRUNDFOS de México S.A. de C.V.
Boulevard TLC No. 15
Parque Industrial Stiva Aeropuerto
Apodaca, N.L. 66600
Phone: +52-81-8144 4000
Telefax: +52-81-8144 4010

Netherlands

GRUNDFOS Netherlands
Veluwezoom 35
1326 AE Almere
Postbus 22015
1302 CA ALMERE
Tel.: +31-88-478 6336
Telefax: +31-88-478 6332
e-mail: info_gnl@grundfos.com

New Zealand

GRUNDFOS Pumps NZ Ltd.
17 Beatrice Tinsley Crescent
North Harbour Industrial Estate
Albany, Auckland
Phone: +64-9-415 3240
Telefax: +64-9-415 3250

Norway

GRUNDFOS Pumper A/S
Strømsveien 344
Postboks 235, Leirdal
N-1011 Oslo
Tlf.: +47-22 90 47 00
Telefax: +47-22 32 21 50

Poland

GRUNDFOS Pompy Sp. z o.o.
ul. Klonowa 23
Baranowo k. Poznania
PL-62-081 Przeźmierowo
Tel: (+48-61) 650 13 00
Fax: (+48-61) 650 13 50

Portugal

Bombas GRUNDFOS Portugal, S.A.
Rua Calvet de Magalhães, 241
Apartado 1079
P-2770-153 Paço de Arcos
Tel.: +351-21-440 76 00
Telefax: +351-21-440 76 90

România

GRUNDFOS Pompe România SRL
Bd. Biruintei, nr 103
Pantelimon county Ilfov
Phone: +40 21 200 4100
Telefax: +40 21 200 4101
E-mail: romania@grundfos.ro

Russia

ООО Грундфос
Россия, 109544 Москва, ул. Школьная 39
Тел. (+7) 495 737 30 00, 564 88 00
Факс (+7) 495 737 75 36, 564 88 11
E-mail grundfos.moscow@grundfos.com

Serbia

GRUNDFOS Predstavništvo Beograd
Dr. Milutina Ivkovića 2a/29
YU-11000 Beograd
Phone: +381 11 26 47 877 / 11 26 47 496
Telefax: +381 11 26 48 340

Singapore

GRUNDFOS (Singapore) Pte. Ltd.
24 Tuas West Road
Jurong Town
Singapore 638381
Phone: +65-6865 1222
Telefax: +65-6861 8402

Slovenia

GRUNDFOS d.o.o.
Štandrova 8b, SI-1231 Ljubljana-Črnuče
Phone: +386 1 568 0610
Telefax: +386 1 568 0619
E-mail: slovenia@grundfos.si

South Africa

Corner Mountjoy and George Allen Roads
Wilbart Ext. 2
Bedfordview 2008
Phone: (+27) 11 579 4800
Fax: (+27) 11 455 6066
E-mail: lsmart@grundfos.com

Spain

Bombas GRUNDFOS España S.A.
Camino de la Fuentecilla, s/n
E-28110 Algete (Madrid)
Tel.: +34-91-848 8800
Telefax: +34-91-628 0465

Sweden

GRUNDFOS AB
Box 333 (Lunnagårdsgatan 6)
431 24 Mölndal
Tel.: +46(0)771-32 23 00
Telefax: +46(0)31-331 94 60

Switzerland

GRUNDFOS Pumpen AG
Bruggacherstrasse 10
CH-8117 Fällanden/ZH
Tel.: +41-1-806 8111
Telefax: +41-1-806 8115

Taiwan

GRUNDFOS Pumps (Taiwan) Ltd.
7 Floor, 219 Min-Chuan Road
Taichung, Taiwan, R.O.C.
Phone: +886-4-2305 0868
Telefax: +886-4-2305 0878

Thailand

GRUNDFOS (Thailand) Ltd.
92 Chaloeam Phrakiat Rama 9 Road,
Dokmai, Pravej, Bangkok 10250
Phone: +66-2-725 8999
Telefax: +66-2-725 8998

Turkey

GRUNDFOS POMPA San. ve Tic. Ltd. Sti.
Gebze Organize Sanayi Bölgesi
Ihsan dede Caddesi,
2. yol 200. Sokak No. 204
41490 Gebze/ Kocaeli
Phone: +90 - 262-679 7979
Telefax: +90 - 262-679 7905
E-mail: satis@grundfos.com

Ukraine

ТОВ ГРУНДФОС УКРАЇНА
01010 Київ, Вул. Московська 86,
Тел.: (+38 044) 390 40 50
Факс.: (+38 044) 390 40 59
E-mail: ukraine@grundfos.com

United Arab Emirates

GRUNDFOS Gulf Distribution
P.O. Box 16768
Jebel Ali Free Zone
Dubai
Phone: +971-4- 8815 166
Telefax: +971-4-8815 136

United Kingdom

GRUNDFOS Pumps Ltd.
Grovebury Road
Leighton Buzzard/Beds. LU7 8TL
Phone: +44-1525-850000
Telefax: +44-1525-850011

U.S.A.

GRUNDFOS Pumps Corporation
17100 West 118th Terrace
Olathe, Kansas 66061
Phone: +1-913-227-3400
Telefax: +1-913-227-3500

Usbekistan

Представительство ГРУНДФОС в Ташкенте
700000 Ташкент ул.Усмана Носира 1-й
тулик 5
Телефон: (3712) 55-68-15
Факс: (3712) 53-36-35

Addresses revised 11.06.2010

GRUNDFOS A/S
DK-8850 Bjerringbro
Denmark
Telephone: +45 87 50 14 00

www.grundfos.com

The name Grundfos, the Grundfos logo, and the payoff Be–Think–Innovate are registered trademarks owned by Grundfos Management A/S or Grundfos A/S, Denmark. All rights reserved worldwide.

