

## **AFTERCARE INSTRUCTIONS**

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces.

All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting, even the non-scratch cleaners.

## **GUARANTEE**

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

As gold and special effect finishes are softer than chromium plate, special care must be taken when cleaning, a 3 year guarantee covers these finishes.

**NOTE: The 5-year guarantee on the cartridge is invalidated if damaged by any waterborne debris.**

In the interests of continuous product development we reserve the right to alter specification as necessary

**PRODUCT CODE: J PBF C / G / SC / COM**

**PRODUCT IDENTIFICATION CODE LASER ETCHED ON PRODUCT**

Installer please fill in code here \_\_\_\_\_.

TELEPHONE HELPLINE! +44 (0)844 701 6273

Bristan Group Limited  
Birch Coppice Business Park  
Dordon  
Tamworth  
Staffordshire  
B78 1SG  
UK  
A Masco Company  
Website: [www.bristan.com](http://www.bristan.com)  
Telephone: +44 (0) 844 701 6274  
Facsimile: +44 (0) 844 701 6275  
Email: [enquire@bristan.com](mailto:enquire@bristan.com)

(FI PBF)

(Rev.D3)

# BRISTAN

## **Java Pillar Mounted Bath Filler**

## **Fitting Instructions & Contents List**

**Please keep these instructions for future reference and request of replacement part**

## WATER PRESSURE

This mixer is only suitable for use at mains supply pressures (Minimum 1.0 bar). For optimum use both the hot and cold supplies should be reasonably balanced. Where the supplies are unbalanced, i.e. Hot water for the cylinder tank/cold from the mains, approved check valves must be fitted in the supply pipes.

This mixer should be installed in compliance with Water Regulations. For further details contact your Local Water Authority.

## INSTALLATION



1. Identify all components and check for completeness, particularly before arranging fitting.
2. Fit the pillars to the body using the large washers provided.
3. Fit the pillars to the bath using backnuts and washers.
4. Fully open the mixer in the mid position, letting it run for a few minutes to flush the system.
5. Check all joints and connections for leaks.
6. See over the page for aftercare instructions.

## MAINTENANCE

### If the fitting begins to drip:

1. Turn off the water supply.
2. Remove grub screws from rear of handle and then remove handle by pulling from valve.
3. Using a suitable spanner, remove valve. Once removed, carefully clean seating, rubber washer and ceramic disc.
4. Replace all of the above then on the water supply.
5. If problem persists contact our helpline quoting the product code.

## DIAGRAM

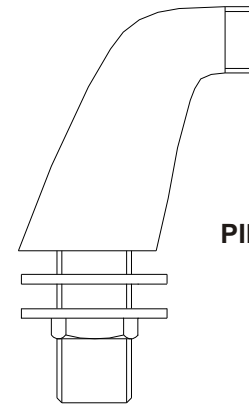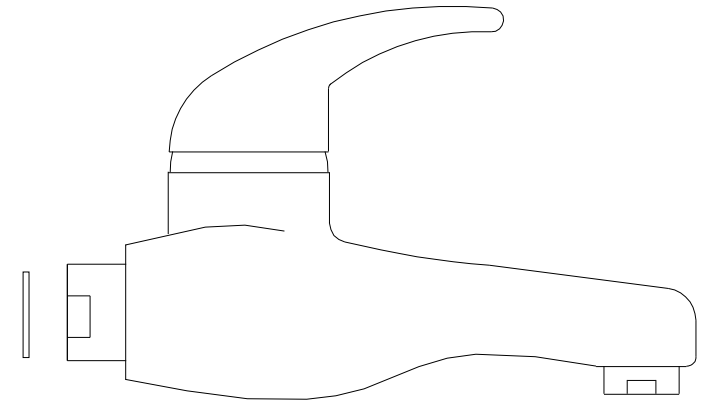

**PILLAR MOUNTING**

**Please Note:** In the unlikely event you find a part missing please contact our Customer Service Helpline on **0844 701 6273** or e-mail **enquire@bristan.com** for immediate despatch of part.