

AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces.

All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting, even the non-scratch cleaners.

GUARANTEE

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

As gold and special effect finishes are softer than chromium plate, Special care must be taken when cleaning, a 3 year guarantee covers these finishes.

NOTE: The 5-year guarantee on the cartridge is invalidated if damaged by any waterborne debris.

In the interests of continuous product development we reserve the right to alter specification as necessary

**PRODUCT CODE: J P B S M C, M T P B S M C, J W M B S M C,
J W M B S M C / C O M / G / S C / M T W M B S M C**

PRODUCT IDENTIFICATION CODE LASER ETCHED ON PRODUCT

Installer please fill in code here _____.

TELEPHONE HELPLINE! +44 (0)844 701 6273

Bristan Group Limited
Birch Coppice Business Park
Dordon
Tamworth
Staffordshire
B78 1SG
UK
A Masco Company
Website: www.bristan.com
Telephone: +44 (0) 844 701 6274
Facsimile: +44 (0) 844 701 6275
Email: enquire@bristan.com

(FI JMT WPSBSM)

(Rev.D5)

BRISTAN

Java Wall or Pillar Mounted Bath Shower Mixer

Fitting Instructions

Please keep these instructions for future reference and request of replacement part


WATER PRESSURE

This mixer is only suitable for use at mains supply pressures.
(Minimum 1.0 bar).

For optimum use both the hot and cold supplies should be reasonably balanced.

This mixer should be installed in compliance with Water Regulations.

Where the supplies are unbalanced, i.e. hot water from the cylinder tank / cold from the mains, approved check valves must be fitted in the supply pipes. For further details contact your Local Water Authority.

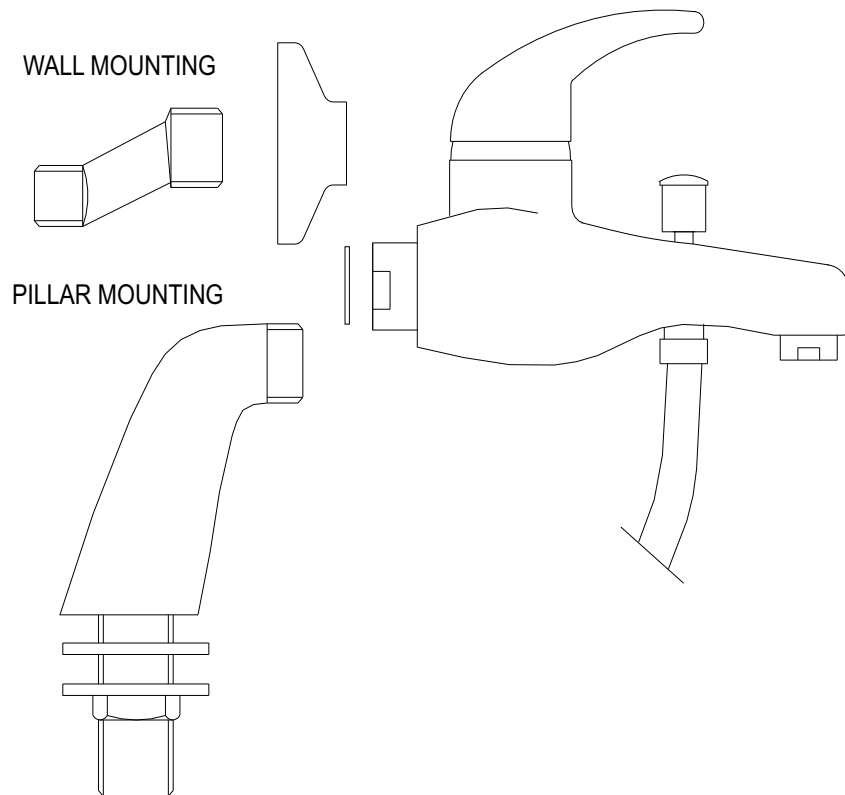

INSTALLATION

1. Identify all components and check for completeness, particularly before arranging fitting.

WALL MOUNTED BSM

NOTE :- As there are no backnuts or fixing plates supplied, the bath shower mixer needs to be connected / supported with rigid pipe work. (Wall mount fittings for exposed and concealed pipe work are available, see the Bristan Product and Price Guide).

2. Fit and seal the elbows into the wall connections, 1/2" BSP female (not provided).
3. Fit the flange covers and mixer body to the elbows using the large sealing washers and connect the hot and cold water supplies.

PILLAR MOUNTED BSM

2. Fit the pillars to the body using the large washers provided.
3. Fit the pillars to the bath using backnuts and washers.

WALL AND PILLAR MOUNTED BSM

4. Fit the hose to the mixer and the handset using the small sealing washers.
5. Fix wall bracket to the wall, ensuring that the handset will reach it.
6. Fully open the mixer in the mid position, letting it run for a few minutes to flush the system.
7. Operate the mixer in both bath and shower mode. to switch from bath to shower mode, pull the diverter up. After use the mixer
8. Check all joints and connections for leaks.
9. See over the page for aftercare instructions.

N.B. Before Installation, please write the name and product code of your fitting in the spaces provided overleaf. This will ensure a speedier service if you should need to phone the help line.