

## AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces.

All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting even the non-scratch cleaners.

### **GUARANTEE**

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

*In the interests of continuous product development we reserve the right to alter specification as necessary*

### **TELEPHONE HELP LINE! 0870 4425553**

Bristan Limited  
Lagrange  
Lichfield Road Industrial Estate  
Tamworth  
Staffordshire  
B79 7XD  
UK

Web Site: [www.bristan.com](http://www.bristan.com)  
Telephone: 0870 4425556  
Facsimile: 0870 4425554  
Email: [enquire@bristan.com](mailto:enquire@bristan.com)  
(FI CL ACC) (Rev. D1)

(K)

## Chill Bathroom Accessories



Prior to drilling into walls, check there are no hidden electrical wires, cables or water supply pipes with the aid of an electronic detector. If you use power tools do not forget:

- Wear eye protection
- Unplug equipment after use

## Fitting Instructions & Contents List

Please keep these instructions for future reference and for the ordering of spare parts.

Congratulations on your purchase of this high quality Chill Bathroom Accessory. Before proceeding with the installation please carefully read the instructions in order to ensure proper care and assembly of this accessory.

## **INSTALLATION**


1. Identify all components and check for completeness, particularly before arranging fitting.
- 2(a). **Single wall fixing:** Establish the position for the accessory (4) and mark out the fixing holes using the wall bracket (2) as a template.
- 2(b). **Double wall fixing:** Either use the accessory as a template to establish the position for the wall fixings and mark out the fixing holes or measure the distance between the fixing holes.
3. Drill holes to suit, and insert rawl plugs (1) if required.



Prior to drilling into walls, check there are no hidden electrical wires, cables or water supply pipes with the aid of an electronic detector. If you use power tools do not forget:

- Wear eye protection
- Unplug equipment after use

4. Screw the wall bracket (2) to the wall.
5. Loosen off the grubscrew (**but do not remove**) and place the accessory over the wall bracket with the grub screw (5) at the bottom.
6. Tighten up the grub screw (5) until the accessory (4) is secure against the wall.
7. See over the page for aftercare instructions.

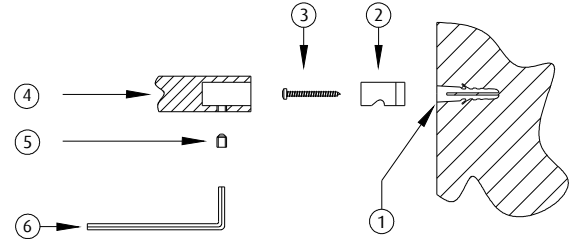

1. Rawl plug
2. Wall bracket
3. Screw
4. Accessory
5. Grub screw
6. Hexagonal key

### **Please Note: -**

In the unlikely event you find a part missing please contact our Customer Service Help line on 0870 4425553 or email [enquire@bristan.com](mailto:enquire@bristan.com) for immediate dispatch of part.