

AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces.

All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting even the non-scratch cleaners.

GUARANTEE

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

NOTE: - the 5 year guarantee on the valves is invalidated if damaged by any waterborne debris.

In the interests of continuous product development we reserve the right to alter specification as necessary

PRODUCT CODE: VG SNK C

TELEPHONE HELP LINE! +44 (0)870 4425553

Bristan Limited
Lagrange
Lichfield Road Industrial Estate
Tamworth
Staffordshire
B79 7XD
UK

A MASCO COMPANY

Web Site: www.bristan.com

Telephone: +44 (0)870 4425556

Facsimile: +44 (0)870 4425554

Email: enquire@bristan.com

(FI VG SNK) (Rev. D2)

(SM)

BRISTAN

Vegas Single Flow Sink Mixer

Fitting Instructions & Contents List

Please keep these instructions for future reference and for the ordering of spare parts.

This mixer is suitable for use at pressures of 0.5 bar or more. For optimum use both the hot and cold supplies should be reasonably balanced. This mixer should be installed in compliance with Water Regulations. For further details contact your Local Water Authority.

N.B. This mixer is supplied with a single check valve which should be used on the hot supply when the mixer is fitted to un-balanced supplies to prevent backflow i.e. Cold from the mains and hot via a hot water cylinder. To comply with Water Regulations a further check valve must be fitted on the cold supply. For further details contact your Local Water Authority.

Installation:


1. Identify all components and check for completeness, particularly before arranging fitting.
2. Align the spout with the centre position of the handle lever on the valve
3. Screw in the fixing stud (E) into the base of the tap (A)
4. Pass the base column (B) over the fixing stud (E) to the base of the tap body (A)
5. Place the upper seal (D) onto the base plinth (C), the place both these parts onto the base column (B)
6. Screw the hot and cold flexible tail pipes (J) into the base of the tap body (A) where shown
7. Place the mixer tap onto the sink or worktop and pass the tail pipes (J) and studded rod (E) through the tap hole. With the tap in place check that the tail pipes (J) meet the hot and cold water feeds. If further adjustment to the plumbing is required do this now
8. If fitting the tap to a stainless steel sink, the white triangular stabilizer (F) can be placed where shown to help to stabilize the weight of the tap.
9. Pass the rubber horseshoe washer (G) and then metal horseshoe plate (H) over the fixing stud (E) and around tail pipes (J).
10. Fasten the fixing nut (I) securely onto the fixing stud (E) fixing the tap into its correct location.
11. Connect the Hot & Cold water tail pipes (J) to the water supplies using 1/2" BSP x 15mm compression fittings or similar.

After installation:

Once you have visually checked the new fittings and connections, ensure that all taps are closed except the new mixer tap, which should be left open. Turn on the water supply at the mains stop cock. As the system starts to refill, **check carefully for leaks.** Once you are fully satisfied that there are no leaks, turn on the water heating.

Clean the tap to remove any marks created during installation as instructed then replace the bag that has been provided to protect the tap until it is ready for use.

| Key: | Description: | Qty. |
|------|---|------|
| A | Tap body | 1 |
| B | Base column | 1 |
| C | Base plinth | 1 |
| D | Upper seal | 1 |
| E | Fixing stud | 1 |
| F | White triangular stabilizer (for stainless steel sinks only) | 1 |
| G | Rubber 'horseshoe' shaped washer | 1 |
| H | Metal 'horseshoe' shaped plate | 1 |
| I | Fixing nut | 1 |
| J | Hot / cold water flexible tail pipes | 2 |

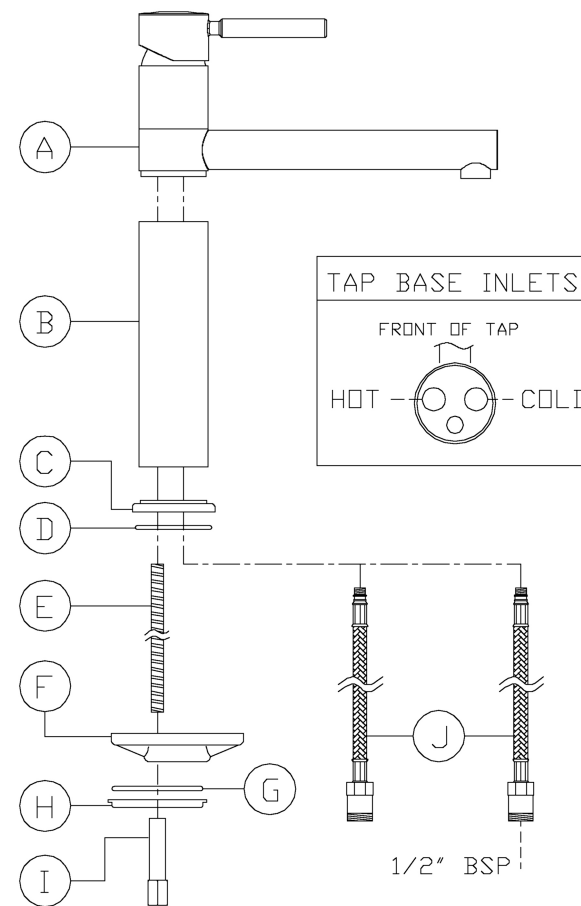

Please Note:

In the unlikely event you find a part missing please contact our Customer Service Help line on +44 (0)870 4425553 for immediate despatch of part.