



AFTERCARE INSTRUCTIONS

Your Bristan bathroom accessories have a high quality finish and should be treated with care to preserve the visible surfaces.

All surface finishes will wear if not cleaned correctly, the only safe way to clean your accessory is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting even the non scratch cleaners.

GUARANTEE

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

In the interests of continuous product development we reserve the right to alter specification as necessary

PRODUCT CODE: W04 C & W05 C

TELEPHONE HELP LINE! +44 (0) 870 4425553

Bristan Group Limited
Birch Coppice Business Park
Dordon
Tamworth
Staffordshire
B78 1SG
UK

A Masco Company
Web site: www.bristan.com
Telephone: +44 (0) 870 4425556
Facsimile: +44 (0) 870 4425554
Email: enquire@bristan.com

(FI W04+5) (Rev. D1) (SX)



Wall Outlet

Fitting Instructions & Content list

Please keep these instructions for future reference and request of spare parts.

For latest prices and delivery to your door visit MyTub Ltd 0845 303 8383 www.mytub.co.uk

Congratulations on your purchase of this high quality Shower Accessory.
Before proceeding with the installation please carefully read the instructions
in order to ensure proper care and assembly of this accessory.

INSTALLATION

1. Identify all components and check for completeness, particularly before arranging fitting.
2. Decide the most appropriate method of fixing to suite your application and the final position for the outlet.

Fixing type A

3. Plumb up the pipe work from the shower to a 15mm x ½ BSP elbow with fixing lugs (for rigidity). Make sure the depth of the elbow suits the finished wall and the length of thread on the outlet. Screw in the threaded nipple (2) into the elbow using a suitable sealant.

NOTE: - Before finishing wall turn on water supplies to check both correct system function and for leaks from joints/connections.

4. Finish wall leaving a hole to allow the wall outlet (1) to be screwed into the threaded nipple (2) after finishing the wall.
5. Using suitable sealant, screw the outlet into the threaded nipple with shroud (3) in place.

Fixing type B

3. Using suitable sealant, screw the outlet (1) on to the threaded nipple (2).
4. Place the shroud (3) over the threaded nipple (2) and onto the wall outlet body (1) prior to fixing it to the wall.
5. Fix outlet to wall and secure in place with the backnut (4) supplied, connect to pipe work in wall using appropriate adapter and sealant (not supplied).

NOTE: - Before finishing wall turn on water supplies to check both correct system function and for leaks from joints/connections.

6. See over page for aftercare instructions.


1. Wall outlet
2. Threaded Nipple
3. Shroud
4. Backnut

Please Note: -

In the unlikely event you find a part missing please contact our Customer Service Help line on +44 (0) 870 4425553 for immediate dispatch of part.

INSTALLATION DIAGRAM

Fixing Type A

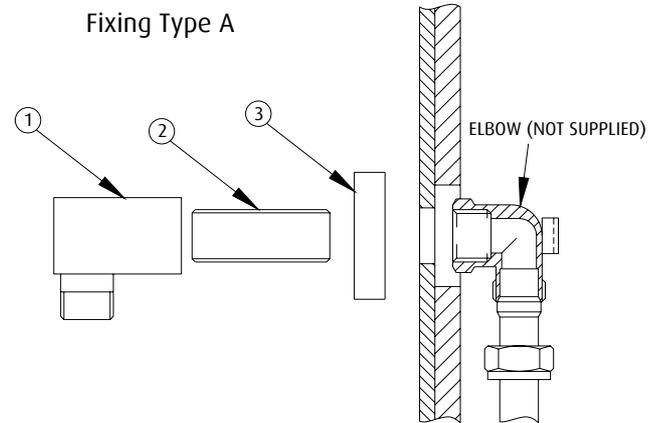

Fixing Type B

