

AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces. All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting even, non-scratch cleaners.

GUARANTEE

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture. As gold and special effect finishes are softer than chromium plate, special care must be taken when cleaning; a 3 year guarantee covers these finishes.

NOTE: The 5 year guarantee on the valves is invalidated if damaged by any waterborne debris.

In the interests of continuous product development we reserve the right to alter specification as necessary.

TELEPHONE HELP LINE: 0844 701 6273

Bristan Group Ltd
Birch Coppice Business Park
Dordon
Tamworth
Staffordshire
B78 1SG
UK
A Masco Company

Web Site: www.bristan.com
Telephone: 0844 701 6273
Facsimile: 0844 701 6275
Email: enquire@bristan.com

BRISTAN

Options Basin and Bath Taps

Fitting Instructions

**Please keep these instructions for future reference
and request of replacement parts.**

(FI ON TAP)

(Rev. D3)

(U)

For latest prices and delivery to your door visit MyTub Ltd 0845 303 8383 www.mytub.co.uk



WATER PRESSURE

These taps are suitable for use at all supply pressures. If the taps are installed at low pressure (tank fed), then the minimum height from the outlet of the nozzle to the underside of the cold tank should be approximately 2 metres to ensure adequate performance.

These taps should be installed in compliance with the Water Byelaws. For further details contact your Local Water Authority.

INSTALLATION

1. Identify all components and check for completeness, particularly before arranging fitting.
2. Fit tap handles. Fitting varies depending on handle. Either disassemble handle and use screw hidden under cap or secure plastic adaptor to valve with screw and then push on handle.


NOTE: - Handles must be bought separately.

3. Install the taps into the basin or bath using the washers and backnuts provided.
4. Connect the hot and cold water supplies.
5. Turn on the water supplies. Open both taps letting the water flow for a few minutes to check all joints and connections for leaks.
6. See over the page for aftercare instructions.

MAINTENANCE

If the fitting begins to drip:

1. Isolate water supplies.
2. Disassemble/remove handle, unscrew retaining screw and lift off the handle.
3. Unscrew the valve. Carefully clean seating, rubber washer and/or ceramic disc.
4. Refit the valves, handles and tighten retaining screw. Replace the top of the handle or handle indices.
5. If problem persists contact our helpline quoting the product code.

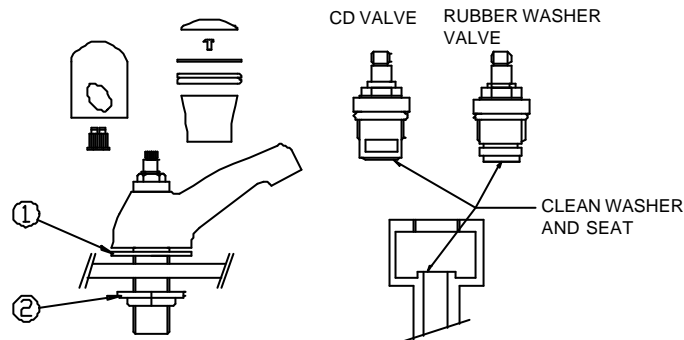

Please Note: In the unlikely event you find a part missing please contact our Customer Service Help line on 0844 701 6273 for immediate dispatch of part.