

AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces. All surface finishes will wear if not cleaned correctly, the only safe way to clean your tap is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting even the non-scratch cleaners.

GUARANTEE

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture. As gold and special effect finishes are softer than chromium plate, special care must be taken when cleaning; a 3 year guarantee covers these finishes.

NOTE: The 5 year guarantee on the valves is invalidated if damaged by any waterborne debris.

In the interests of continuous product development Bristan reserve the right to alter specification as necessary.

PRODUCT CODE:

TELEPHONE HELPLINE: 0844 701 6273

Bristan Group Ltd
Birch Coppice Business Park
Dordon
Tamworth
Staffordshire
B78 1SG
UK
A Masco Company

Web Site: www.bristan.com
Telephone: 0844 701 6273
Facsimile: 0844 701 6275
Email: enquire@bristan.com

(FI PM TAP)

(D3)

(ST)

For latest prices and delivery to your door visit MyTub Ltd 0845 303 8383 www.mytub.co.uk

BRISTAN

Prism Basin and Bath Taps

Fitting Instructions & Contents List


**Please keep these instructions for future reference
and for the request of spare parts**



WATER PRESSURE

These taps are suitable for use at all supply pressures. If the taps are installed at low pressure (tank fed), then the minimum height from the outlet of the nozzle to the underside of the cold tank should be 1.8 metres to ensure adequate performance.

These taps should be installed in compliance with Water Regulations. For further details contact your Local Water Authority.

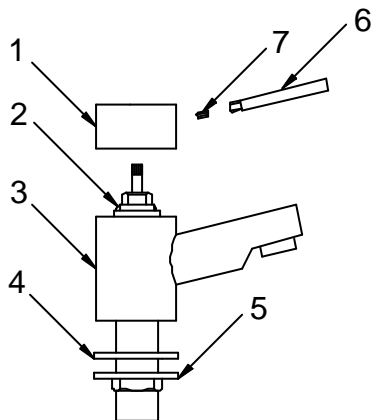

CONTENTS

- | | | |
|----|------------|------|
| 1. | Head | (x2) |
| 2. | Valve | (x2) |
| 3. | Tap Body | (x2) |
| 4. | Washer | (x2) |
| 5. | Back Nut | (x2) |
| 6. | Lever | (x2) |
| 7. | Grub Screw | (x2) |


INSTALLATION

1. Identify all components and check for completeness, particularly before arranging fitting.
2. Install the taps (3) into the basin or bath using the washers (4) between the tap and basin or bath and backnuts (5) provided.
3. Connect the hot and cold water supplies using suitable connector (not supplied).
4. Turn on the water supplies. Open both taps letting the water flow for a few minutes to check all joints and connections for leaks.
5. See over the page for aftercare instructions.

MAINTENANCE

If the fitting begins to drip:

1. Turn off the water supply.
2. Unscrew handle lever (6), loosen grub screw (7) with 2.5mm hexagon key and pull off head.
3. Remove valve (2).
4. Carefully clean seating, rubber washer and ceramic disc.
5. Replace valve and head and turn on the water supply.
6. Contact our helpline if problem persists.

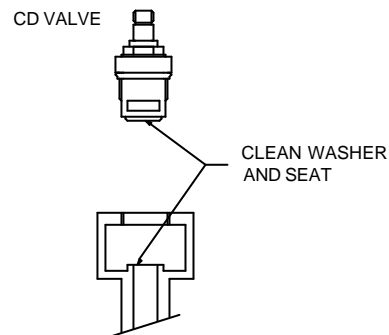

Please Note: In the unlikely event you find a part missing please contact our customer Service Help line on 0844 701 6273 for immediate dispatch of part.