



AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces. All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting even the non-scratch cleaners.

GUARANTEE

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

NOTE: The 5 year guarantee on the valve is invalidated if damaged by any water born debris.

In the interests of continuous product development we reserve the right to alter specification as necessary.

PRODUCT CODE: J WMBF C
TELEPHONE HELPLINE: 0844 701 6273

Bristan Group Ltd
Birch Coppice Business Park
Dordon
Tamworth
Staffordshire
B78 1SG
UK
A Masco Company

Web Site: www.bristan.com
Telephone: 0844 701 6274
Facsimile: 0844 701 6275
Email: enquire@bristan.com

(F1 J WMBF)

(R2)

(H)

BRISTAN

Java Wall Mounted Bath Filler

Fitting Instructions

Please keep these instructions future reference.



WATER PRESSURE

This mixer is only suitable for use at mains supply pressures (Minimum 1.0 bar). For optimum use both the hot and cold supplies should be reasonably balanced.

If the fitting is installed at low pressure (tank fed), then the minimum distance from the outlet of the nozzle to the underside of the cold tank should be approximately 3.0 metres to ensure adequate performance.

This mixer should be installed in compliance with Water Regulations. Where the supplies are unbalanced, i.e. hot water from the cylinder tank / cold from the mains, approved check valves must be fitted in the supply pipes. For further details contact your Local Water Authority.

INSTALLATION

1. Identify all components and check for completeness, particularly before arranging fitting.

Please note: As there are no backnuts or fixing plates supplied, the bath filler needs to be connected / supported with rigid pipe work.

2. Fit and seal the elbows into the wall connections, 1/2" BSP female (not provided).


3. Fit the flange covers and mixer body to the elbows using the large sealing washers and connect the hot and cold water supplies.

4. Fully open the mixer in the mid position, letting it run for a few minutes to flush the system.

5. Check all joints and connections for leaks.

6. See over the page for aftercare instructions.

DIAGRAM

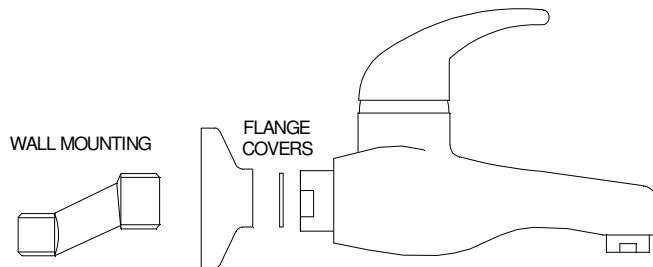

MAINTENANCE

If any of the fittings begin to drip:

1. Turn off the water supply.
2. Remove handle by unscrewing shroud, and then unscrewing from cartridge retaining nut. Then unscrew cartridge retaining nut and remove the cartridge from the body.
3. Once removed, carefully clean seating and all exposed parts.
4. Replace all of the above then turn on the water supply.
5. If problem persists contact our helpline quoting the product code.

Please Note: In the unlikely event you find a part missing please contact our Customer Service Helpline on 0844 701 6273 or email enquire@bristan.com for immediate despatch of part.