


mira
Flight SFE

Pivot
Enclosure
with 762, 800, 900 door
(71 & 90)

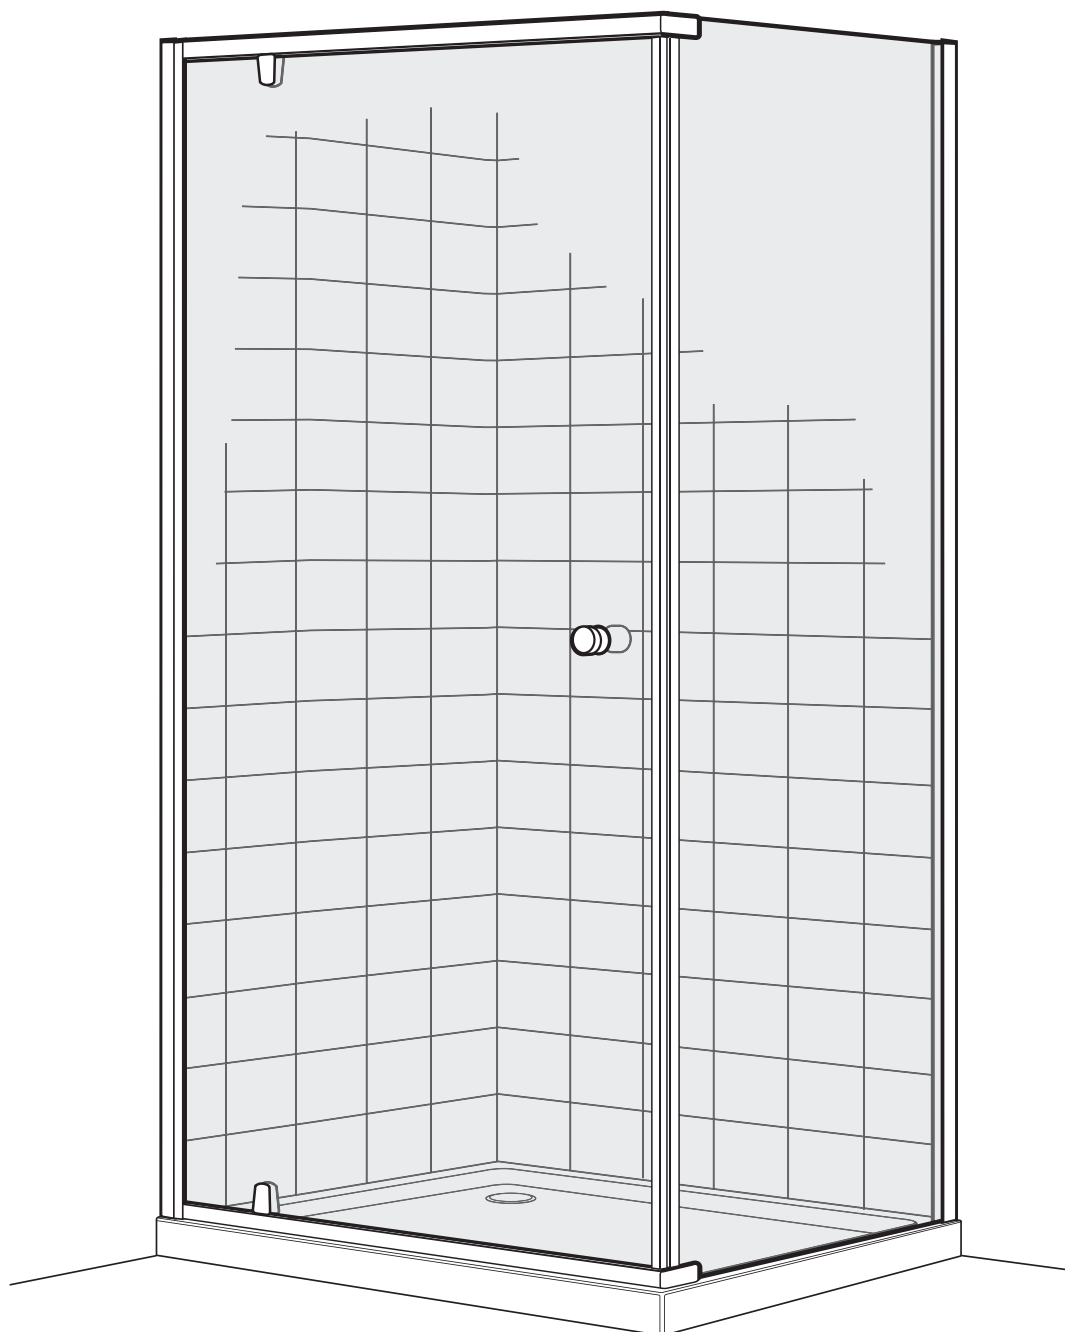

Fitting Instructions

Introduction

The following pages aim to provide comprehensive installation instructions, plus advice on how to care and maintain your product.

We recommend that the unit is installed by a qualified Plumber or Engineer.

Please retain these instructions for future reference.



Safety Precautions

Caution: Care should be taken when drilling into walls and floors to avoid any hidden pipes or wires.

We strongly recommend that all glass panels are moved by a minimum of two people and that any protective packaging along the glass edges is kept in place for as long as possible to prevent damage before installation.



Wear protective footwear when lifting panels



Wear safety glasses when drilling

People not familiar with the fitting of Mira products may require the assistance from another person at certain stages of the procedure. We have indicated these points in the process with the Caution Symbol.



Caution


Care & Maintenance

The unit should be wiped down immediately after each use.

Use a non abrasive cleaner with a pH value between 4 & 8, applied with a soft cloth. A 50:50 solution of vinegar & water can be used on lime scale deposits, rinsing off thoroughly after use. Do not use alkalis such as caustic soda.

Under no circumstances should scourers or powerful detergents be used as these can damage the metallic surface of the frame and the surface of the tray or bath.

If fitted correctly the unit should not require any maintenance other than cleaning. If problems do occur contact the Mira Enclosures Technical Helpline Tel: 0844 571 5000

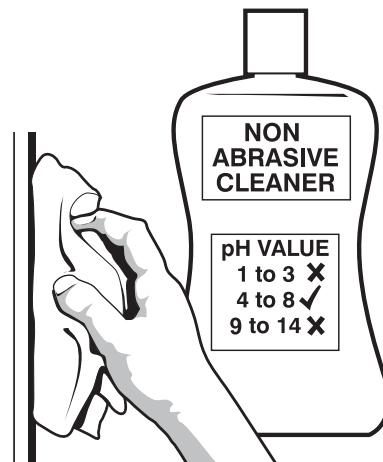

Guarantee

For domestic installations, Mira Showers guarantee this shower enclosure against any defect in materials or workmanship for a period of ten years from the date of purchase.

For non-domestic installations, Mira Showers guarantee this shower enclosure against any defect in materials or workmanship for a period of one year from the date of purchase.


For Terms and Conditions refer to the page opposite.

Recommended Usage	Domestic ✓
	Light Commercial ✓
	Heavy Commercial ×
	Healthcare ×












Components

IMPORTANT

Do not remove the panel wall channel or transit clamps until the door has been fitted to the tray.

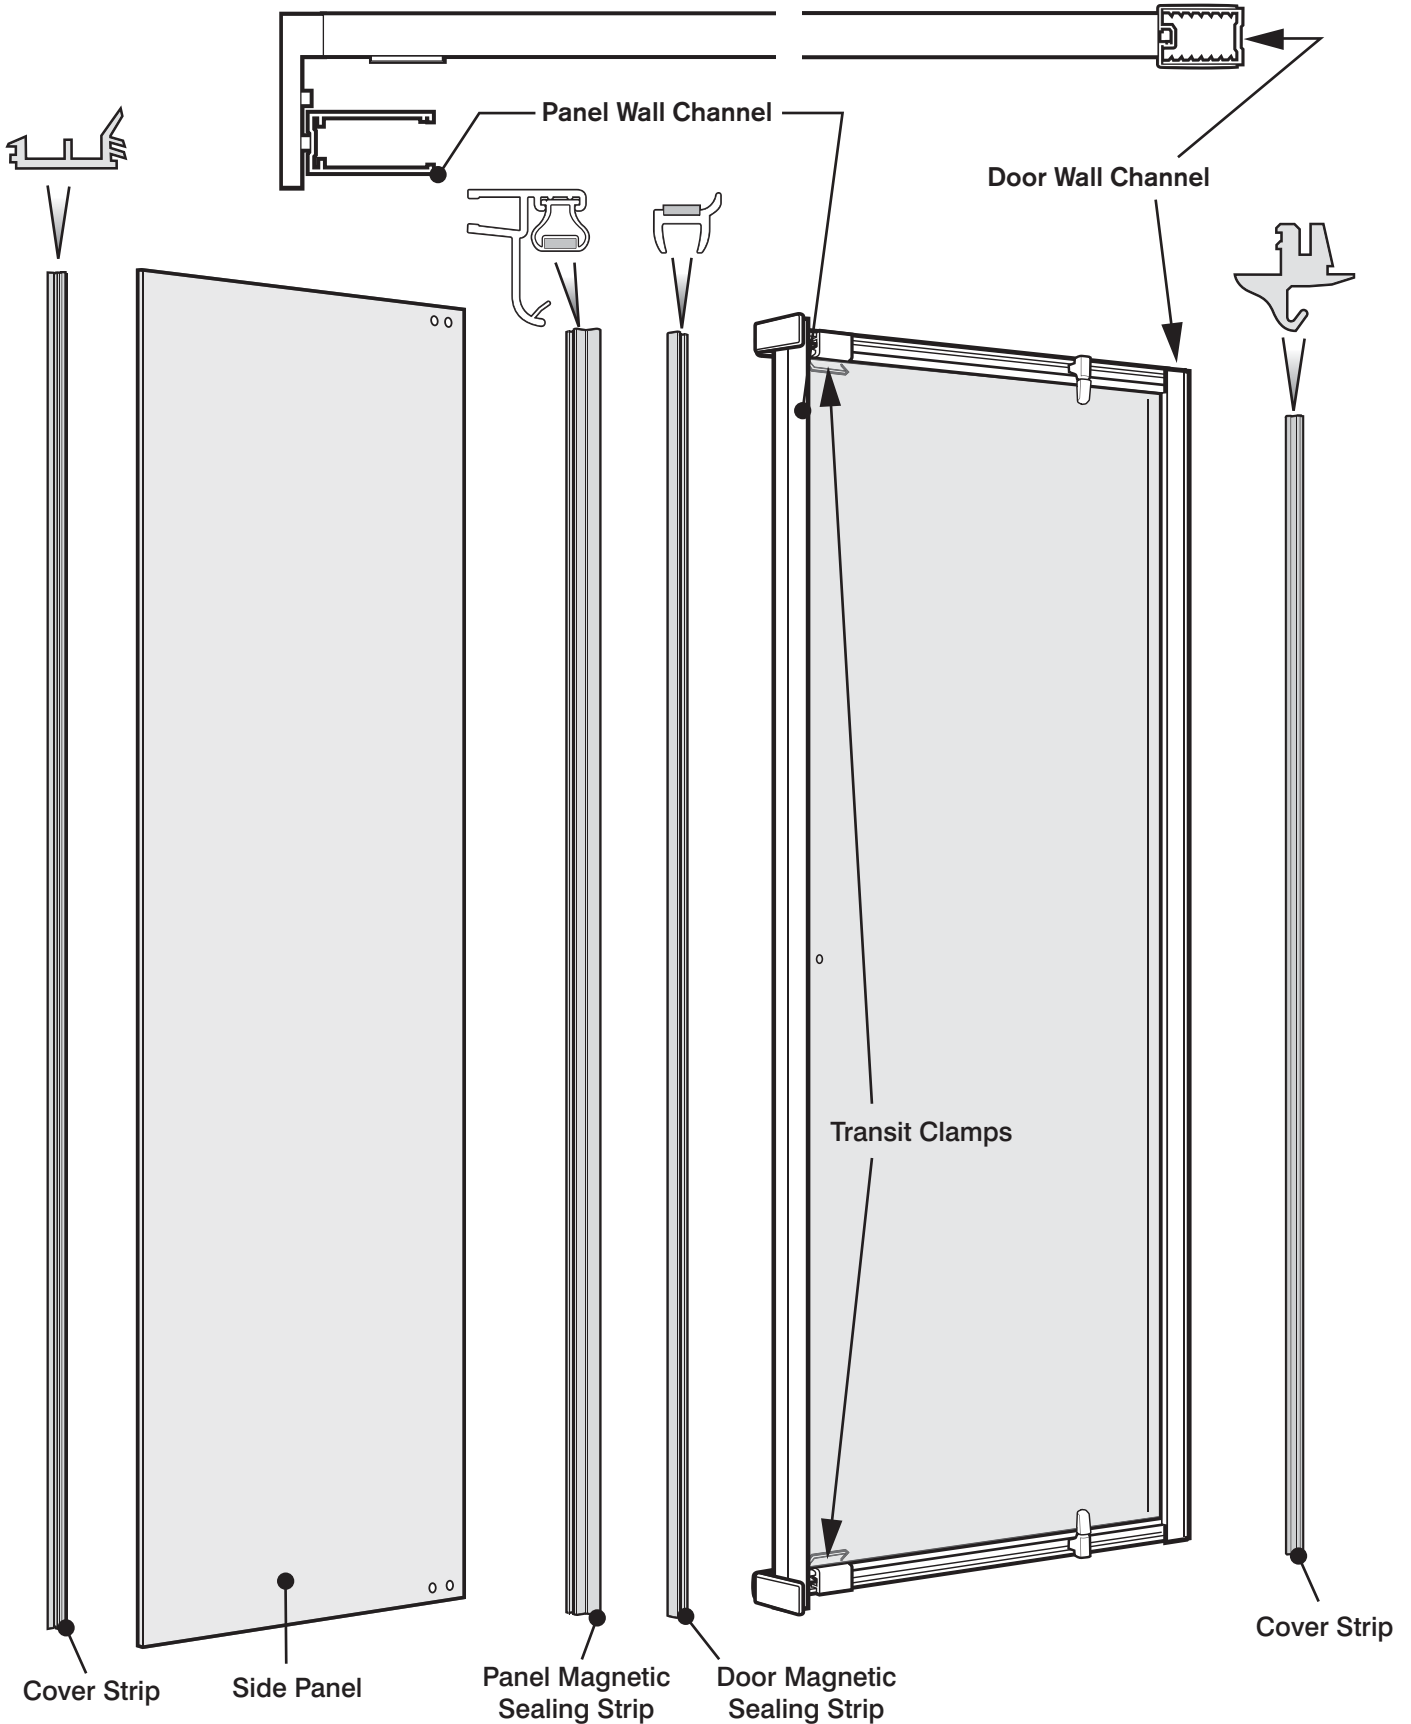

Before installation check that all components are correctly supplied.
If any parts are missing please ring the helpline. Tel: 0844 571 5000

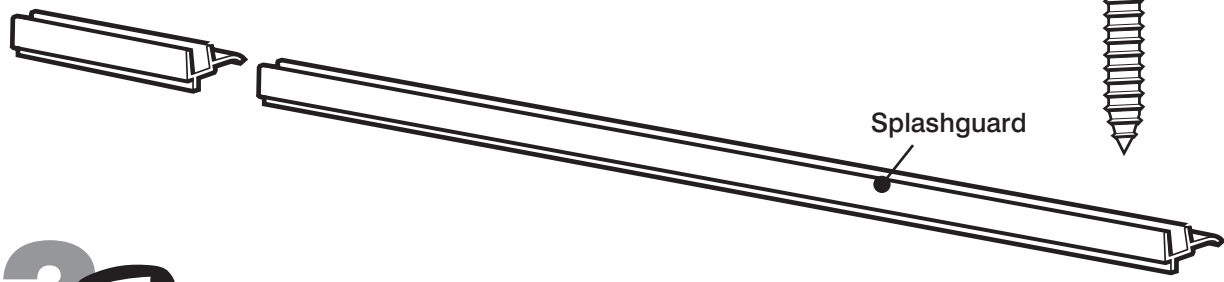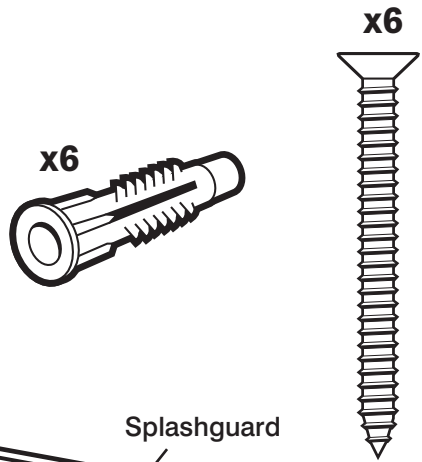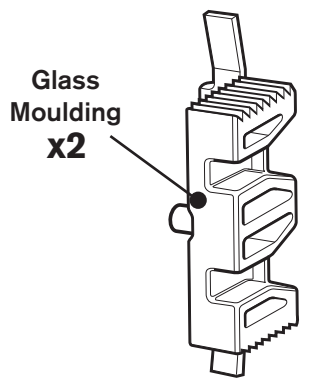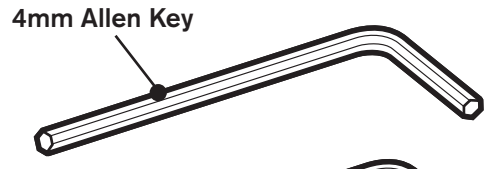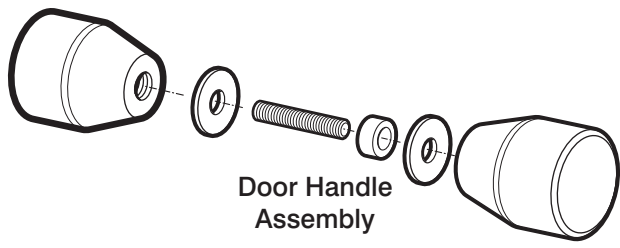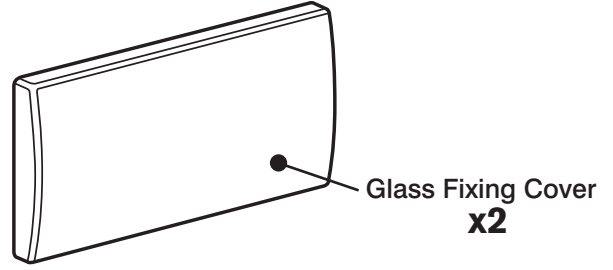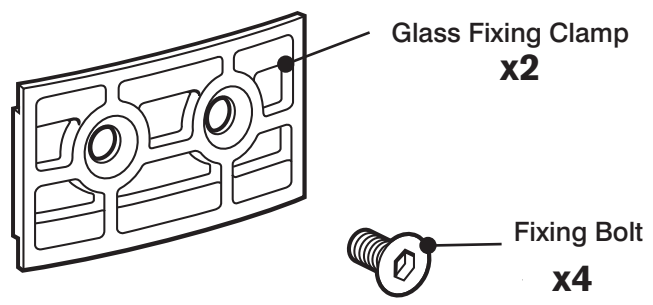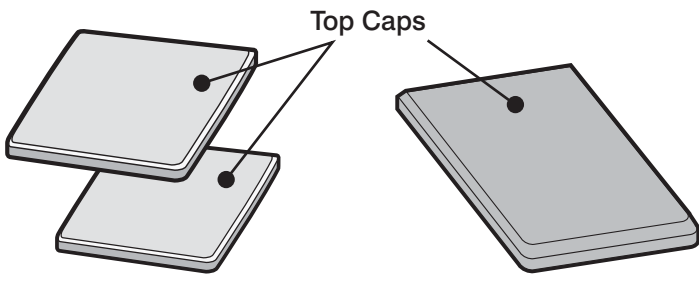

0844 571 5000

Fit tray and then tile walls before fitting the unit.


NOTE

Unit is reversible. RH fitting shown. LH fitting is a mirror image of these instructions.

DOOR SIDE

The door must be installed with the pivot by the wall, not the side panel.


Mark wall 11mm in from edge of tray.

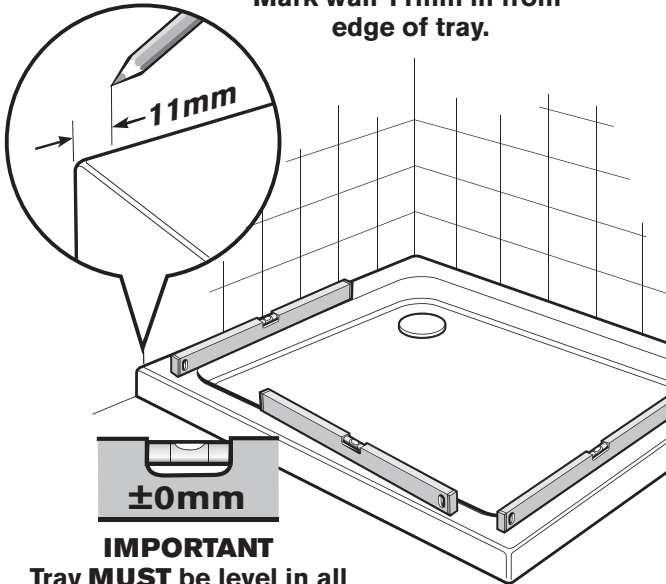

IMPORTANT
Tray **MUST** be level in all planes or the unit will not install properly.

STEP 1

Carefully lay the door on a soft horizontal surface. Remove the tape from the transit clamps.

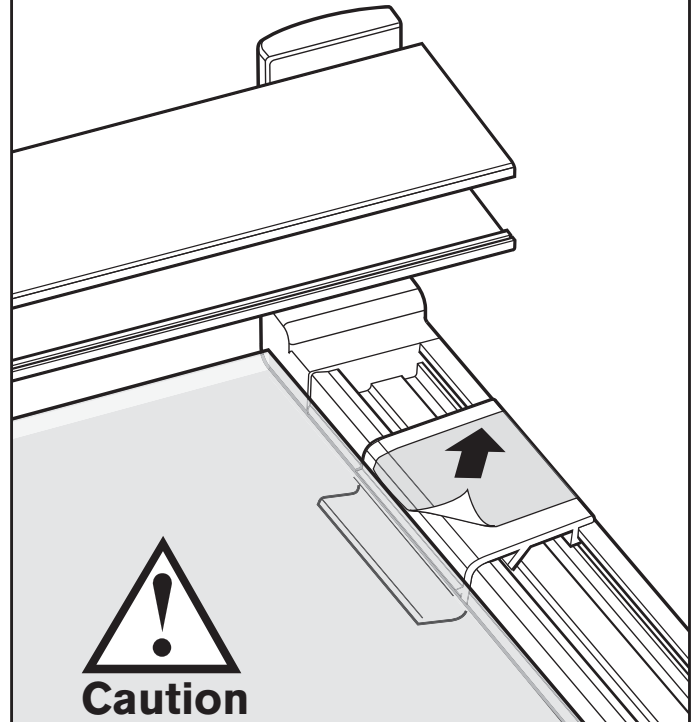


Caution

STEP 2


Unit Size	Frame Adjustment
762mm	729mm to 758mm
800mm	769mm to 798mm
900mm	869mm to 898mm

Carefully pull the door wall channel from the wall jamb.


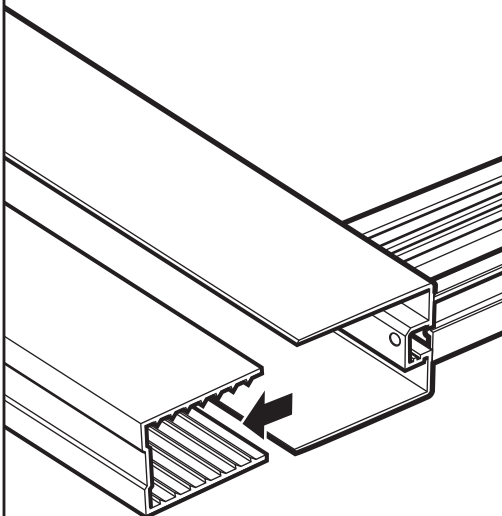


STEP 3

DOOR SIDE: Fit the door wall channel to the wall.




Wall channel **MUST** be vertical on the front face.

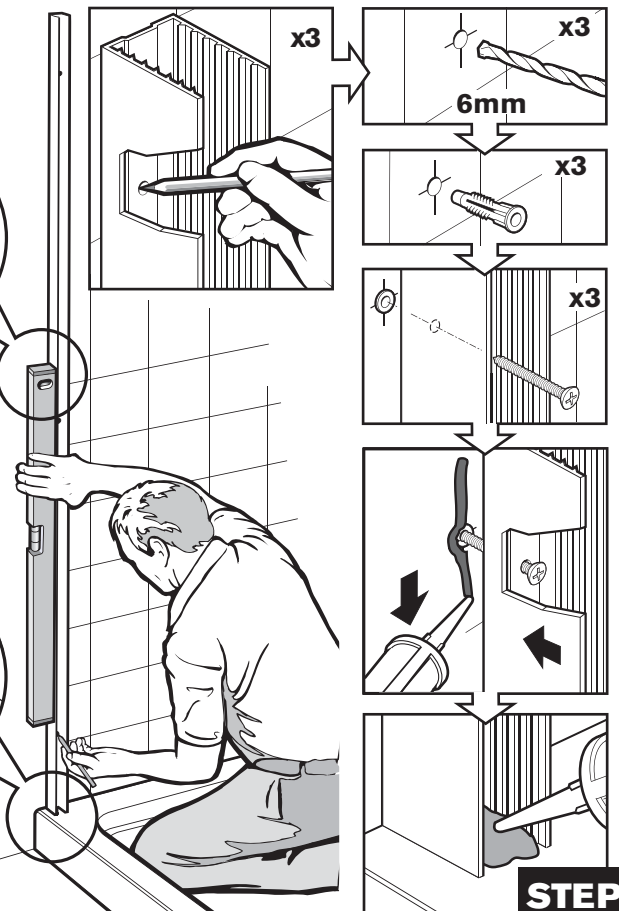

STEP 4

Carefully lift the door assembly into place.

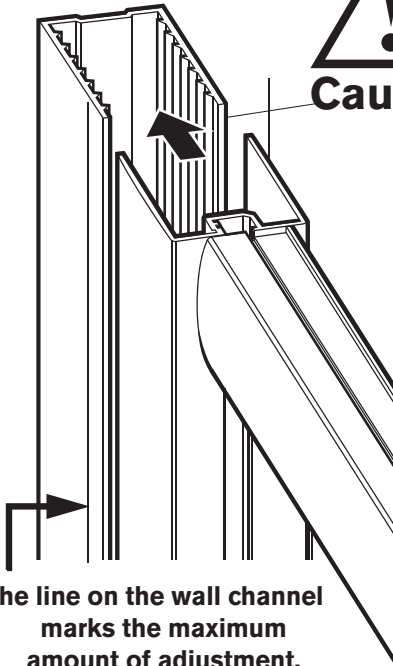


The line on the wall channel marks the maximum amount of adjustment. When fitted this line **MUST NOT** be visible outside the wall jamb.

STEP 5

Unscrew the bolts top and bottom and remove the panel wall channel.


IMPORTANT
Leave the transit clamps in place to support the door assembly.

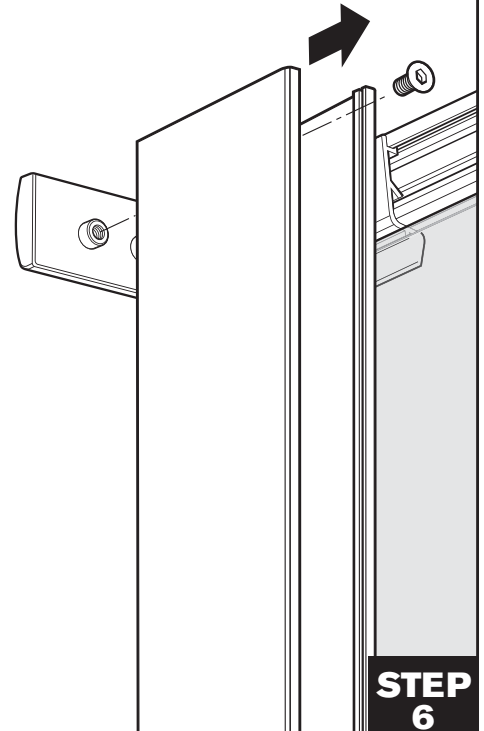

STEP 6

PANEL SIDE


Mark wall 22mm in from edge of tray.

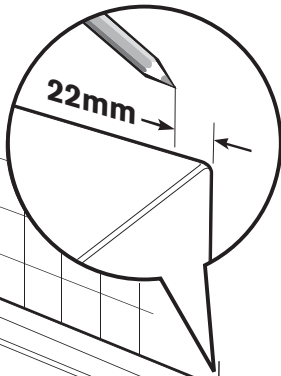


STEP 7

PANEL SIDE: Fit the panel wall channel to the wall.

Note:
Fixing block must be on the inside edge of the wall channel.

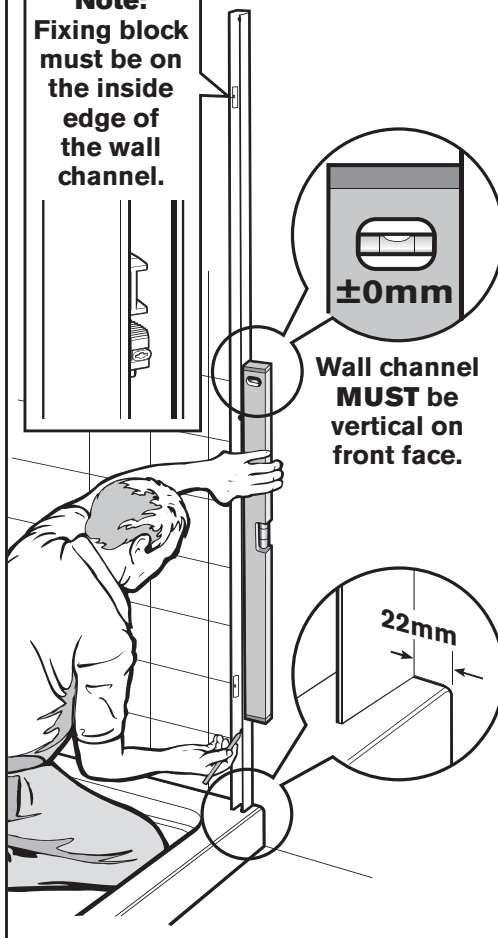


Wall channel **MUST** be vertical on front face.

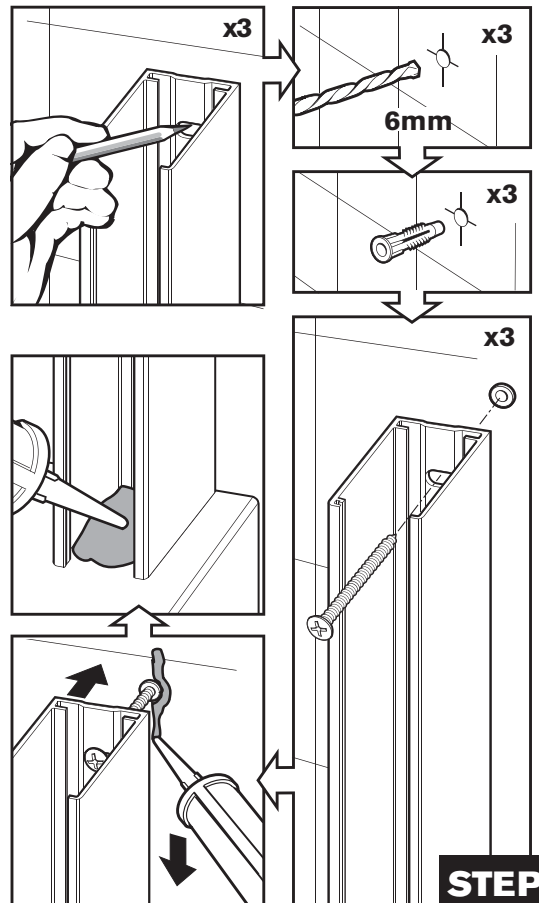


STEP 8

Break one spacer in half.

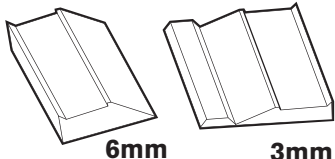


6mm 3mm

Place the 3mm section into the base of the wall channel (Use the 6mm section or omit the spacer if the tray is not perfectly level).

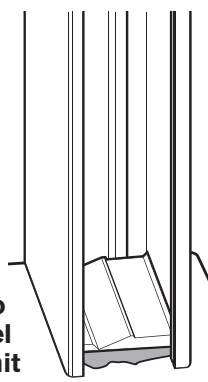


Fit the two glass mouldings to the INSIDE of the side panel.

Push the tabs 'A' against the edge of the glass then push the pin into the hole in the glass 'B' until the moulding snaps into place.

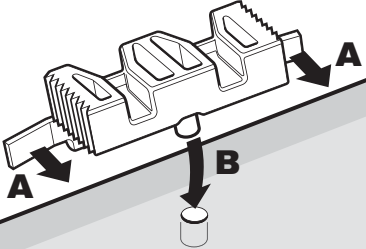

STEP 9


Have a person stand inside the enclosure. Carefully lift the panel into place.

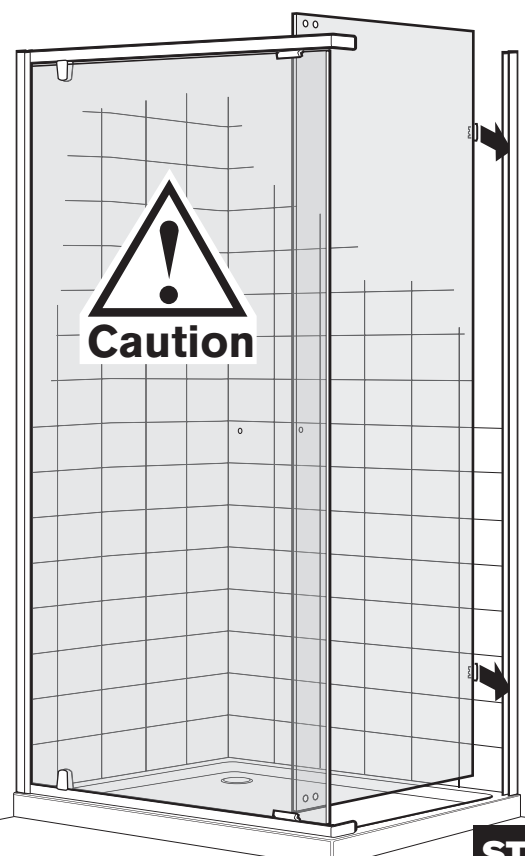

Caution


STEP 10

Carefully slide the panel into the wall channel. Engage the mouldings but do not lock into place at this moment.

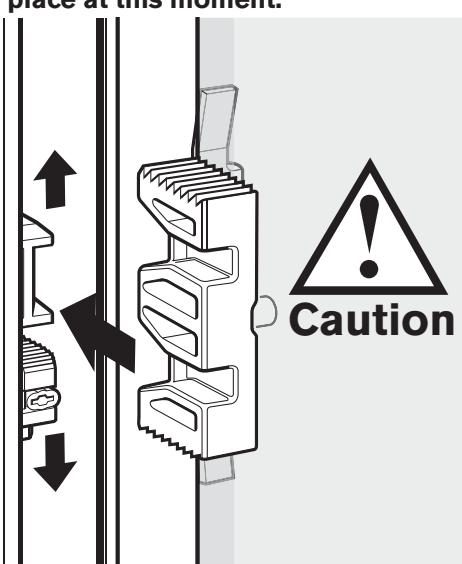

Note: Assembly is aided by tilting the panel and moving the fixing blocks up or down in the wall channel.


Caution

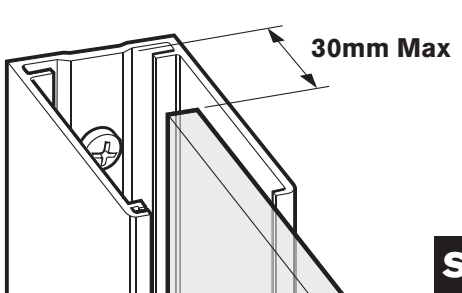

30mm Max

STEP 11


Fix the panel to the door at top and bottom.
Note: The holes in the glass are larger than the mounting blocks. Centre the glass on blocks when fitting.

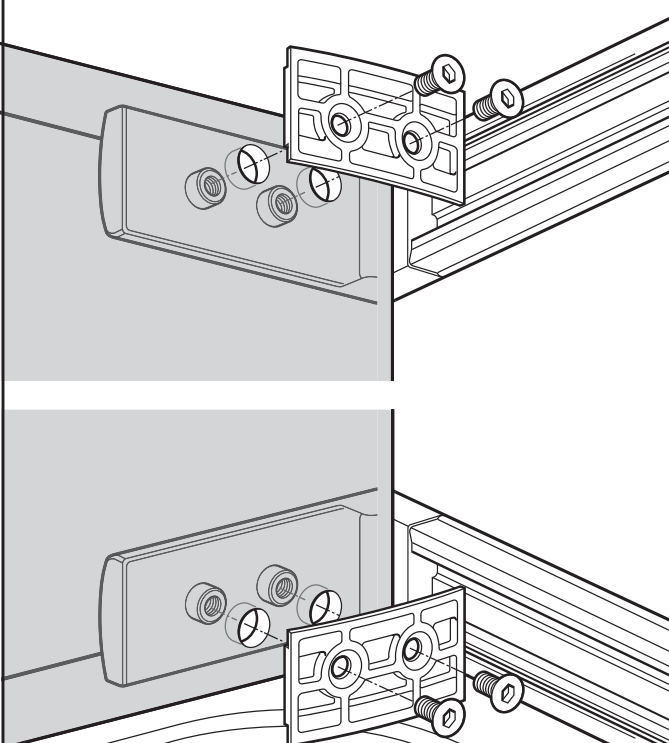


STEP 12

Check that the door and panel are far enough into the wall channels to lock securely (See Step 11).
Adjust if required.


Lock the panel into the wall channel by turning the cam through 90°.

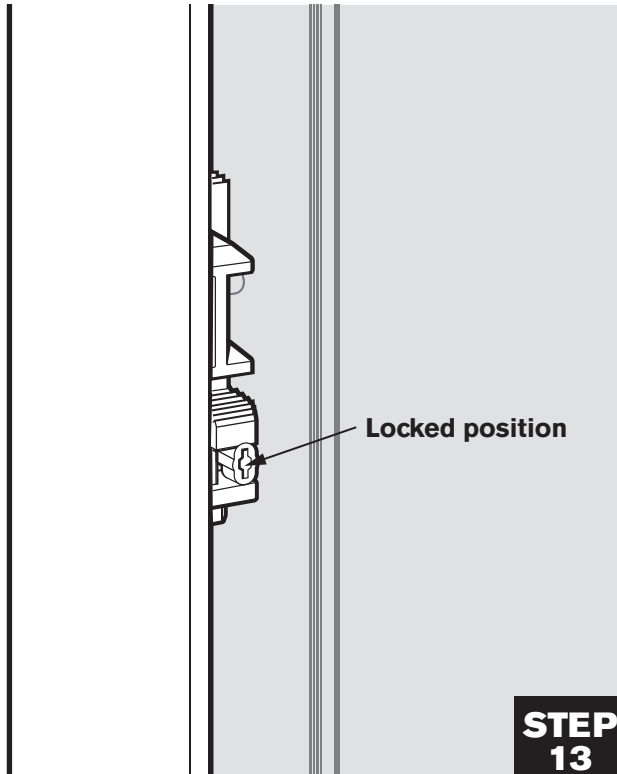


Carefully pull the transit clamp away from the track and door.

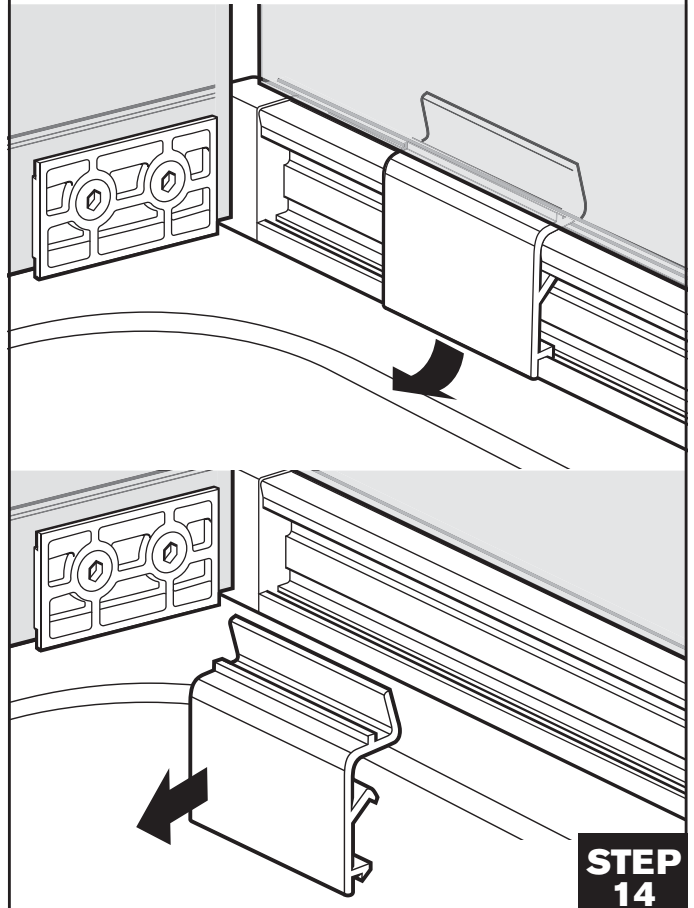


On the door side turn the adjusters through 90° to lock the door assembly to the wall channel.

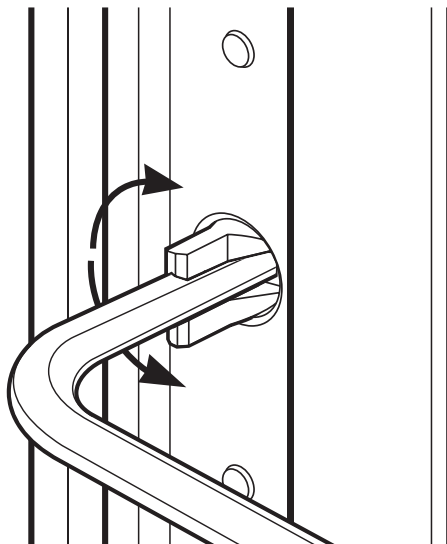

Unlocked




Locked



STEP 15

If the tray has been fitted level the gap under the glass panel should be 3mm along its length and the bottom track should be on the tray.

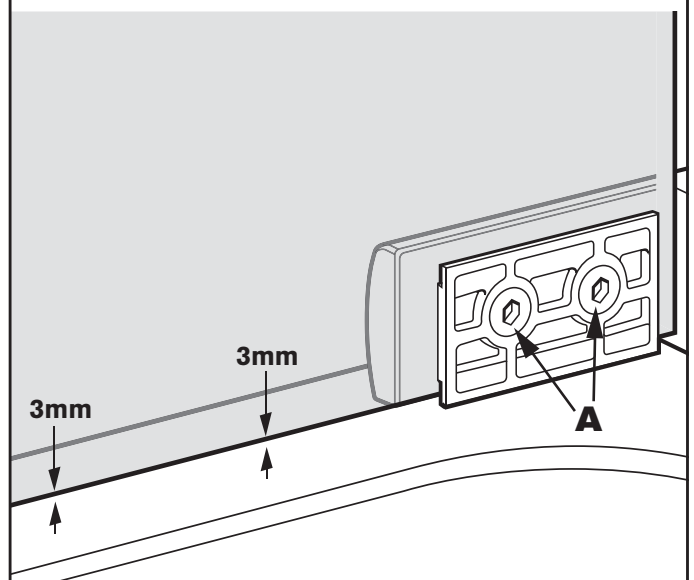


The position of the door can be adjusted by loosening the fixing screws 'A' and undoing the locks in the wall channels. The whole assembly can be moved to the correct position.


Tighten the screws and wall channel locks when adjustment is complete.

STEP 16


For 762 & 800 enclosures, cut the splashguard to the correct length.

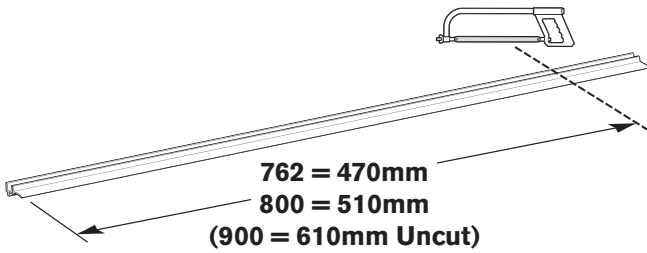

Fit splashguards to the underside of the door. The splashguard lip should face inside the enclosure.

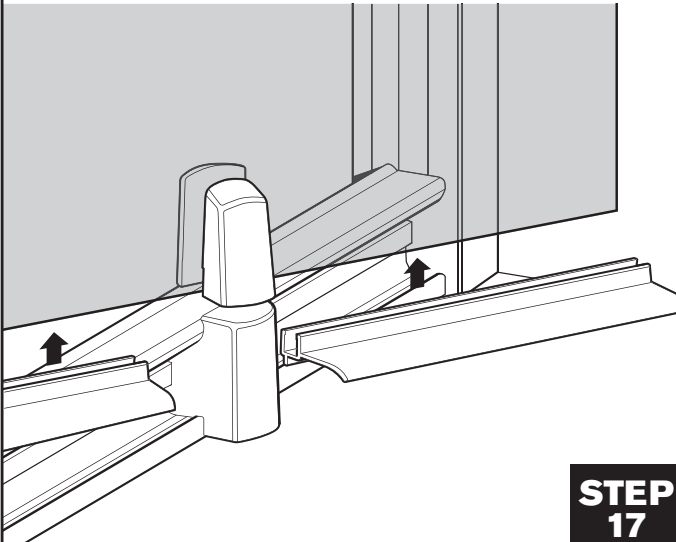

Fit the seals to the side of the door and the side of the panel.

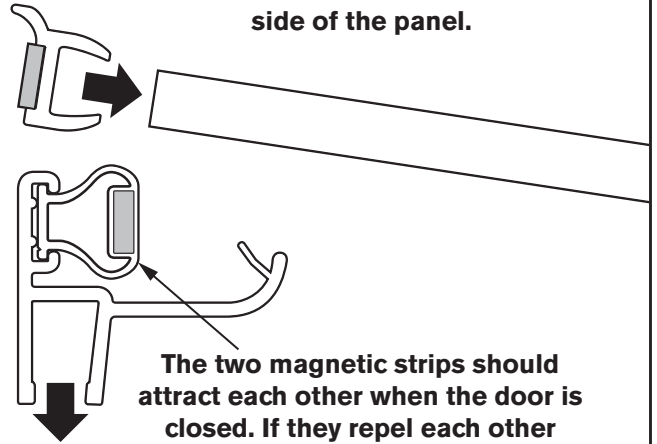

The two magnetic strips should attract each other when the door is closed. If they repel each other remove the strip from its fitting in the panel seal, turn it through 180° and then refit.


When the door is closed the magnetic strips should touch along their length.

STEP 18


Fit the cover strip to the wall jamb.





Note:

The cover strip may need cutting to the correct length, but do not stretch when fitting.

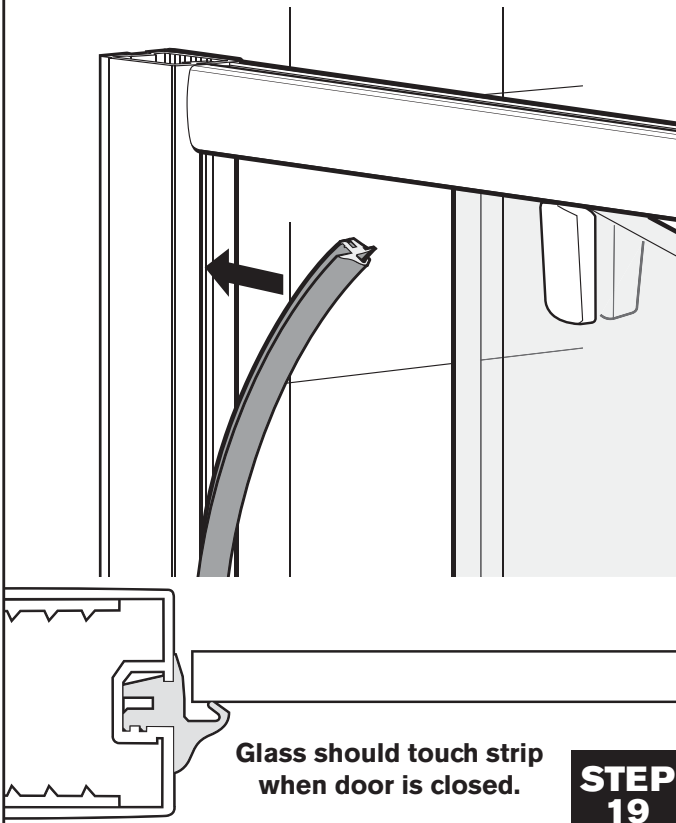


Fit the cover strip to the panel wall channel. Start at the bottom and tap into place with a block of wood or similar.

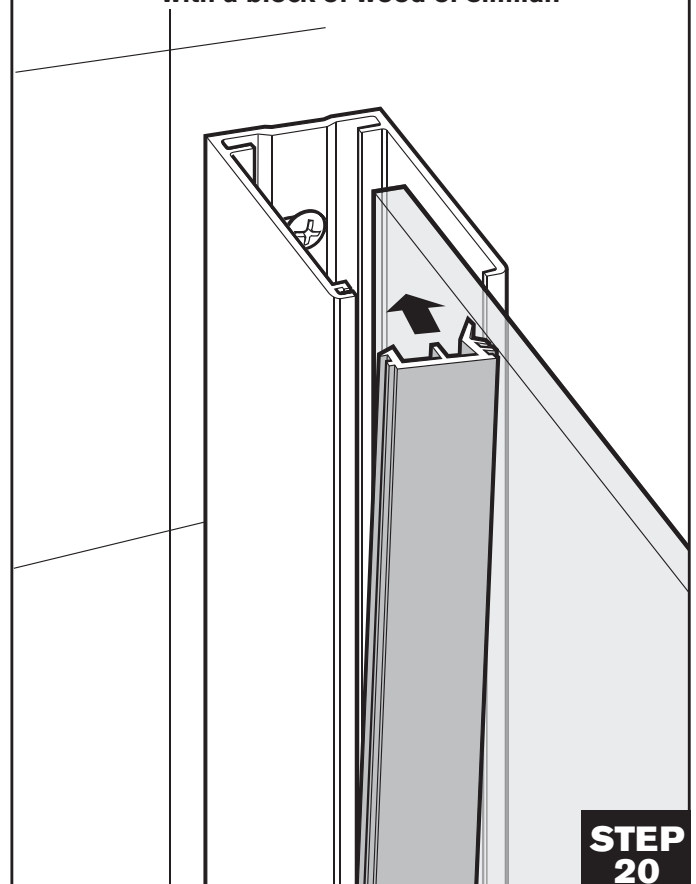


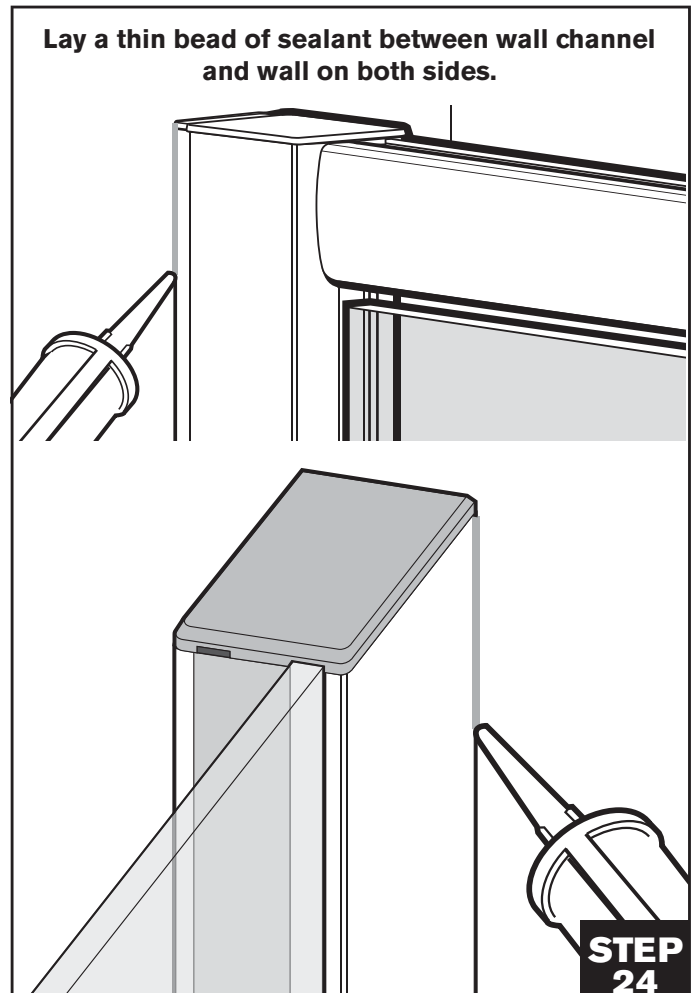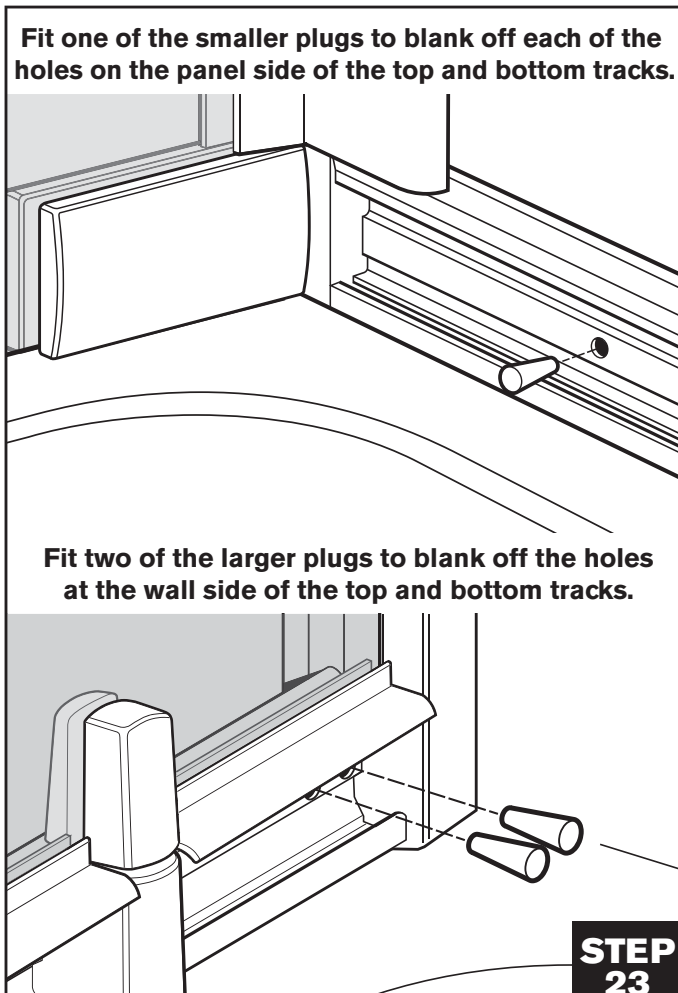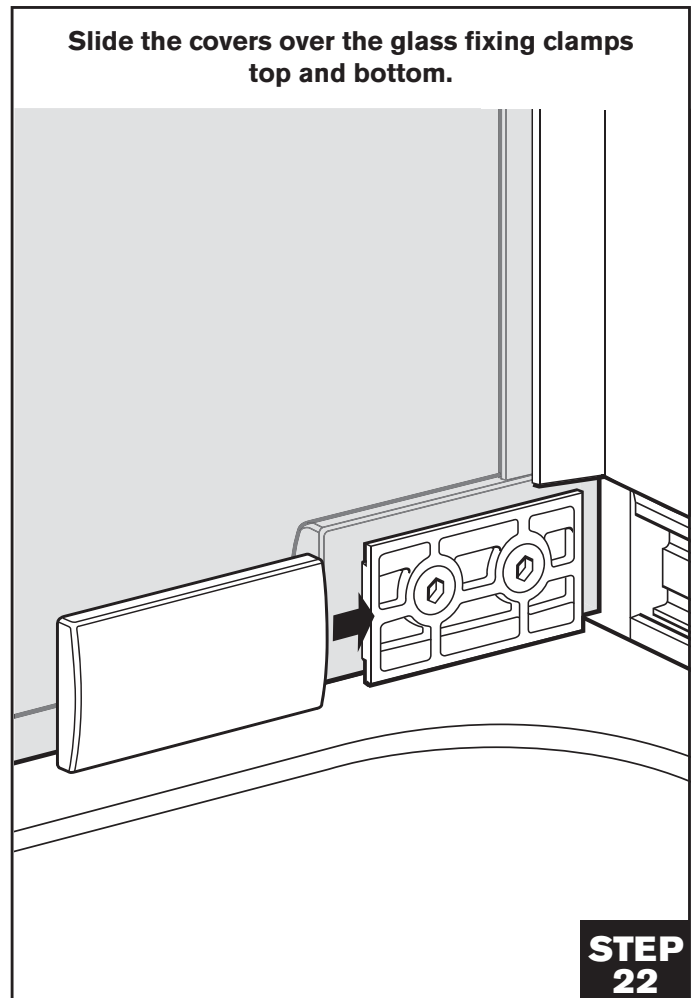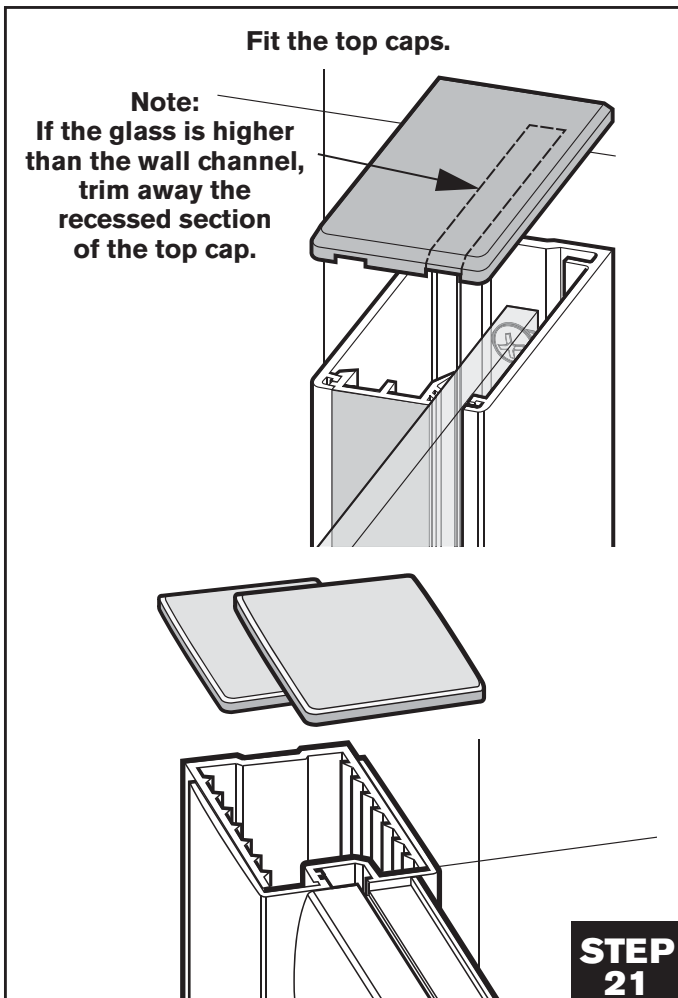

Lay a thin bead of sealant along the bottom of track and fill the gap between the glass and tray on the outside of the enclosure.

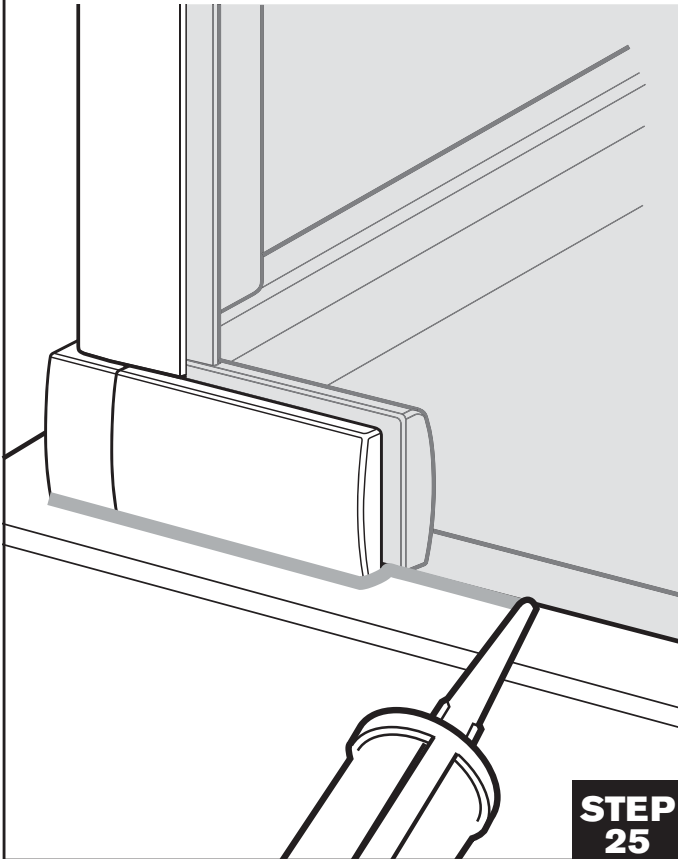

Fit the door handle.

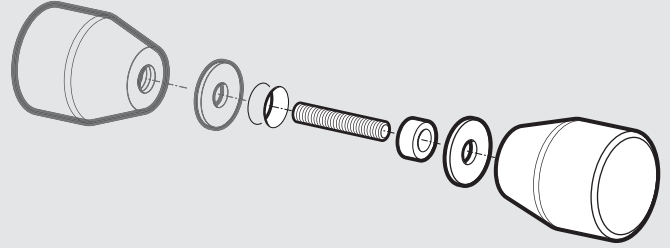


Do not use the enclosure for at least 24 hours.



STEP 26

Spare Parts

EX71 (Mira 762 800 900)-2

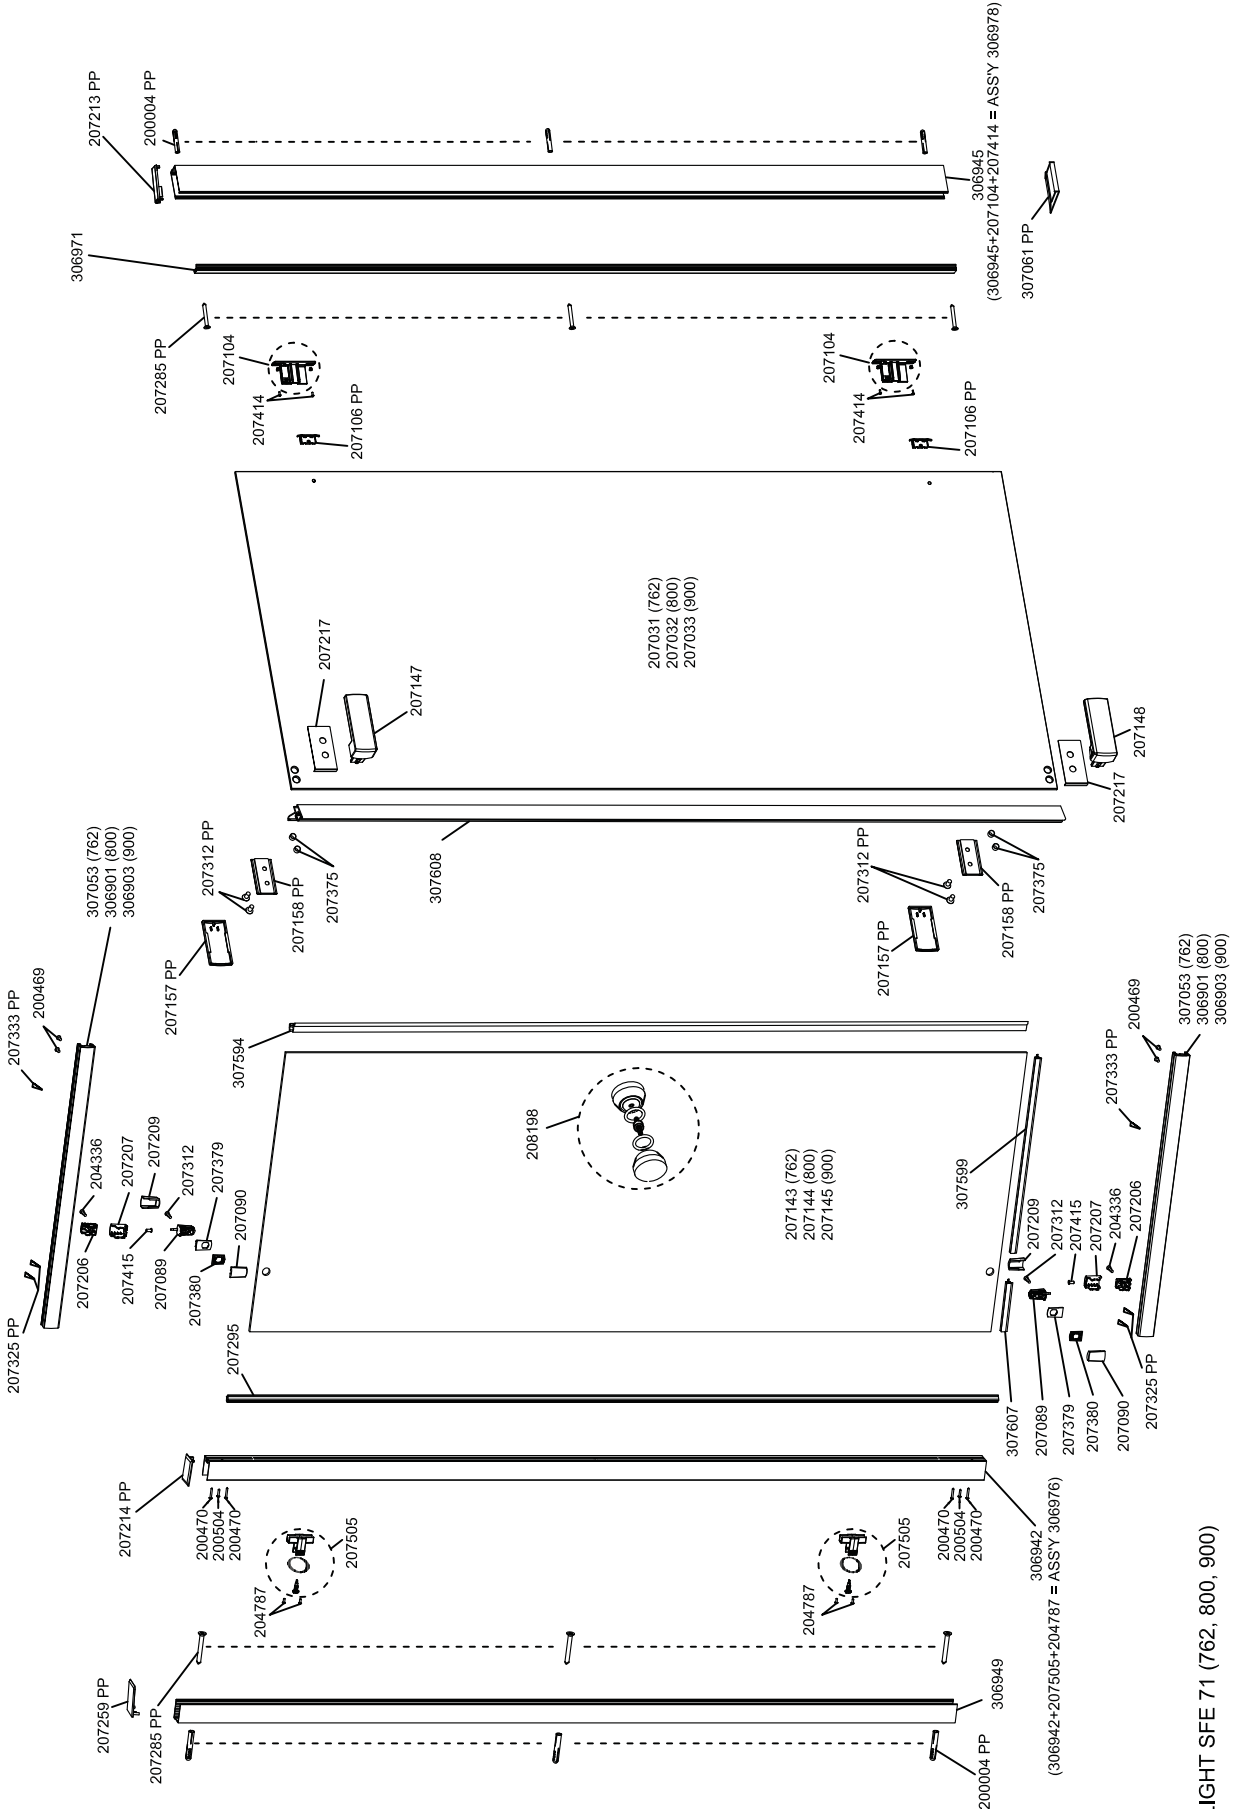

MIRA FLIGHT SFE 71 (762, 800, 900)
 To ensure correct replacement parts are sent be ready to quote the six digit code from this drawing e.g. 304781
 PP after a part means it is contained in the parts pack

Guarantee of Quality

Mira Showers guarantee your product against any defect in materials or workmanship, provided that it is installed and maintained in accordance with the instructions given in this guide. To validate the guarantee, please return your completed registration card within 30 days of product installation. Within the guarantee period we will resolve defects, free of charge, by repairing or replacing parts or modules as we may choose. To be free of charge, service work must only be undertaken by Mira Showers or our approved agents. Service under this guarantee does not affect the expiry date of the guarantee. The guarantee on any exchanged parts or product ends when the normal product guarantee period expires.

Not covered by this guarantee:

Damage or defects arising from incorrect installation, improper use or lack of maintenance, including build-up of limescale. Damage or defects if the product is taken apart, repaired or modified by any persons not authorised by Mira Showers or our approved agents. This guarantee is in addition to your statutory and other legal rights.

What to do if something goes wrong

If when you first use your enclosure, it does not function correctly, first contact your installer to check that installation is satisfactory and in accordance with the instructions in this manual. We are on hand to offer you or your installer any advice you may need. Should this not resolve the difficulty, simply contact our Customer Services Team who will give every assistance and, if necessary, arrange for our service engineer to visit. If the operation of your enclosure declines, please call our Customer Services Team to talk the difficulty through, request a service under guarantee if applicable, or take advantage of our comprehensive After-Sales service. As part of our quality and training programme calls may be recorded or monitored. Our Customer Services Team is comprehensively trained to provide every assistance you may need: help and advice, spare parts or a service visit.

Spare Parts

We maintain an extensive stock of spares and aim to provide support throughout the product's expected life. Genuine Mira spares can be purchased direct from Customer Services. Spare parts will normally be despatched within three to five working days. Payment can be made using most major Credit or Debit cards at the time of ordering. Should payment by cheque be preferred, a pro-forma invoice will be sent. All spares are guaranteed for 12 months from the date of purchase.

Service / Repairs

Our Service Force is available to provide a quality service at a reasonable cost. You will have the assurance of a Mira trained engineer/agent, genuine Mira spare parts and a 12 month guarantee on the repair. Payment should be made directly to the engineer via cheque on the day, alternatively an invoice will be sent after the visit if you would prefer to pay via credit or debit card.

To Contact Us

England, Scotland, Wales and Northern Ireland:

Mira Enclosures Technical Helpline

Telephone: 0844 571 5000 Mon to Fri 8:00 am - 5:30 pm

Sat 8.30 am - 3.30 pm

E-mail: technical@mirashowers.com

Fax: 01242 282595

Post: Cromwell Road, Cheltenham, Gloucestershire, GL52 5EP

Mira is a registered trade mark of Kohler Mira Limited.

The company reserves the right to alter product specifications without notice.

www.mirashowers.co.uk

mira
SHOWERS



FM 14648