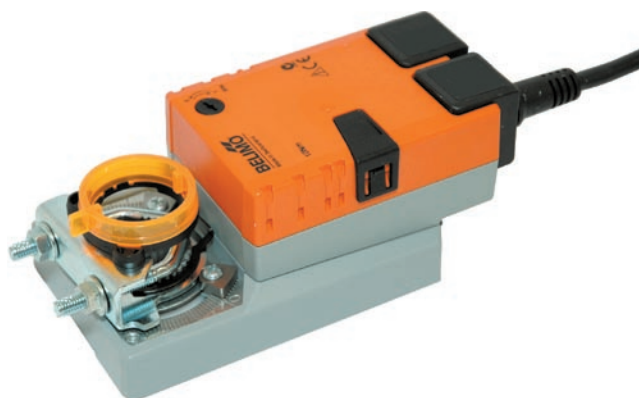


Damper actuator for operating air control dampers in ventilation and air-conditioning systems for building services installations

- For air dampers up to approx. 2 m²
- Torque 10 Nm
- Nominal voltage DC 48 ... 110 V
- Control: Open-close or 3-point


Technical data

Electrical data	Nominal voltage	DC 48 ... 110 V
	Nominal voltage range	DC 33.6 ... 140 V (IEC/EN) / DC 33.6 ... 121 V (UL)
	Power consumption	In operation 3.5 W @ nominal torque At rest 2 W For wire sizing 3.5 VA
	Connection	Cable 1 m, 3 x 0.75 mm ²
Functional data	Torque (nominal torque)	Min. 10 Nm @ nominal voltage
	Direction of rotation	Reversible with switch 0 ↺ resp. 1 ↻
	Manual override	Gearing latch disengaged with pushbutton, can be locked
	Angle of rotation	Max. 95°↔, limited on both sides by means of adjustable, mechanical end stops
	Running time	150 s / 90°↔
	Sound power level	Max. 35 dB (A)
	Position indication	Mechanical, pluggable
Safety	Protection class	II Totally insulated <input type="checkbox"/>
	Degree of protection	IP54 in any mounting position
	EMC	CE according to 2004/108/EC
	Low-voltage directive	CE according to 2006/95/EC
	Certification	cULus according to UL 60730-1A and UL 60730-2-14 and CAN/CSA E60730-01:02 Certified to IEC/EN 60730-1 and IEC/EN 60730-2-14
	Mode of operation	Type 1
	Rated impulse voltage	2.5 kV
	Control pollution degree	3
	Ambient temperature	-30 ... +50 °C
	Non-operating temperature	-40 ... +80 °C
Ambient humidity	95% r.H., non-condensating	
Maintenance	Maintenance-free	
Dimensions / Weight	Dimensions	See «Dimensions» on page 2
	Weight	Approx. 950 g

Safety notes


- This actuator is not allowed to be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- Caution: Low voltage max. 140 V
- It may only be installed by suitably trained personnel. Any legal regulations or regulations issued by authorities must be observed during assembly.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- The cable must not be removed from the device.
- When calculating the required torque, the specifications supplied by the damper manufacturers (cross section, design, installation site), and the air flow conditions must be observed.
- The device contains electrical and electronic components and is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Product features

- Simple direct mounting** Simple direct mounting on the damper spindle with a universal spindle clamp, supplied with an anti-rotation strap to prevent the actuator from rotating.
- Manual override** Manual override with push-button possible (the gear is disengaged for as long as the button is pressed or remains locked).
- Adjustable angle of rotation** Adjustable angle of rotation with mechanical end stops.
- High functional reliability** The actuator is overload-proof, requires no limit switches and automatically stops when the end stop is reached.

Accessories

	Description	Data sheet
Electrical accessories	Auxiliary switch S..A..	T2 - S..A..
	Feedback potentiometer P..A..	T2 - P..A..
Mechanical accessories	Various accessories (clamps, shaft extensions etc.)	T2 - Z-NM..A..

Electrical installation

Wiring diagrams

Note

- Caution: Low voltage max. 140 V
- Other actuators can be connected in parallel.


Note the performance data.




Direction of rotation



Open-close control




3-point control



Dimensions [mm]







Dimensional drawings


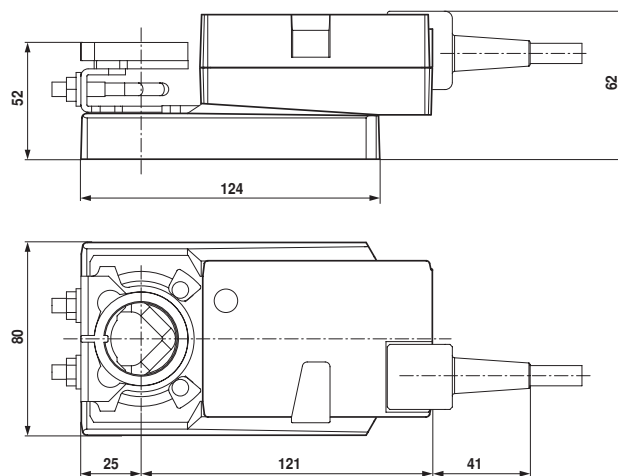


Damper spindle	Length	⊙	⊠	◇
	≥40	8 ... 26.7	≥8	≤26.7
	≥20	8 ... 20	≥8	≤20




* Option (accessory K-NA)

70214-00002.D

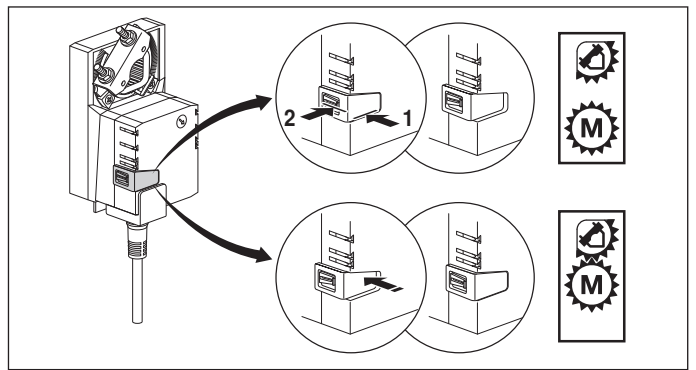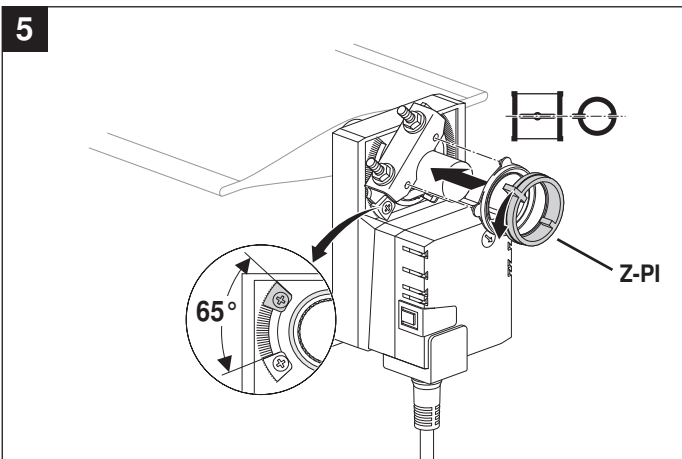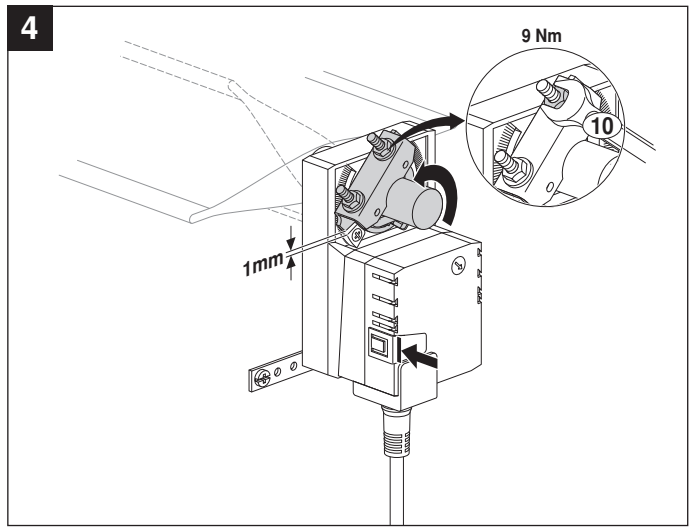
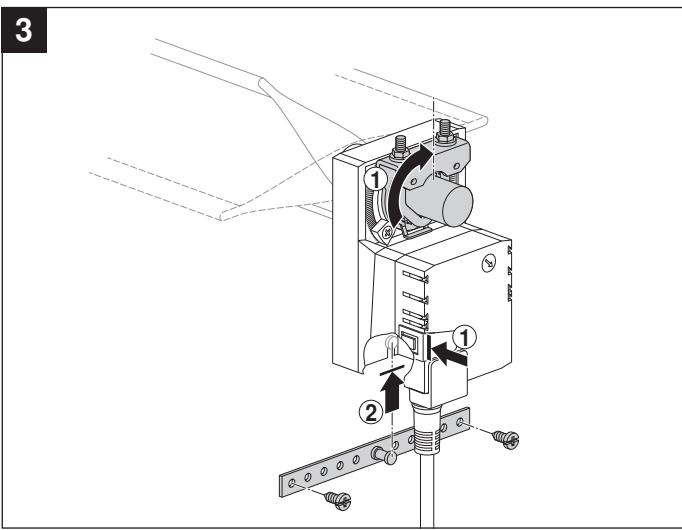
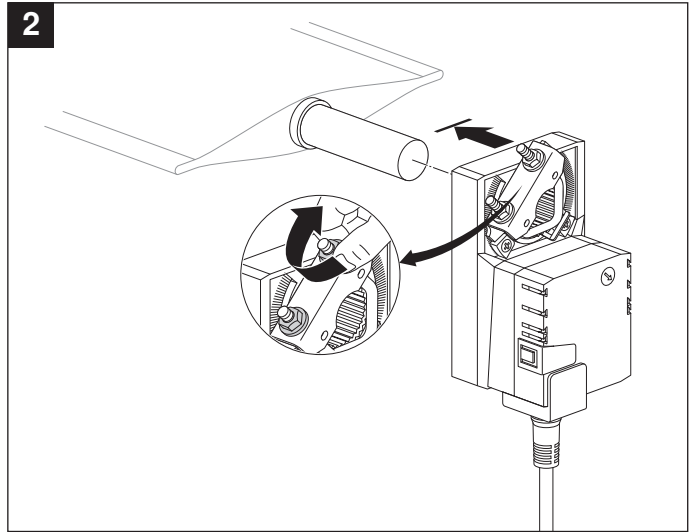
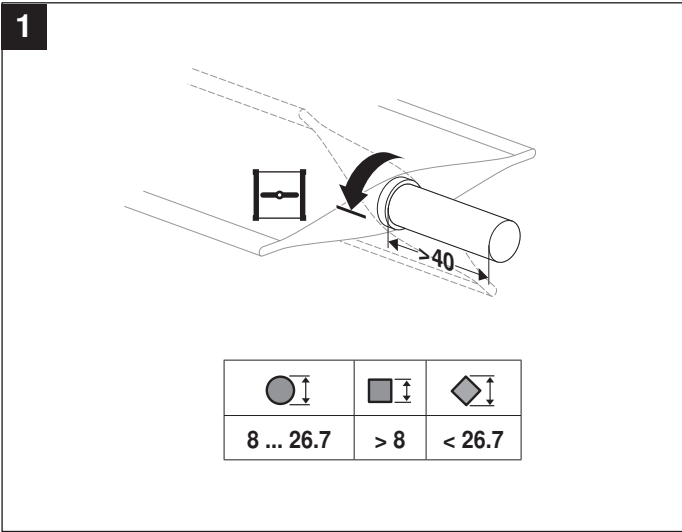






AC 24 V / DC 24 V
DC 48 ... 110 V
(NM72A..) ⚠




AC 100 ... 240 V ⚠




AC 24 V / DC 24 V

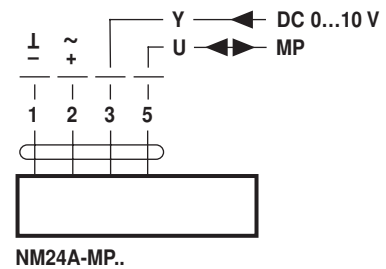

DC 48 ... 110 V
(NM72A-SR..) ⚠

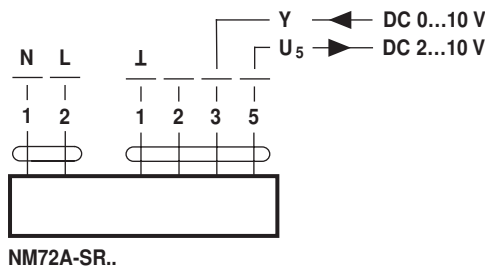

AC 100 ... 240 V ⚠

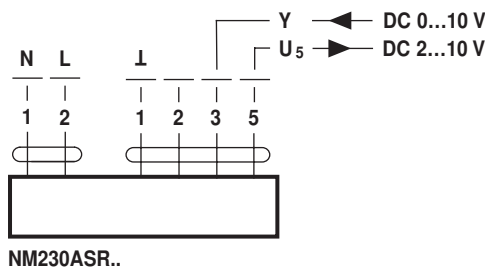

AC 24 V / DC 24 V
(NM24A-V / VR..) ⚠

