

Open-close ball valves, 3-way,  
with external thread

- for open and closed cold and warm water systems
- For switching functions on the water side and 2-point controls in air-handling and heating systems
- air bubble-tight (control path A – AB)


**Type overview**

Type	$k_{vs}$ [m <sup>3</sup> /h]	DN [mm]	G [Inches]	$p_s$ [kPa]
R515	8.6	15	1"	4140
R520	21	20	1 1/4"	4140
R525	26	25	1 1/2"	4140
R530	16	32	2"	4140
R532	32	32	2"	2760
R540	32	40	2 1/4"	2760
R550	49	50	2 3/4"	2760

**Technical data**

<b>Functional data</b>	Flow media	Cold and hot water, water with max. 50% volume of glycol
	Temperature of medium	+5 °C ... +110 °C <sup>1)</sup> (lower or higher temperatures on request)
	Rated pressure $p_s$	see «Type overview»
	Flow rate	Bypass B – AB: approx. 50% of $k_{vs}$ value
	Leakage rate	Control path A – AB: Air bubble-tight (BO 1, DIN3230 T3) Bypass B – AB: 1% of $k_{vs}$ value
	Pipe connector	External thread to ISO 228/1
	Differential pressure $\Delta p_{max}$	1000 kPa (200 kPa for low-noise operation)
	Closing pressure $\Delta p_s$	1400 kPa
	Angle of rotation	90 °↔ (Operating range 15 ... 90 °↔)
	Installation position	Upright to horizontal (in relation to the stem)
	Maintenance	Maintenance-free
	<b>Materials</b>	Fitting
Valve cone and stem		Stainless steel
Stem seal		O-Ring, EPDM
Ball seat		PTFE, O-Ring Viton
<b>Dimensions / Weights</b>	see «Dimensions and weights», page 3	
<b>Motorizing</b>	see the complete overview of water solutions	

<sup>1)</sup> The allowed media temperature can be limited, depending on the type of actuator. The correct values can be found in the corresponding actuator data sheets.

**Safety notes**



- The valve has been designed for use in stationary heating, ventilation and air conditioning systems and is not allowed to be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- It may only be installed by suitably trained personnel.  
All applicable legal or institutional installation regulations must be complied with.
- The valve does not contain any parts that can be replaced or repaired by the user.
- The valve is not allowed to be disposed of as household refuse. All locally valid regulations and requirements must be observed.
- The recognized rules should be applied when determining the flow characteristic of final controlling elements.

## Product features

**Mode of operation** The open-close ball valve is operated by a rotary actuator. The rotary actuator is controlled by an open-close signal. Open the ball valve counterclockwise and close it clockwise.

## Installation notes

**Recommended mounting positions** The valve may be mounted either **vertically** or **horizontally**. It is not permissible, mounting the valve with the stem pointing downwards.




**Water quality requirements**

- The water quality requirements specified in VDI 2035 must be adhered to.
- Ball valves are relatively sensitive control devices. In order to ensure a long service life, it is advisable to fit **strainers**.

**Maintenance**

- The ball valves and rotary actuators are maintenance-free.
- Before any kind of service work is carried out on actuator sets of this type, it is essential to isolate the rotary actuator from the power supply (by unplugging the power lead). Any pumps in the part of the piping system concerned must also be switched off and the appropriate isolating fittings closed (allow everything to cool down first if necessary and reduce the pressure in the system to atmospheric).
- The system must not be returned to service until the ball valve and the rotary actuator have been properly reassembled in accordance with the instructions and the pipework has been refilled in the proper manner.

**Direction of flow** The direction of flow, specified by an arrow on the housing, is to be complied with, since otherwise the ball valve can be damaged. Please ensure that the ball is in the correct position.

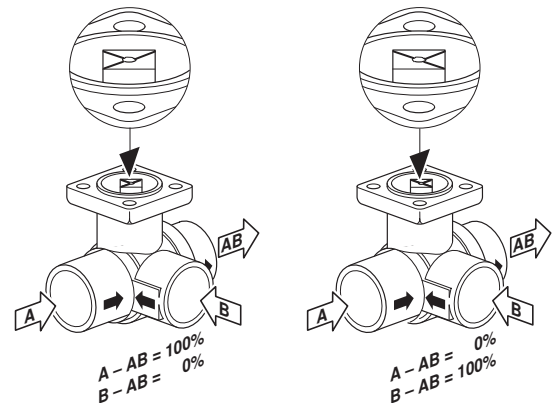


## Accessories

	Description
<b>Mechanical accessories</b>	Stem heating ZR24-1 <sup>1)</sup>
	Pipe connector ZR45..

<sup>1)</sup> No stem heating is available for R530, R540 and R550

## Dimensions and weights

Dimensional drawings

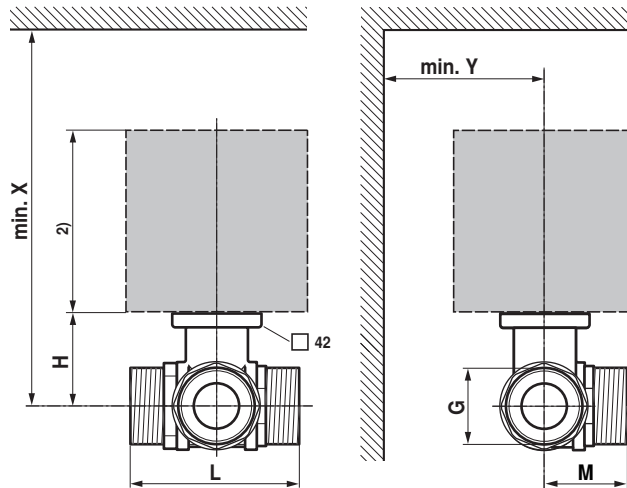

DN [mm]	L [mm]	H [mm]	M [mm]	G [Inches]	X <sup>1)</sup> [mm]	Y <sup>1)</sup> [mm]	Weight [kg]
15	74	44	39	1"	220	90	0.7
20	85.5	46	41.5	1 1/4"	220	90	1.0
25	84.5	46	45	1 1/2"	220	90	1.1
32 R530	97.5	46	55.5	2"	220	90	1.7
32 R532	102	50.5	55.5	2"	230	90	1.8
40	103	50.5	56	2 1/4"	230	90	2.3
50	115.5	56	68	2 3/4"	240	90	3.8

<sup>1)</sup> Minimum distance with respect to the valve centre.

<sup>2)</sup> The actuator dimensions can be found on the respective actuator data sheet.

### Further documentations

- Complete overview «The complete range of water solutions»
- Data sheets for actuators
- Installation instructions for ball valves and/or actuators
- Notes for project planning (hydraulic characteristic curves and circuits, installation regulations, commissioning, maintenance etc.)





R4..(K)






R5..(K)

70167-00001.A

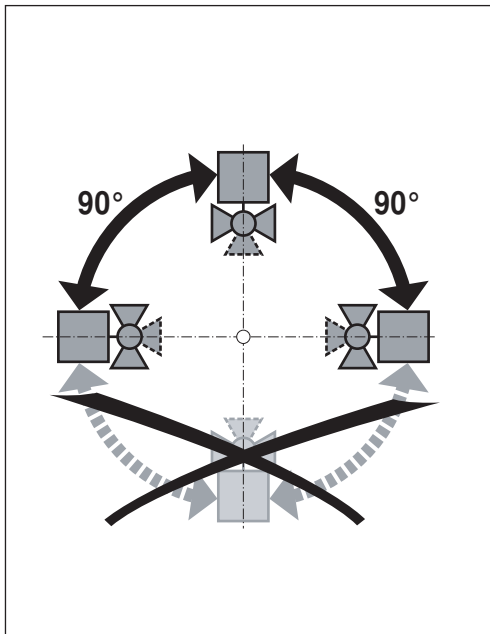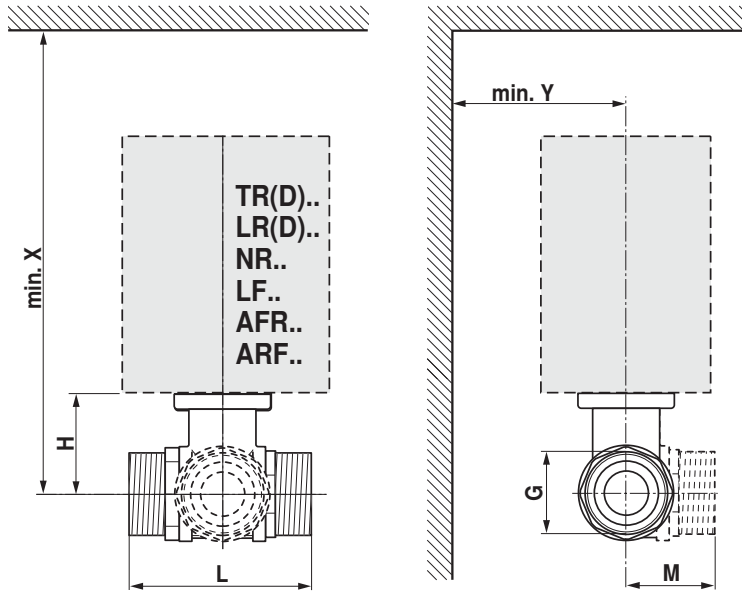

		DN		mm				TR(D)..		LR(D)..		NR..		LF..		AFR.. / ARF..			
		mm	"	G	L	H	M	X	Y	X	Y	X	Y	X	Y	X	Y		
		R405K...R409K	R505K...R508K	10	3/8"	3/4"	69	31.5	34	171	75	185	75	216	80				
		R409...R415	R509...R515	15	1/2"	1"	74	44	38	183	75	197	75	229	80	202	90	202	90
		R417...R420	R517...R520	20	3/4"	1 1/4"	85.5	46	42.5			199	75	231	80	204	90	204	90
		R422...R425	R522...R525	25	1"	1 1/2"	84.5	46	47.5			199	75	231	80	204	90	204	90
		R429...R430	R529...R530	32	1 1/4"	2"	97.5	46	56			199	75	231	80	204	90	204	90
		R431...R432	R531...R532	32	1 1/4"	2"	102	50.5	56					235	80			208	90
		R438...R440	R538...R540	40	1 1/2"	2 1/4"	103	50.5	60.5					235	80			208	90
		R448...R450	R548...R550	50	2"	2 3/4"	115.5	56	71.5					241	80			214	90

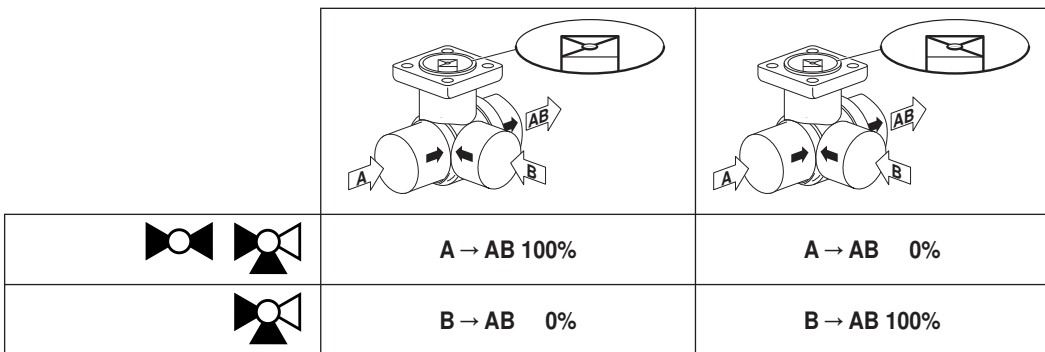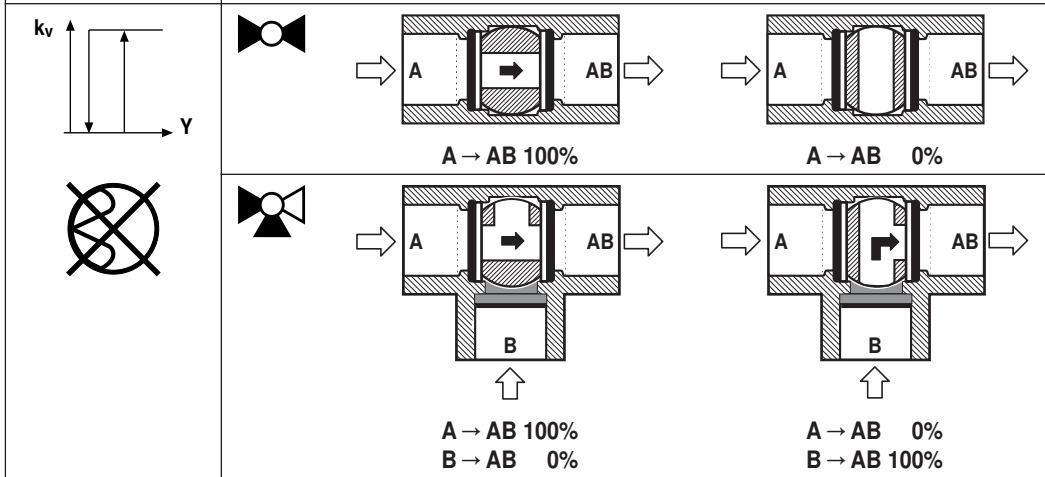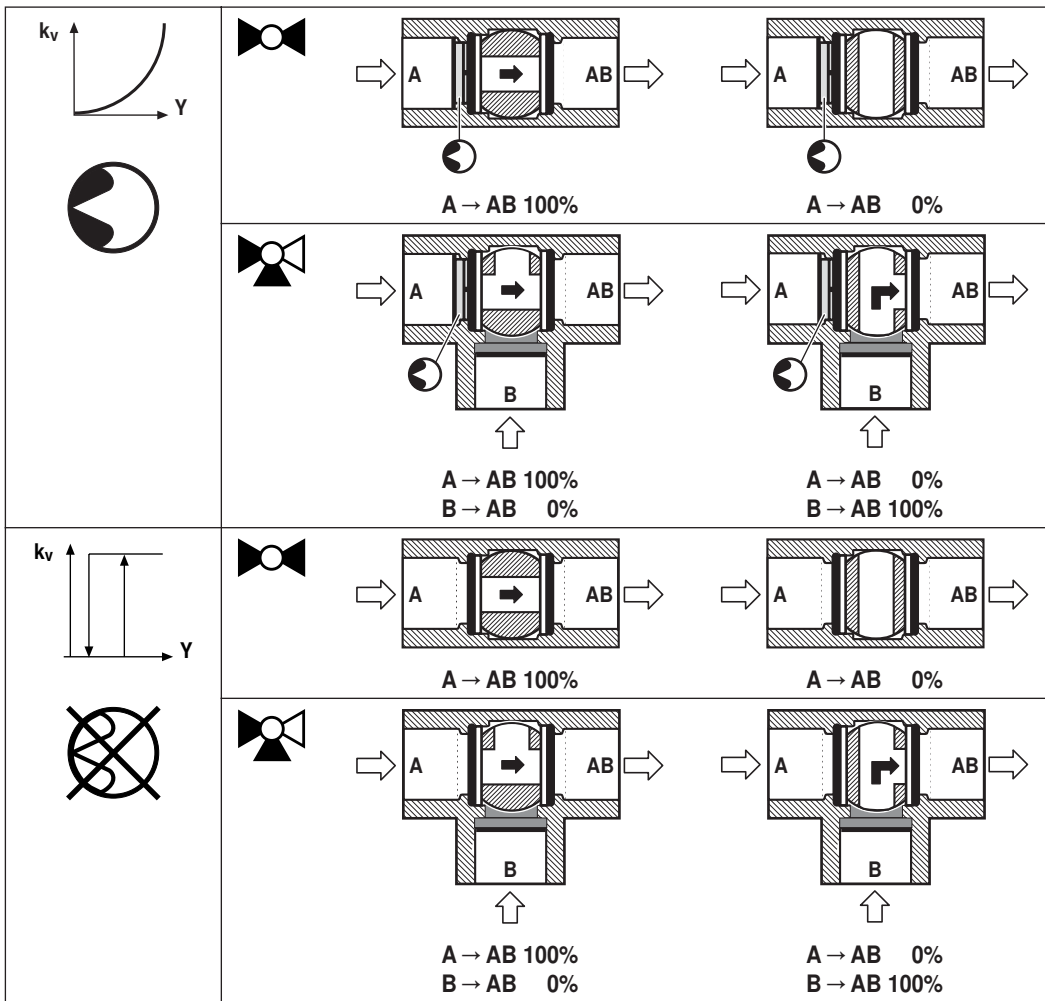

t	(-10°) +5° ... +110° (+120°) C					
$\Delta p_{max}$	< 350 kPa			< 1000 kPa		
$p_s$	4140 kPa			2760 kPa	4140 kPa	2760 kPa
	R405K	R409	R417	R431	R415	R432
	R406K	R410	R418	R438	R420	R440
	R407K	R411	R419	R439	R425	R450
	R408K	R412	R422	R448	R430	
	R409K	R413	R423	R449		
		R414	R424			
			R429			
	R505K	R509	R517	R531	R515	R532
	R506K	R510	R518	R538	R520	R540
	R507K	R511	R522	R548	R525	R550
	R508K	R512	R523		R530	
		R513	R529			

