




technical drawing

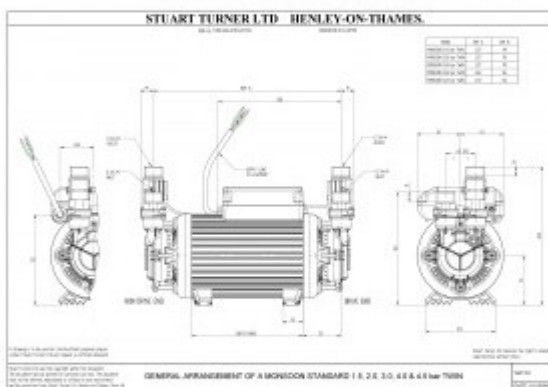

description:

monsoon standard twin pumps are designed for installation into both the hot and cold water supplies -boosting both.

standard pumps operate under positive head conditions and are suitable for installation into open vented hot and cold systems. standard pumps require a minimum gravity flow of approximately 0.6 litres/minute.

supplied complete, pre-wired and have flexible hoses with integral isolating valves

three year guarantee - extendable to 5 years by registering online

finishes:

chrome

guarantee:

3 year guarantee - extendable to 5 years by [registering online](#)

VADO wedmore road cheddar somerset england bs27 3eb

tel 01934 744466 fax 01934 744345 sales@vado-uk.com www.vado-uk.com