

Opac Thermostatic Exposed Shower Valve with Metal Handwheel

Product code

Finish

TSI503ECP-MK

Chrome

- Single sequential control for both temperature and flow
- High performance at pressures as low as 0.1 bar
- Automatic thermostatic shut-off in the event of hot or cold water supply failure
- Check valves and serviceable filters as standard
- Adjustable inlet elbows accommodate centres between 138 and 145mm



Healthcare

Leisure

Education


Thermostatic

WRAS



Recommended items

Extended elbows	87
Isolation elbows	88
Riser pipe, showerheads and arms	69
Slide bar shower kits	81

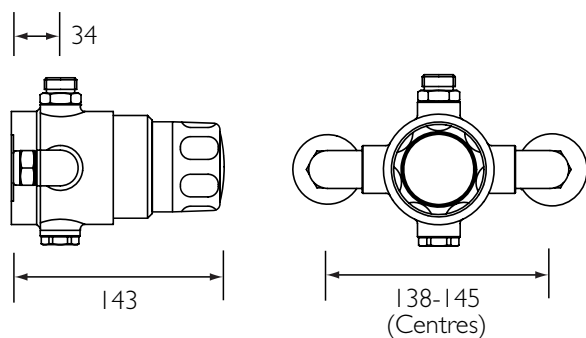

All measurements in mm (unless stated otherwise)
Inlet connection 15mm
Outlet connection 15mm

Performance with open outlet								
Pressure Drop	0.1	0.2	0.5	1	2	3	4	5
Flow Rate	8	12	20	29	40	50	57	64

Call our specifier helpline on 0844 701 6273 or visit www.sirrusshowers.com
Gummers Unit H, Redfern Park Way, Tyseley, Birmingham, B11 2DN, UK

For latest prices and delivery to your door visit MyTub Ltd - www.mytub.co.uk - info@mytub.co.uk 0844 556 1818



TMV3 Designations of use

- HP-S High pressure shower
- LP-S Low pressure shower

Pressures

Minimum Pressure Drop 0.1 bar
Maximum Dynamic Pressure 5 bar
Maximum Static Pressure 10 bar

Temperatures

Factory Preset Temperature 43°C
Max Hot Supply Temperature 80°C