

TECHNICAL DATASHEET



PRISM


PRISM DIVERTER (THREE OUTLETS)

Product Specification

Product Code:	PM 5WDIV C
Finish:	Chrome
Product Type:	Contemporary
Construction:	Bodies are of all brass construction
Cartridge Type:	Ceramic Cartridge Diverter
Supply:	Suitable for all plumbing systems
Inlet Connections:	2 x G 1/2" female
Outlet Connection:	2 x G 1/2" female
Working Pressure:	Min. 0.2 bar, Max. 8.0 bar



© Bristan Group 2009

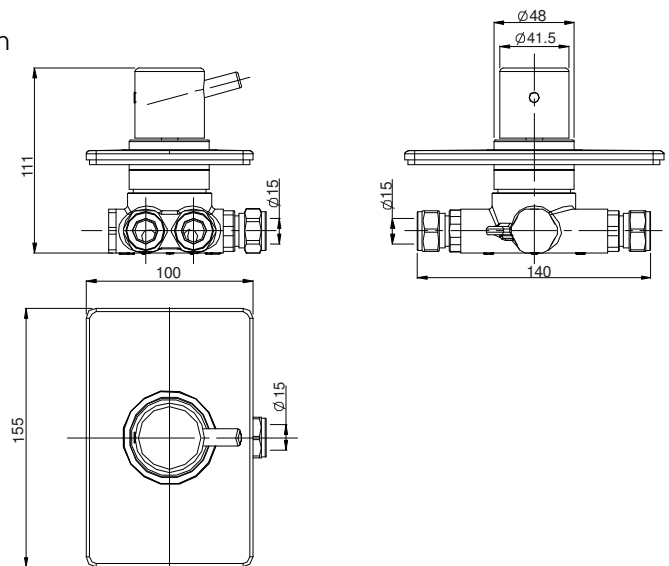

Additional Information

- Three outlet ports giving separate supply to three individual outlets.
- Mixed water must be supplied to the diverter, thus must be used in conjunction with thermostatic shower valve, blending valve or stop cock.
- Must be supported by rigid pipework.
- Diverter does not act as on/off control, will only direct the flow of water.
- Supplied with metal handle.
- Single handle operation.
- To be used in conjunction with our Pick 'N' Mix showering options. Please see our Product and Price Guide for details.
- Chrome plated to BS EN 248.

Technical Advice: For further information please call 0844 7016273 or email customercare@bristan.com.
Guarantee: 5 years covering manufacturing faults.

Compliance/Approvals

Flow Rates (litres per minute, open outlet)

System Pressure	0.2bar	0.5bar	1bar	2bar	3bar	5bar
Exit V	10.5	16.9	24.2	35.4	43.3	54.3
Exit D Top	10.0	16.9	23.9	34.4	42.0	53.3
Exit D Bottom	8.5	14.1	20.6	29.7	36.6	46.3

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
 Telephone: 0844 701 6274 Facsimile: 0844 701 6275
 Web Site: www.bristan.com Email: enquire@bristan.com

