

## TECHNICAL DATA SHEET

### JUTE

#### JUTE MANUAL SURFACE MOUNTED SHOWER VALVE

#### Product Specification

<b>Product Code:</b>	JU SHUAR ISO
<b>Finish:</b>	Chrome
<b>Product Type:</b>	Contemporary
<b>Construction:</b>	Bodies are of all brass construction
<b>Cartridge/Valve Type:</b>	40mm Ceramic Cartridge
<b>Supply:</b>	Suitable for all plumbing systems, preferably balanced
<b>Inlet Connections:</b>	15mm compression elbows
<b>Outlet Connection:</b>	G ½"
<b>Water Pressure:</b>	Min 0.1 bar, Max. 10.0bar
<b>Dimensions for Fitting:</b>	150mm inlet centres


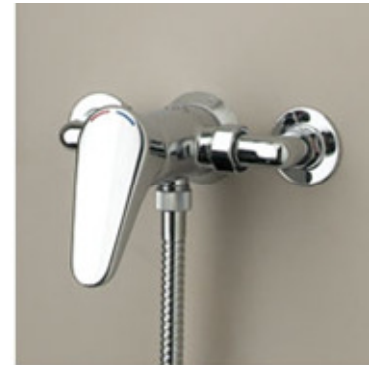


Image for illustration purposes only. Shown with standard elbows.

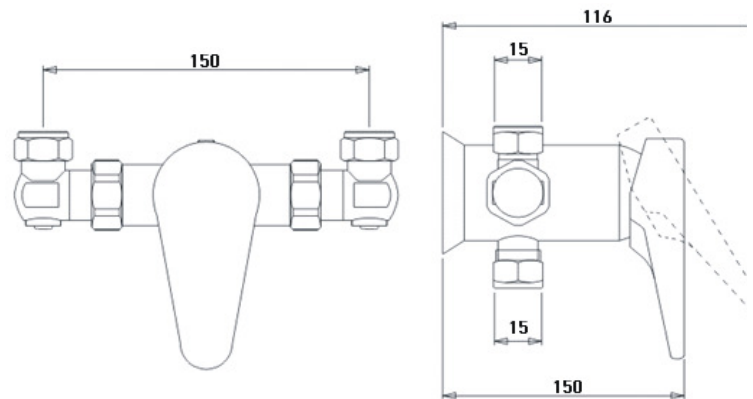

#### Additional Information

- Single Lever Control - Flow and temperature are controlled by an easily operated single handle
- Ceramic cartridge ensures future maintenance, cost and inconvenience is kept to a minimum
- It should be noted this shower is non-thermostatic therefore not sensitive to changes in incoming temperature or pressure
- Isolation elbows with to assist with ease of maintenance & servicing. (150mm centres). Water supplies to valve can be fed from top, bottom or rear

**Technical Advice:** For further information please call 0844 7016273 or email [customer@bristan.com](mailto:customer@bristan.com).  
**Guarantee:** 1 year covering manufacturing faults.

#### Compliance/Approvals

##### Flow Rates (litres per minute)

System Pressure	0.2bar	0.5bar	1bar	2bar	3bar	5bar
JU SHUAR ISO (open outlet)	7.7	12.6	22.2	25.7	31.2	40.2

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG  
 Telephone: 0844 701 6274 Facsimile: 0844 701 6275  
 Web Site: [www.bristan.com](http://www.bristan.com) Email: [enquire@bristan.com](mailto:enquire@bristan.com)



D2

D2