


TECHNICAL DATA SHEET

ORB DUAL CONTROL RANGE ORB SHCVO C


Product Specification

| | |
|---------------------------------|---|
| Product Code: | ORB SHCVO C |
| Finish: | Chrome |
| Product Type: | Contemporary |
| Construction: | Body is of brass construction |
| Supply: | Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature. |
| Inlet Connections: | 15mm Compression connections |
| Working Pressures: | Working pressures 0.2-5.0 Bar |
| Maximum Static Pressure: | 10 Bar |

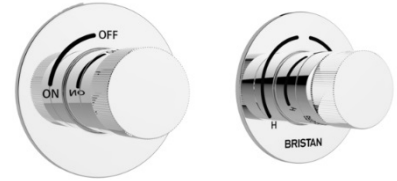

Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 58-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rates at 0.2 Bar (open outlet without flow regulators) 9.0 l/min
- Requires rear access to service the filters
- Cartridge can be accessed from the front

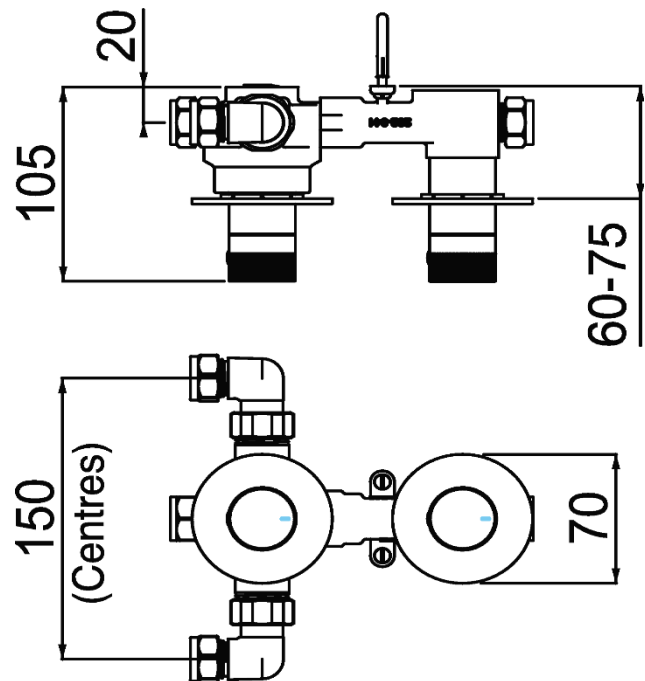

Technical Advice: For further information please call 0844 7016273 or email customer care@bristan.com

Guarantee: 5 years covering manufacturing faults.

| System Pressure | 0.1bar | 0.2bar | 0.5bar | 1.0bar | 2.0bar |
|------------------------|--------|--------|--------|--------|--------|
| ORB SHCVO C - Outlet 1 | 3.9 | 7.5 | 14.1 | 21 | 30.5 |

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
 Telephone: 0844 701 6274 Facsimile: 0844 701 6275
 Web Site: www.bristan.com Email: enquire@bristan.com



The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

D1