

TECHNICAL DATA SHEET



1901 Thermostatic Recessed Three Control Shower Valve with Integral Twin Stopcocks N2 SHC3STP C


Product Specification

Product Code: N2 SHC3STP C
Finish: Chrome
Product Type: Contemporary
Construction: Body is of brass construction
Supply: Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature.
Inlet Connections: 15mm Compression connections
Working Pressures: Working pressures 0.2-5.0 Bar
Maximum Static Pressure: 10 Bar



Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 45-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 9 l/min from stopcock. 12.9l/min from both outlet together
- Fully serviceable from the front

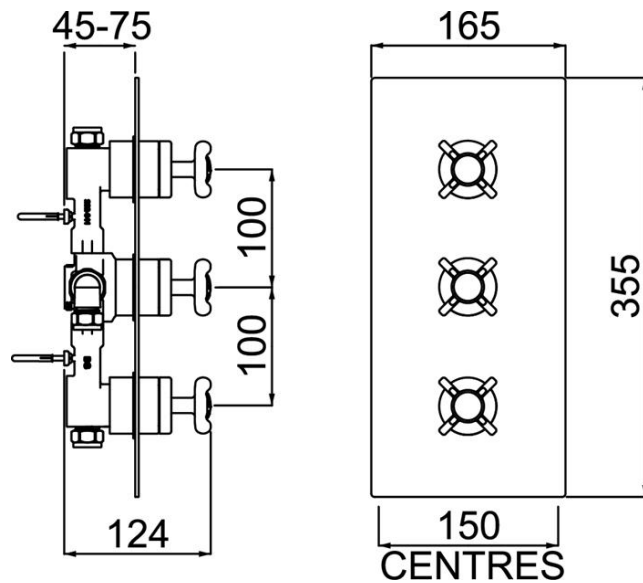

Technical Advice: For further information please call 0844 7016273 or email customer-care@bristan.com

Guarantee: 5 years covering manufacturing faults.

| System Pressure | 0.1bar | 0.2bar | 0.5bar | 1.0bar | 2.0bar |
|-------------------------|--------|--------|--------|--------|--------|
| N2 SHC3STP C - Outlet 1 | 2.8 | 7.7 | 14.2 | 20.7 | - |
| N2 SHC3STP C - Outlet 2 | 2.6 | 7.3 | 14 | 20.8 | - |

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
 Telephone: 0844 701 6274 Facsimile: 0844 701 6275
 Web Site: www.bristan.com Email: enquire@bristan.com



The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

D1