


TECHNICAL DATA SHEET



Orb Thermostatic Recessed Three Control Shower Valve with Stopcock & Two outlet Diverter ORB SHC3DIV C


Product Specification

Product Code: ORB SHC3DIV C
Finish: Chrome
Product Type: Contemporary
Construction: Body is of brass construction and is designed to conform to BS EN 2000
Cartridge Type: Ceramic disc valve
Supply: Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature.
Inlet Connections: 15mm Compression connections
Working Pressures: Working pressures 0.2-5.0 Bar
Maximum Static Pressure: 10 Bar

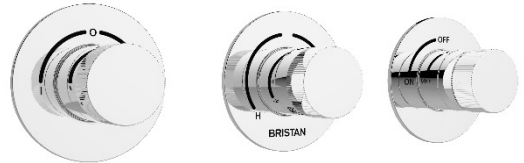

Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 58-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 8 l/min from diverter, 9 l/min from stopcock. 12l/min from both outlet together
- Requires rear access to service the filters
- Cartridge can be accessed from front

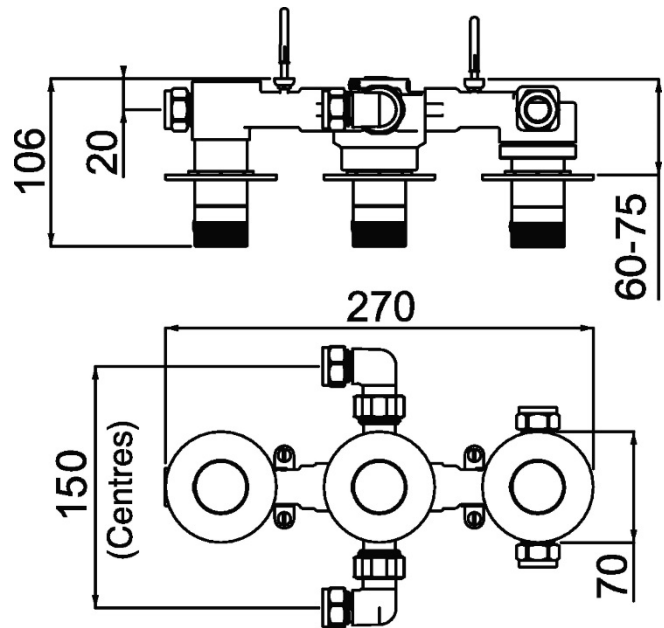

Technical Advice: For further information please call 0844 7016273 or email customer@bristan.com

Guarantee: 5 years covering manufacturing faults.

System Pressure	0.1bar	0.2bar	0.5bar	1.0bar	2.0bar
ORB SHC3DIV C - Outlet 1 (CD Valve)	4.9	8.3	14.5	21.2	-
ORB SHC3DIV C - Outlet 2 (Diverter)	3.7	6.7	12.4	18.5	-
ORB SHC3DIV C - Outlet 3 (Diverter)	3.5	6.6	12.1	18	-

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
 Telephone: 0844 701 6274 Facsimile: 0844 701 6275
 Web Site: www.bristan.com Email: enquire@bristan.com



The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

D1