

# TECHNICAL DATA SHEET



## Pivot Thermostatic Recessed Three Control Shower Valve with Integral Twin Stopcocks PIV SHC3STP C


### Product Specification

**Product Code:** PIV SHC3STP C  
**Finish:** Chrome  
**Product Type:** Contemporary  
**Construction:** Body is of brass construction and is designed to conform to BS EN 2000  
**Cartridge Type:** Ceramic disc valve  
**Supply:** Suitable for all plumbing conditions, preferably balanced. The inlet hot water temperature must be at least 10% above the required blend temperature.  
**Inlet Connections:** 15mm Compression connections  
**Working Pressures:** Working pressures 0.2-5.0 Bar  
**Maximum Static Pressure:** 10 Bar



### Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 45-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 9 l/min from stopcock. 12.9l/min from both outlet together
- Requires rear access to service the filters
- Cartridge can be accessed from front

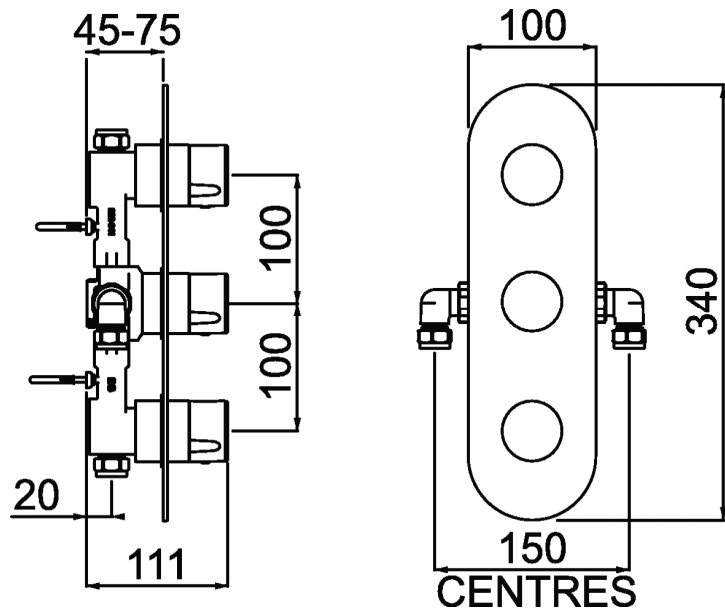

**Technical Advice:** For further information please call 0844 7016273 or email [customer@bristan.com](mailto:customer@bristan.com)

**Guarantee:** 5 years covering manufacturing faults.

System Pressure	0.1bar	0.2bar	0.5bar	1.0bar	2.0bar
PIV SHC3STP C - Outlet 1	2.8	7.7	14.2	20.7	-
PIV SHC3STP C - Outlet 2	2.6	7.3	14	20.8	-

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG  
 Telephone: 0844 701 6274 Facsimile: 0844 701 6275  
 Web Site: [www.bristan.com](http://www.bristan.com) Email: [enquire@bristan.com](mailto:enquire@bristan.com)



The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.