

TECHNICAL DATASHEET

COMMERCIAL OPAC THERMOSTATIC EXPOSED BAR SHOWER VALVE WITH WITH CHROME LEVERS AND FAST FIT CONNECTIONS


Product Specification



Product Code:	OP SHXVO EL C
Finish:	Chrome
Product Type:	Commercial
Construction:	Body is of brass construction and is designed to conform to BS EN 1111:1999 (HP) & BS EN 1287:1999 (LP)
Valve Type:	Thermostatic Cartridge
Supply:	Suitable for all plumbing systems (Preferably balanced)
Inlet Connections:	15mm compression fast fit connections
Outlet Connections:	½" BSP
Working Pressures:	Min 0.2bar, Max 5.0bar Maximum Static Pressure: 10.0 bar
Dimensions for Fitting:	150mm inlet centres

Additional Information

- Cool touch shower valve body for ultimate user safety.
- Easy installation with first/second fix fixing kit.
- Integral isolator & flushing mechanism for easy maintenance.
- High performance at low pressures.
- TMV2 & TMV3 approved.
- Complies with D08 specification.

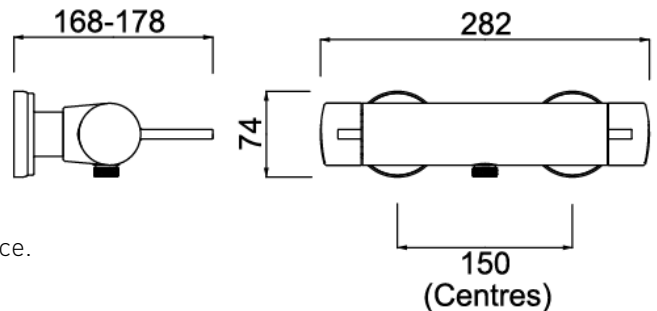

Technical Advice:	For further information please call 0844 7016273 or email customer@bristan.com
Guarantee:	1 year covering manufacturing faults.

Compliance / Approvals

WRAS:	Certificate N ^o : 1409054		
TMV2:	Certificate N ^o : BC1397/0714	TMV3:	Certificate N ^o : BC1402/0614

Flow Rates (litres per minute)

System Pressure	0.2bar	0.5bar	1bar	2bar	3bar	4bar	5bar
With Flow Regulator Fitted	-	9.4	9.5	11.3	11.8	11.7	11.4

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
Telephone: 0844 701 6274 Facsimile: 0844 701 6275
Web Site: www.bristan.com Email: enquire@bristan.com



The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

D2