


## 1901

### 1901 THERMOSTATIC RECESSED DUAL CONTROL SHOWER VALVE

#### Product Specification

<b>Product Code:</b>	N TSHCVO C/G
<b>Finishes:</b>	Chrome (C), Gold (G)
<b>Product Type:</b>	Traditional
<b>Construction:</b>	Bodies are of all brass construction
<b>Cartridge/Valve Type:</b>	¼ turn ¾" ceramic disc on/off control with thermostatic temperature control
<b>Supply:</b>	Suitable for all plumbing systems, preferably balanced
<b>Inlet Connections:</b>	15mm compression, 150mm centres
<b>Outlet Connection:</b>	15mm compression
<b>Water Pressure:</b>	Min 0.1 bar, Max. 8.0 bar

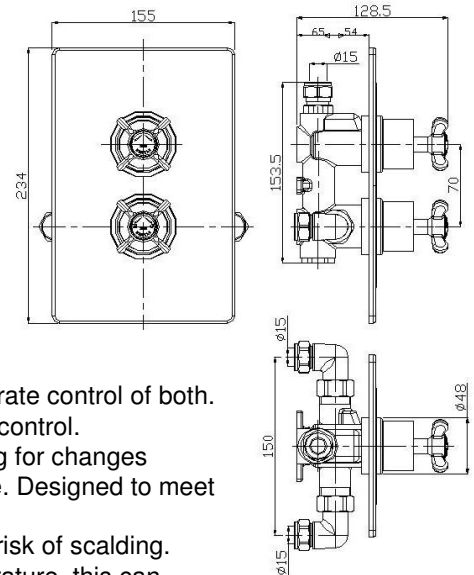

Will suit minimum wall cavity depth: 55mm

#### Additional Information

- Dual control – flow and temperature are controlled by separate handles, giving accurate control of both.
- Ceramic disc flow valve giving low maintenance and an easy ¼ turn on/off and flow control.
- Thermostatic cartridge maintains showering temperature to +/- 1 °C by compensating for changes in the incoming water temperature and pressure giving the stable outlet temperature. Designed to meet requirements of BS EN 1287:1999 and BS EN 1111:1999
- Automatic shut off in the event of hot or cold water supply failure, thus reducing the risk of scalding.
- Factory set to a maximum of 42 °C to eliminate the ability to select an unsafe temperature, this can be adjusted to suit user preference.
- Swivel inlet elbows with 150mm centres, valve can be fed from top, bottom or rear.
- Shower supplied as 'valve only' and thus can be customised by choosing accessories from our Pick 'N' Mix showering options. Please see our Product and Price Guide for details.
- Hose outlet included.
- Extension kit available to cater for thicker wall thicknesses. Order separately – SHC EXT01 C
- Chrome plated to BS EN 248.

**Technical Advice:** For further information please call 0844 7016273 or email [customer@bristan.com](mailto:customer@bristan.com).  
**Guarantee:** 5 years covering manufacturing faults.

#### Compliance/Approvals

**WRAS:** Certificate No. 1007015

**Flow Rates** (litres per minute, open outlet)

System Pressure	0.2bar	0.5bar	1bar	2bar	3bar	5bar
N TSHCVO C/G	8.7	13.1	19.0	27.5	33.6	43.4

