

QUADRANT


QUADRANT THERMOSTATIC RECESSED DUAL CONTROL SHOWER VALVE

Product Specification

Product Code:	QT SHCVO C
Finish:	Chrome
Product Type:	Contemporary
Construction:	Body is of brass construction
Valve Type:	3/4" standard valve
Cartridge Type:	Thermostatic cartridge
Supply:	Suitable for all plumbing systems, preferably balanced
Inlet Connections:	15mm compression elbows
Outlet Connection:	15mm compression
Water Pressure:	Min 0.1bar, Max. 8.0bar
Dimensions for Fitting:	150mm inlet centres



Will suit minimum
wall cavity depth:
55mm

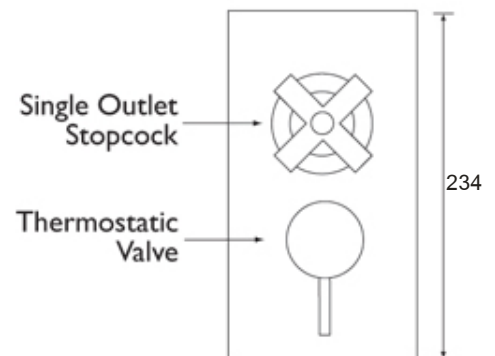

Additional Information

- Dual control – flow and temperature are controlled separately, giving accurate control of both.
- Thermostatic cartridge maintains showering temperature to +/- 1°C by compensating for changes in the incoming water temperature and pressure giving the stable outlet temperature.
- Automatic shut off in the event of hot or cold water supply failure, thus reducing the risk of scalding.
- Factory set to a maximum of 42°C to eliminate the ability to select an unsafe temperature – this is adjustable to suit user preference.
- Swivel inlet elbows with 150mm centres, valve can be fed from top, bottom or rear.
- Shower supplied as 'valve only' and thus can be customised by choosing accessories from our Pick 'N' Mix showering options. Please see our Product and Price Guide for details
- Shower supplied as 'valve only' and thus can be customised by choosing accessories from our Pick 'N' Mix showering options. Please see our Product and Price Guide for details.
- Hose outlet included
- Extension kit available to cater for thicker wall thicknesses. Order separately – SHC EXT01 C
- Chrome plated to BS EN 248

Technical Advice: For further information please call 0844 7016273 or email customer@bristan.com.
Guarantee: 5 years covering manufacturing faults.

Compliance/Approvals

WRAS: Pending

Flow Rates (litres per minute, open outlet)

System Pressure	0.2bar	0.6bar	1bar	2bar	3bar
QT SHCVO C	9.2	18.0	24.0	33.9	42.1