


## 1901

### 1901 THERMOSTATIC SURFACE MOUNTED SHOWER VALVE

#### Product Specification

<b>Product Code:</b>	N CSHXVO C / N CSHXVO G
<b>Finishes:</b>	Chrome / Gold
<b>Product Type:</b>	Traditional
<b>Construction:</b>	Body is of brass construction
<b>Cartridge Type:</b>	Thermostatic cartridge
<b>Supply:</b>	Suitable for all plumbing systems, preferably balanced
<b>Inlet Connection:</b>	15mm compression elbows
<b>Outlet Connection:</b>	G 1/2"
<b>Water Pressure:</b>	Min 0.1bar, Max. 5.0bar
<b>Dimensions for Fitting:</b>	150mm inlet centres

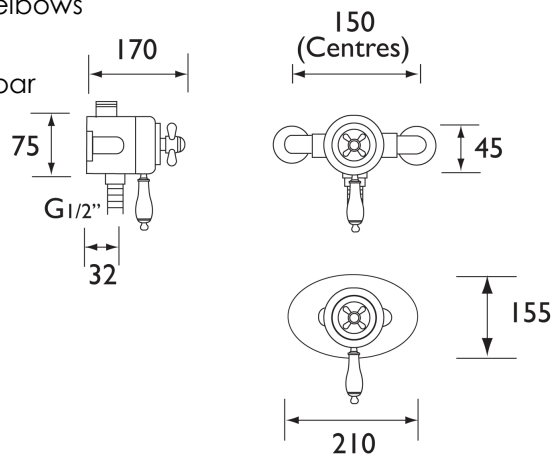

#### Additional Information

- Dual control – flow and temperature are controlled separately, giving accurate control of both.
- Thermostatic cartridge maintains showering temperature to +/- 1°C by compensating for changes in the incoming water temperature and pressure giving the stable outlet temperature.
- Automatic shut off in the event of hot or cold water supply failure, thus reducing the risk of scalding.
- Factory set to a maximum of 42°C to eliminate the ability to select an unsafe temperature – this is adjustable to suit user preference.
- Swivel inlet elbows with 150mm centres, valve can be fed from top, bottom or rear.
- Concealing plate kits available separately – KIT UNI OVL1 C (Chrome), KIT UNI OVL1 G (Gold).
- Shower supplied as 'valve only' and thus can be customised by choosing accessories from our Pick 'N' Mix showering options. Please see our Product and Price Guide for details
- Chrome plated to BSN 248.

**Technical Advice:** For further information please call 0844 7016273 or email [customer@bristan.com](mailto:customer@bristan.com)  
**Guarantee:** 5 years covering manufacturing faults.

#### Compliance/Approvals

**WRAS:** Pending



#### Flow Rates (litres per minute, open outlet)

System Pressure	0.2bar	0.5bar	1bar	2bar	3bar	5bar
N CSHXVO	9.5	15.1	23.3	31.8	38.9	50.2

