

# D202/203 Bronze Radiator Valve

## Materials

PART	MATERIAL	MATERIAL SPEC
Body	Bronze	BE EN 1982 (CC491K)
Bonnet	Brass	BS EN 12165 CW617N
Disc	Brass	BS EN 12164 CW614N
Stem	Brass	BS EN 12164 CW614N
*Packing	Asbestos Free	-
Gland	Brass	BS EN 12164 CW614N
Packing Nut	Brass	BS EN 12164 CW614N
†Tailpiece	Brass	BS EN 12164 CW614N
Tailpiece Ring	Brass	BS EN 12165 CW614N
Shield	Brass	BS EN 12449 CW503L or 505L
Compression Olive	Brass	BS EN 12449 CW503L or 505L
Compression Adaptor	Brass	BS EN 12164 CW614N



\* Recommended spare

† Internal drive: Size 1/2" - to suit 12mm hex socket wrench, Size 3/4" - to suit Crane Fig. P113 radiator union wrench


## Dimensions and Weights

SIZE	WEIGHT KGs	A	B	C
1/2"	0.30	61.8	27	72.4
3/4"	0.45	69.3	30.3	82.1
1"	0.85	75	35.8	73.9

## Pressure/Temperature Ratings Threaded

TEMPERATURE °C	0 to 40	60	80	100	120	126
PRESSURE (bar)	14.0	13.1	12.3	11.4	10.4	1.4

## Dimensional Drawing

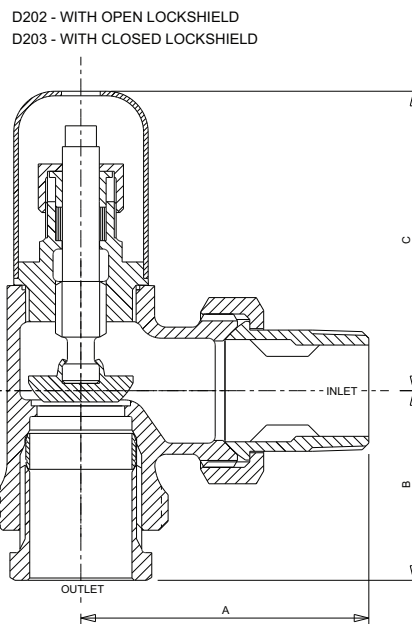

**PRESSURE RATING:** PN10

**END CONNECTION:** Threaded ISO 228-1. 1/2" and 3/4" - parallel outlet. 1" - BS EN 10226-2 taper outlet. Union nut and tailpiece threaded BS 21 on inlet.

Please note only sizes 1/2" and 3/4" have combi ends to allow connection to copper pipe.

**TESTING:** Each valve is individually tested to BS 2767

**OPERATOR:** D202- Lockshield for key operation  
D203- Closed Lockshield

**SPECIFICATION:** Matt finish only.



CRANE HOUSE  
EPSILON TERRACE,  
WEST ROAD, IPSWICH  
SUFFOLK IP3 9FJ

TELEPHONE: +44 (0) 1473 277 300  
FAX: +44 (0) 1473 277 301  
EMAIL: [enquiries@cranefs.com](mailto:enquiries@cranefs.com)  
[www.cranefs.com](http://www.cranefs.com)

The Company reserve the right to amend any product without notice.

CFS\_DS\_D202\_D203\_1109