


# Elina Bar Bottom Outlet

## thermostatic mixer shower

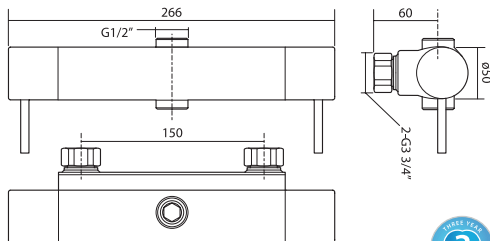

Dimensions given are approximate

**WRAS**  
APPROVED  
PRODUCT



### Operating Features

- Thermostatic temperature control to within 2°C
- Separate flow and temperature controls
- Automatic shutdown if hot or cold supplies fail
- Tamper proof lever controls
- Simple to install and maintain
- Factory set maximum temperature at 38°C
- Flow limiters supplied

Ideal use in hotels and guest houses

Finish	Code
Chrome	ELITHBM

Temperature Control	Thermostatic
Inlet Connections	1/2" BSP to 3/4" flat face union
Water Entry Points	Back
Outlet Connection	1/2" BSP bottom
Plumbing System Compatibility	Low and High pressure
Minimum Running Pressure/Flow	0.1 Bar @ 8 l/min
Maximum running pressure	5 Bar
Open outlet flow at 0.1 Bar	5.7l/min
Maximum Static Pressure	10 Bar
Maximum Flow with Flow Limiters Fitted	12l/min
Pipe Inlet Centres	150mm
Approvals, Complies with	BS EN 1111, 1287
Guarantee	3 years