



Commercial & public fittings > W.C. flush valves > Electronic flush valve sets > Electronic flush valve FOR WC PANS

## TEMPOMATIC "THROUGH THE WALL" WC :

### SPECIFICATIONS

Electronic valve for WC pan, with voluntary or automatic activation, for "through the wall" mounting and installation in technical back-space. Kit including detector in chrome plated plate on "through the wall" support, electronic unit with solenoid valve 12V. MM 1", safety transformer 230/12V., stop cock, vacuum-breaker outlet Ø32 with connection washer Ø32/55 and clamp. Brand DELABIE type TEMPOMATIC TC 150mm. for WC pan. Ref. 463150

Réf. : 463030 : for wall from 1 to 30mm.

Réf. : 463150 : for wall from 1 to 160mm.

Réf. : 463200 : for wall from 1 to 225 mm.

- » • We recommend to provide the flush tube (see below).
- Other "through the wall" supports and anti-interference screened wire lengths are available on request.





### FONCTIONING AND APPLICATION

- Detection of the user after 8 sec. of presence (avoids inopportune activations).
- VOLUNTARY flushing ACTIVATION by approaching the hand in front of the detector, or AUTOMATIC ACTIVATION 4 sec. after the user has left in case he forgot the voluntary action.
- Use: every public and commercial WC with technical back-space (stadiums or sport centers, motorway parking areas...).

### PRODUCT ADVANTAGES

- AUTOMATIC ACTIVATION in case of forgetting of the VOLUNTARY ACTIVATION.
- FULL HYGIENE of activation without manual contact (avoids the popagation of bacteria/germs carried by the hands).
- COMFORT OF USE and removal of bad smells too frequent in some collective sanitaraires.
- ENDURANCE and RELIABILITY: upstream filter, scale-proof solenoid valve, waterproof and shock-proof INFRARED PRESENCE DETECTOR.
- SECURITY: inviolable fixing, electronic anti-interference screened wire and anti-blocking in flow safety.
- EASY MAINTENANCE with separate electronic control box with autodiagnostic leds.
- EASY INSTALLATION with led helping to put into service, and adjustable detection distance from 50 to 90 cm.
- 3 YEARS WARRANTY

463150

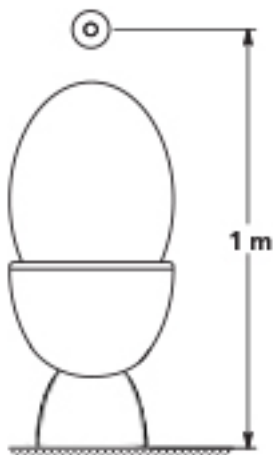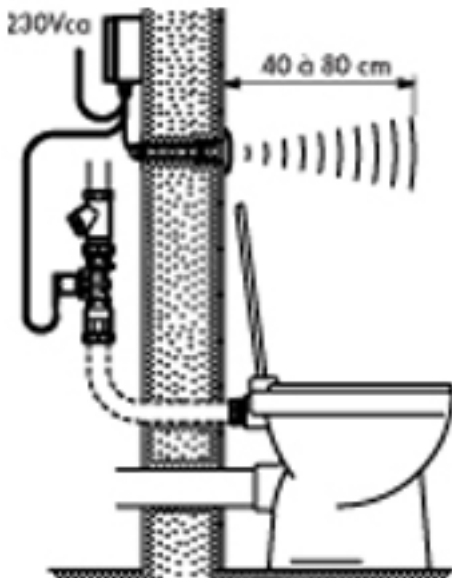

- 1 Déclenchement volontaire sans contact** : l'utilisateur actionne la chasse en approchant la main du détecteur de présence. Arrêt automatique du rinçage après 7 secondes.



- 2 Déclenchement automatique sans contact** en cas d'oubli de la part de l'utilisateur : rinçage automatique pendant 7 secondes après le départ de l'utilisateur.
- système en veille et prise en compte de la présence de l'utilisateur.
  - rinçage automatique au départ de l'utilisateur.