

EXPOSED TEMPOFLUX Kit WC pan :

SPECIFICATIONS

Automatic shut-off direct flush valve kit for traditional WC or children pan for exposed mounting. Kit including: push button 7 sec. delay shut-off TEMPOFLUX 3/4" flush valve, complete elbow tube Ø28 with nut, collar and connection washer Ø28/55 with clamp. 10 years warranty. Brand DELABIE type TEMPOFLUX exposed kit for traditional WC or children pan. Ref. 761002 (with angled stop cock)

Réf. : 761002 : 761000 with angled stop cock

Réf. : 761003 : 761001 with integrated stop cock

Réf. : 761004 : 761000 without stop cock

- » • Ready for setting, no accessory required.
- Recommended pressure: 2 to 4 bar : flow rate 1,65l./sec. at 2 bar (1,25l./sec. at 2 bar with 765020 stop cock). Inlet connection from Ø20 interior, and outlet Ø28 (brass tube) or Ø32/26 (PVC tube).




FONCTIONING AND APPLICATION

- Opening by pressing the push button.
- Automatic shut-off delay 7 sec.
- Use: public and commercial place and particularly hospitals, day nurseries, schools...

PRODUCT ADVANTAGES

- SMOOTH OPENING adapted to children and disabled person.
- HIGH RESISTANCE TO VANDALISM: Chrome plated solid brass valve with shock proof mechanism and tube fixing reinforced by collar.
- EFFICIENCY WITHOUT SERVICING of the direct flush (tanks are unsuitable for public sanitariums, get scaled, impurities and require a more frequent and difficult servicing).
- RELIABILITY: unmatched endurance, and scale, corrosion and foolproof mechanism. Self-cleaning hydraulic delay device.
- EASY MAINTENANCE: Interchangeable mechanism cartridge.
- 10 YEARS WARRANTY

761002

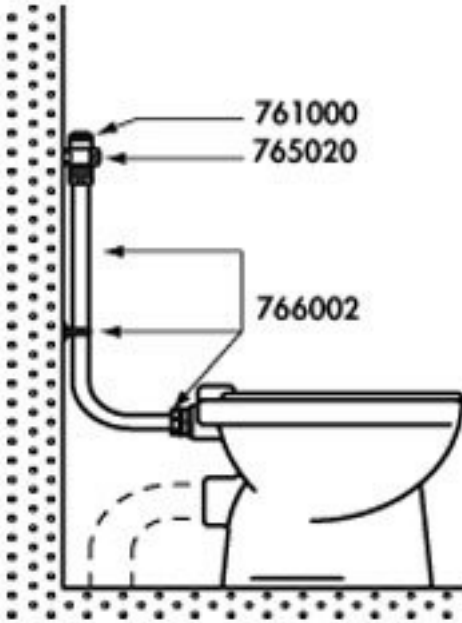

761004

