

**Vertical, wall mounted stainless steel AISI 304 satin finish**

Código: **DJ0030CS**

**General description**


- Liquid soap dispenser, wall mounted.
- Push-button operated.
- Robust and vandal-resistant.
- Suitable for high traffic facilities.
- Model suitable for public use.
- It normally goes along with a warm air hand dryer.

**Components and Materials**

- Stainless steel AISI 304 body, top filling lid and push-button, 0,8 mm thick, satin finish. It is mounted on the wall by means of 4 wood screws with their corresponding 5 mm wall plugs (the lower ones attach the dispenser, whilst the upper ones fix it to the wall) (screws and wall plugs are provided).
- Anti-dripping and anti-corrosion valve. Design based on a polyamide piston with 2 elastomeric toroidal gaskets, silicone blocking pivot and stainless steel ball to ensure tightness.
- Thermoplastic container, 3 mm thick. Access to its interior using a standard mediclinics ® key supplied.
- Stainless steel AISI 304 springs.
- Housing with 1 viewing slot.
- Suitable soaps: Hand soaps, with neutral PH, not containing chlorine.

**Technical Specifications**

Dimensions - 200 x 118x 115 mm
Capacity - 1,1 L
Quantity dispensed per pulsation - 1- 1,2 ml
Operable force - 26 N
Weight (empty dispenser) - 1,0 Kg
Recommended installation height from the self - 15-20 cm

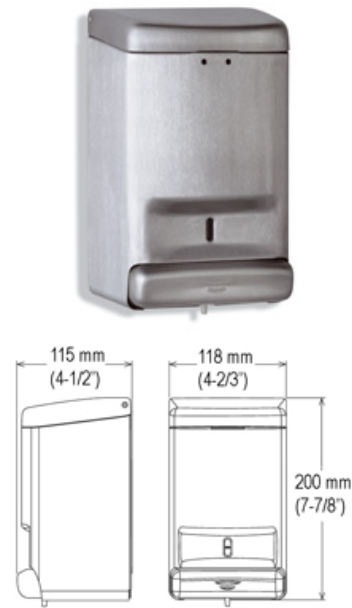

Dim.: ±4%

**Operation**

Press push-button manually to dispense a measured amount of liquid soap. Valve is operable with one hand, without tight grasping, pinching, or twisting of the wrist.

**Certificates & Qualifications**

ISO 9001:2008.

**Specifications**

Wall mounted soap dispenser, robust and vandal-resistant with a body, top filling lid and push-button made of stainless steel AISI 304, 0,8 mm thick, satin finish. It should be mounted on the wall by means of 4 wood screws with their corresponding 5 mm wall plugs; the lower ones attach the dispenser, whilst the upper ones fix it to the wall. The dispenser should include an anti-dripping and anti-corrosion valve which is based on a polyamide piston with 2 elastomeric toroidal gaskets, silicone blocking pivot and stainless steel ball to ensure tightness. The thermoplastic container should be 3 mm thick and the access to its interior should be using a standard mediclinics ® key supplied. The dispenser should be provided with stainless steel AISI 302 springs and housing with 1 viewing slot. The soap dispenser should be suitable for commercially marketed all purpose liquid and lotion hand soaps and synthetic detergents except for surgical soaps. Overall dimensions shall be 206 x 117 x 116 mm. Liquid soap dispenser shall be model DJ0030CS, stainless steel AISI 304 satin finish, manufactured by Mediclinics S.A., C/ Industria 54, E-08025 Barcelona, Spain.

Mediclinics, S.A., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.

mediclinics S.A

