



The Oventrop Quality Management System is certified to DIN-EN-ISO 9001

## Cast iron gate valve PN 10

### Tender Specification:

Oventrop cast iron wedge gate valve with both ends flanged PN 10 (up to DN 150 also suitable for PN 16). Inside screw, non-rising stem. Handwheel operated.

Body, bonnet and stuffing box assembly made of cast iron. Stem and seat rings made of brass. Stem seal with teflon impregnated, asbestos free packing.

PN 10 up to 120°C  
Round flanges according to DIN EN 1092-2, PN 10 and BS 4504 PN 10.

### Function:

Oventrop cast iron gate valves are suitable for most general isolating purposes on non-aggressive fluids.

The non-rising stem compliments the compact design and allows for use in confined spaces.

### Materials:

Body, bonnet and stuffing box assembly made of cast iron (EN-GJL-250 DIN EN 1561); stem and seat rings made of brass; handwheel made of steel. Teflon impregnated, asbestos free gland packing.


### Application:

Non-aggressive fluids up to 120°C, water, mineral, heating and hydraulic oils.

### Sizes:

DN	Item No.
DN 40	104 51 49
DN 50	104 51 50
DN 65	104 51 51
DN 80	104 51 52
DN 100	104 51 53
DN 125	104 51 54
DN 150	104 51 55
DN 200	104 51 56
DN 250	104 51 57
DN 300	104 51 58

### Dimensions:

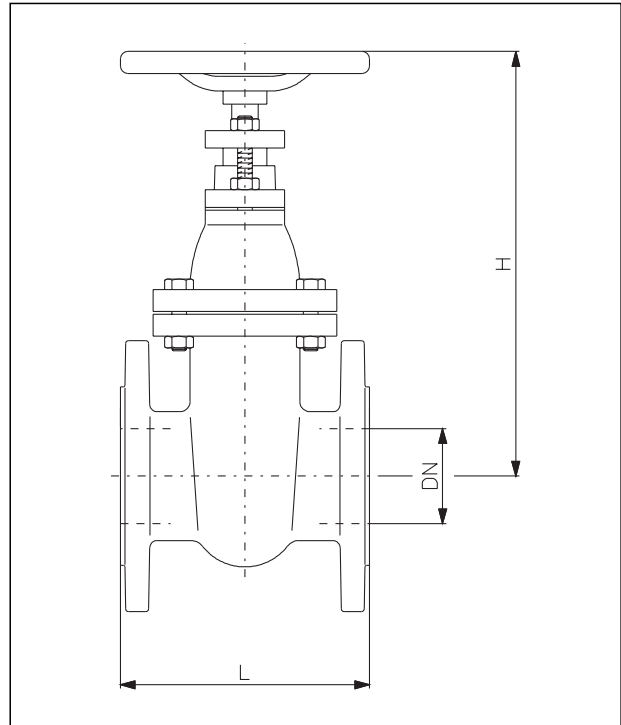

DN	L	H	Kg
40	140	230	9
50	150	245	11
65	170	290	15
80	180	315	18
100	190	355	22
125	200	415	31
150	210	460	40
200	230	545	60
250	250	635	86
300	270	720	135