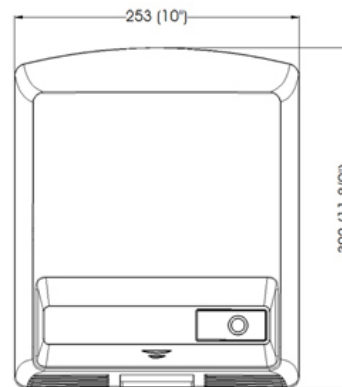


**JUNIOR PLUS PUSH-BUTTON OPERATED
WHITE ABS**
Código: M88 PLUS
General description


- Warm air hand dryer.
- Push-button operated.
- Suitable for medium and high traffic facilities.
- Compact appliance.
- Highest durability in its class.
- It normally goes along with a soap dispenser.


Components and Materials

- White ABS thermoplastic one-piece cover, 3 mm thick. Cover fixed to the base by means of 4 Allen head screws.
- Engineering thermoplastic ABS UL 94-V0 base and fan scroll, with 4 Ø 6 mm holes for wall mounting.
- Induction motor, 2.800 rpm, maintenance-free and high durability, incorporates a safety thermal cut-off.
- PP UL94-V0 with single inlet fan wheel.
- Waved wire NiCr heating element that incorporates a safety thermal cut-off.
- Push-button activates an electronic timer, with a 45 second cycle.
- Zamak air outlet grill.


Technical Specifications

Voltage - 220-240 V	Total power - 1640 W
Frequency - 50/ 60 Hz	Motor power - 140 W
Electrical isolation - class II	Heating element power - 1500 W
Dimensions - 302 x 253 x 149 mm	Consumption - 7 A
Weight - 3 Kg	RPM - 2800
Effective airflow - 240 m ³ /h / 4000 l/min	Air temperature (10 cm distance / 21 °C) - 52 °C
Nominal airflow - 280 m ³ /h / 4670 l/min	Noise level (at 2 m) - 60 dB
Air velocity - 65 Km/h	Protection level - IP21

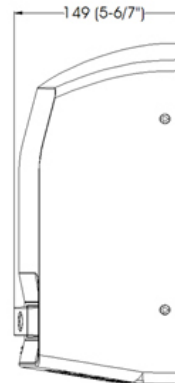

Dim.: ±4%

Operation

Press the button to initiate the drying process. The dryer will go on with no interruption for 45 seconds.

Installation

Please refer to Back

Certificates & Qualifications

ISO 9001:2008, CE, GS, EMC (VDE), GOST.

Compliant with electrical safety directives 2006/95/EC and electro-magnetic compatibility directives 2004/108/CE.

Mediclinics, S.A., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.

mediclinics S.A



Mediclinics, S.A., reserves the right to make changes and/or modifications to the products and their specifications without prior notice.

mediclinics S.A

